

## Refrigeration Equipment 10-Tub Ice Cream Dipping Cabinet 67.75" Long

ITEM # \_\_\_\_\_

MODEL # \_\_\_\_\_

NAME # \_\_\_\_\_

SIS # \_\_\_\_\_

AIA # \_\_\_\_\_



738374 (KCICDC10FH)

10-Tub Ice Cream Dipping  
Cabinet 67.75" Long

### Short Form Specification

Item No. \_\_\_\_\_

Front of the house display ice cream or gelato dipping cabinet. Exterior & interior panels stainless steel painted white, bottom panel is galvanized steel, top panel is galvanized material painted white to match. Fin & tube condenser to improve the performances in high-temperature environments. Automatic Defrost Cooling System and temperature control. Includes (1) NSF® certified temperature gauge, and (10) barrel ice cream tub frames; (12) gelato pan is an available option. Front is radius white plastic, lit from behind, for customer supplied signage if desired. Additional freezer storage on operator side.

Ropack tub bracket insert included after select serial number 004352000182

### Main Features

- Fan cooled condenser to cope with heavy duty conditions
- Included as standard 1 NSF® certified temperature gauge and 10-barrel ice cream tub frame.
- Bottom drain with plug for easy interior cleaning and defrost water discharge
- Electronic Temperature Control, quick and simple to set, with control display for easy monitoring.

### Construction

- Tempered glass viewing panels & sliding lids
- Plexiglass sliding shields.
- Exterior and Interior finish in white
- Locking lids and key protect the contents of the unit.
- Heavy-duty, locking casters keeps the unit in place but allow position adjusting.


### Sustainability

- Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3) - CFC and HCFC free.
- Low energy consumption thanks to high efficiency components, insulation and optimized airflow.

### Optional Accessories

- Combined 5L Pan Support Metal Frame & 5L Pan Support Acrylic Frame for 10 Tub Ice Cream Dipping Cabinet PNC 882015

APPROVAL: \_\_\_\_\_

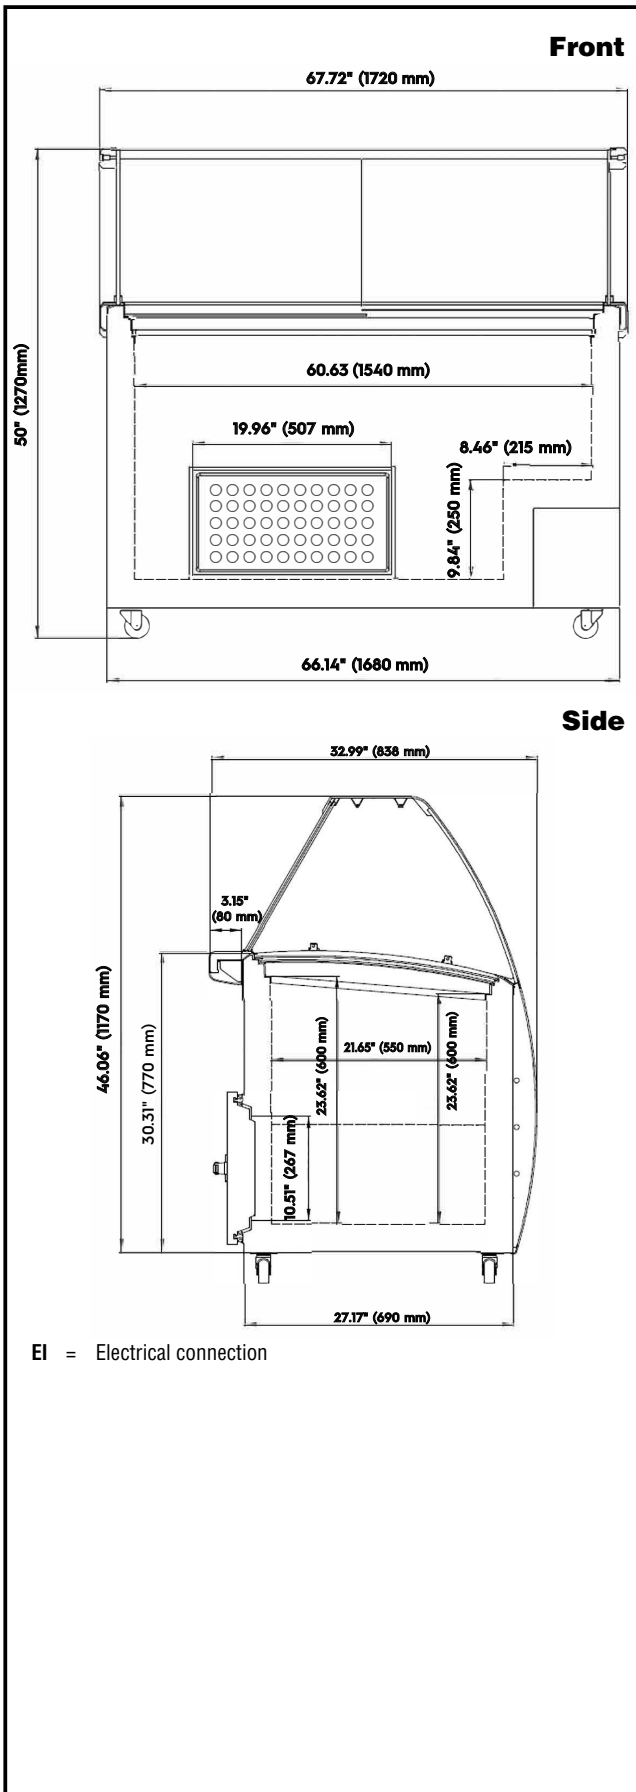

## Electric

Supply voltage:	115 V/1 ph/60 Hz
Electrical power, max:	0.4 kW
Plug type:	USA NEMA 5-15P

## Capacity:

Gross capacity:	20.3 cu.feet
-----------------	--------------

## Key Information:

Warranty:	3 / 5 years
Capacity:	20.306 cu.ft.
External dimensions, Width:	67 3/4" (1720 mm)
External dimensions, Depth:	33 " (838 mm)
External dimensions, Height:	50 " (1270 mm)
Internal Dimensions (depth):	21 5/8" / (550 mm)
Internal Dimensions (height):	23 5/8" / (600 mm)
Internal Dimensions (width):	60 5/8" / (1540 mm)
Shipping height:	50 9/16" (1285 mm)
Shipping weight:	439 lbs (199 kg)
Shipping volume:	84.36 ft <sup>3</sup> (2.39 m <sup>3</sup> )
Type of external material:	Prepainted white
Type of internal material:	White Prepainted Steel
Approvals	ETL C&US;ETL SANITATION

## Refrigeration Data

Condenser type:	Fin & tube
Operating temperature min.:	-18.4 °F
Compressor power:	1/2 hp
Operating temperature max.:	6.8 °F
Defrost type:	Automatic

## Sustainability

Current consumption:	4.1 Amps
Refrigerant type:	R290
GWP Index:	3
Refrigerant weight:	130 g