


CLEAN DISH TABLES

Straight Design

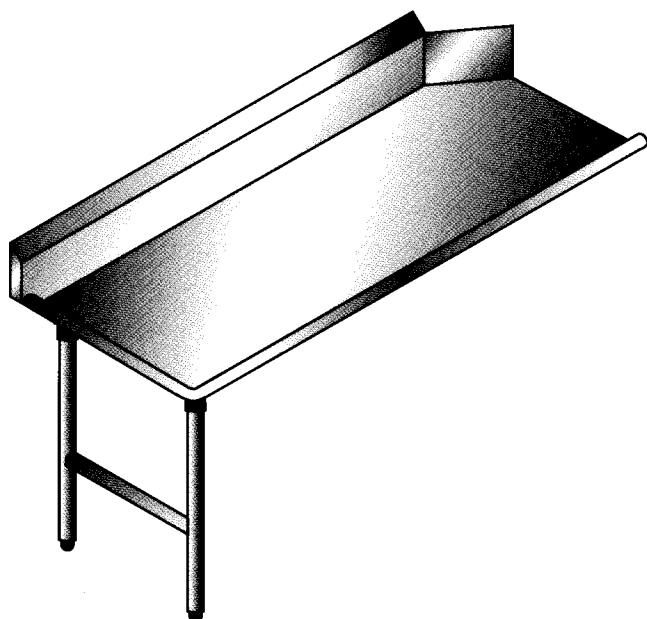

FEATURES

- Sanitary 180° rolled edges at free sides..
- $\frac{5}{8}$ " radius on all corners for ease of cleaning.
- Tops are sound deadened.
- Stainless steel under bracing locations provide solid top and minimal deflection.

CONSTRUCTION

- Top:** All edges shall be die formed with corners welded to form one-piece sanitary unit. All welds shall be ground and finished to blend with adjacent surfaces.
- Bracing:** Shall be stainless steel C-channels front and back at leg locations and left to right at center of table.
- Legs:** Shall be $1\frac{5}{8}$ " O.D. Stainless Steel H-frame legs.
- Backsplash:** Shall be integrally formed 9" high including 2" return at 45° angle with ends closed.

CHOOSE FROM TWO AVAILABLE SERIES

Standard Series
16 Gauge Type 304 S/S
S/S H-Frame Legs

Spec Line
14 Gauge Type 304 S/S
S/S H-Frame Legs

Clean Dish Tables • Straight Design

Length	Model No.	Weight		Cube
		(lbs.)	(kg)	
STRAIGHT DESIGN • LEFT TO RIGHT FLOW				
36"	CDT-3-LR	40	18	9
48"	CDT-4-LR	50	23	12
60"	CDT-5-LR	60	27	15
72"	CDT-6-LR	80	36	18
84"	CDT-7-LR	100	45	21
96"	CDT-8-LR	110	50	24

STRAIGHT DESIGN • RIGHT TO LEFT FLOW				
36"	CDT-3-RL	40	18	9
48"	CDT-4-RL	50	23	12
60"	CDT-5-RL	60	27	15
72"	CDT-6-RL	80	36	18
84"	CDT-7-RL	100	45	21
96"	CDT-8-RL	110	50	24

Length	Model No.	Weight		Cube
		(lbs.)	(kg)	
STRAIGHT DESIGN • LEFT TO RIGHT FLOW				
36"	CDT-SL-3-LR	44	20	9
48"	CDT-SL-4-LR	55	25	12
60"	CDT-SL-5-LR	66	30	15
72"	CDT-SL-6-LR	88	40	18
84"	CDT-SL-7-LR	110	50	21
96"	CDT-SL-8-LR	121	55	24

STRAIGHT DESIGN • RIGHT TO LEFT FLOW				
36"	CDT-SL-3-RL	44	20	9
48"	CDT-SL-4-RL	55	25	12
60"	CDT-SL-5-RL	66	30	15
72"	CDT-SL-6-RL	88	40	18
84"	CDT-SL-7-RL	110	50	21
96"	CDT-SL-8-RL	121	55	24

DETAILED SPECIFICATIONS

CLEAN DISH TABLES • STRAIGHT DESIGN

RIGHT TO LEFT FLOW

O.A. SIZE		MODEL NO.
A	W	
36"x30"		CDT-* -3-RL
48"x30"		CDT-* -4-RL
60"x30"		CDT-* -5-RL
72"x30"		CDT-* -6-RL
84"x30"		CDT-* -7-RL
96"x30"		CDT-* -8-RL


*Indicate SL for Spec Line

LEFT TO RIGHT FLOW


O.A. SIZE		MODEL NO.
A	W	
36"x30"		CDT-* -3-LR
48"x30"		CDT-* -4-LR
60"x30"		CDT-* -5-LR
72"x30"		CDT-* -6-LR
84"x30"		CDT-* -7-LR
96"x30"		CDT-* -8-LR

*Indicate SL for Spec Line

NOTE: Tables 84" and longer require four legs.

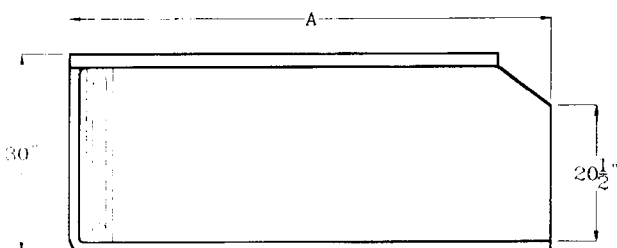




DISH
MACHINE

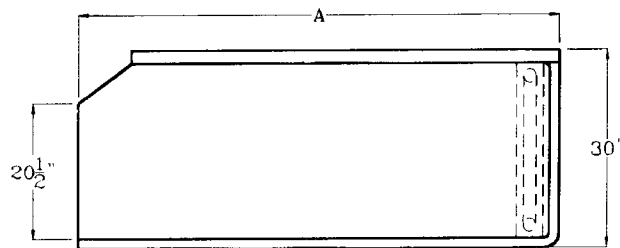

RIGHT TO LEFT OPERATION
(SHOWN ABOVE)

OPERATOR

LEFT TO RIGHT OPERATION
(SHOWN ABOVE)

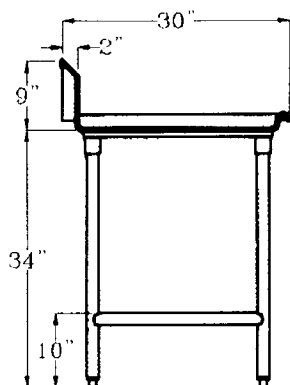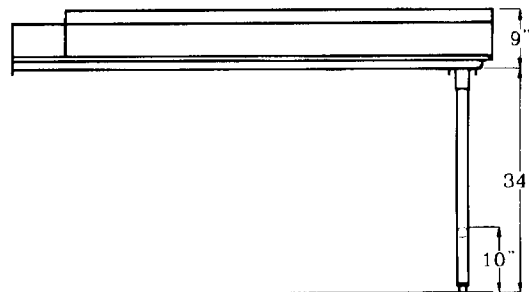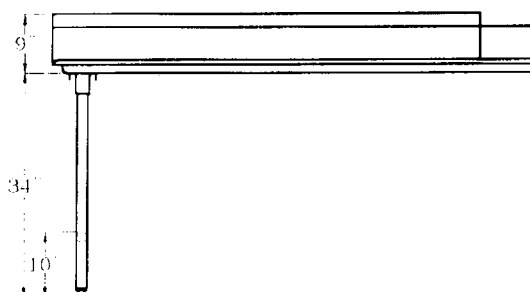

MATERIALS

Standard Series

Top: 16 Gauge Type
304 S/S
Legs: 1 5/8" Diameter
S/S Tubing
Cross-
rails: 1 5/8" Diameter
S/S Tubing

Spec Line

Top: 14 Gauge Type
304 S/S
Legs: 1 5/8" Diameter
S/S Tubing
Cross-
rails: 1 5/8" Diameter
S/S Tubing

Universal Stainless is constantly engaged in a program of improving products and, therefore, reserves the right to change specifications without prior notice.