



# Rosita Bisani

SPECIALTY FOOD SERVICES EQUIPMENT

Rotary Gas-Fired Oven  
Cupola Dome Mosaic - CM  
FGR100 Morello Forni



#### STANDARD FEATURES

- Gas Cupola Mosaic Dome Oven with rotating cooking bedplate chamber.
- Constructed from high refractory premium grade alumina.
- Oven walls average 7" thickness with completely sealed wall enclosures.
- Double gas burner system in stainless steel.
- Internal dome burner and under bedplate gas burner system.
- Thermal insulation made of mineral fibre with high insulating properties; minimum 6" from top to bottom requiring 3" clearance to combustible materials.
- INTELTOUCH-MF10 Touch Screen Electronic Control System.
- Independent intuitive digital safety controls.
- Programmable time, speed, temperature and flame control system.
- Optimized performance and large productivity.
- Emergency Stop push button.
- 220/60/1

#### OPTION

Mosaic Natural Stone Colors

ITEM:

---

PROJECT:

---

DATE:




---

Rotary Gas-Fired Oven  
Cupola Dome Mosaic - CM  
FGR100



**Rosito Bisani**  
SPECIALTY FOOD SERVICES EQUIPMENT

**Rotary Gas-Fired Oven**  
**Cupola Dome Mosaic - CM**  
**FGR100 Morello Forni**

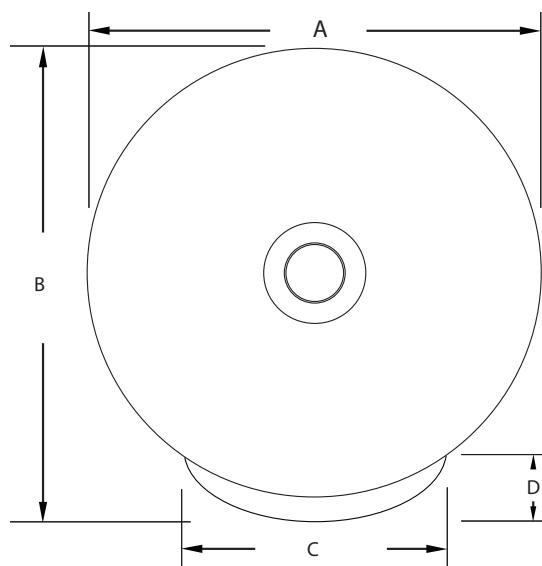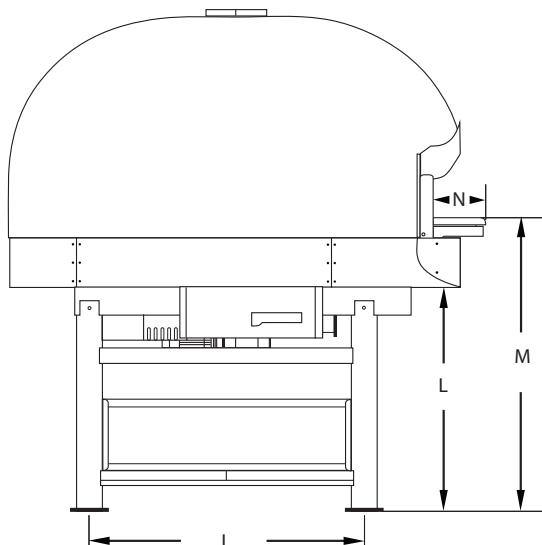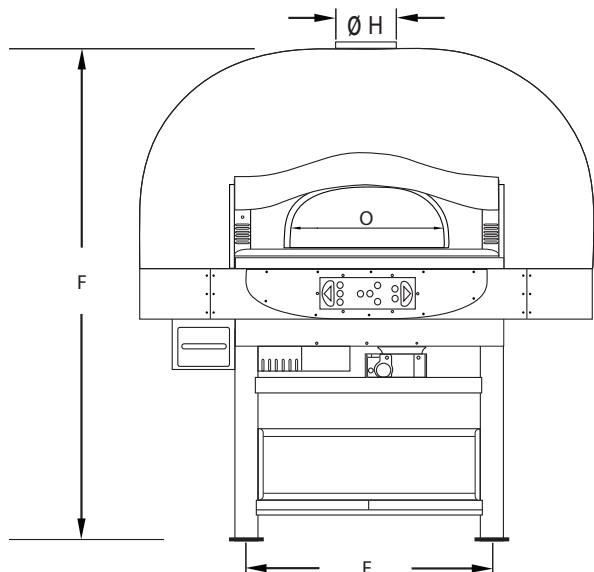

**FLUE CONNECTION**

All ovens are provided with an exhaust flue collar  $\frac{1}{2}$ " or  $2\frac{1}{2}$ " in height and 8" or 10" nominal diameter depending on model. The flue collar ( $\varnothing H$ ) is located on oven top to provide a secure connection to the chimney. The oven flue collar is designed to be connected to chimney listed to UL-103HT. When working on gas only ovens, the oven is suitable for connection to Type B Gas Vent when used with the draft hood. When burning wood, an independent Flue evacuation system is required.

**ELECTRICAL CONNECTION**

Verify the power supply has the same rating as the oven.

**AIR SUPPLY**

These ovens require make-up air to replace combustion air and excess air taken out by the flue. Always check for adequate openings to allow required make-up air flow in. Check table included in operations manual.

| Model/<br>Specifications | Cooking Time  |           |
|--------------------------|---------------|-----------|
|                          | Capacity      | (6) x 11" |
| Power                    | 220/60/1      |           |
| Gas Fitting (inches)     | $\frac{3}{4}$ |           |
| BTU                      | 81,900        |           |
| Weight (lbs.)            | 3,975         |           |

| Model/<br>Dimension<br>(inches) | A  | B  | C    | D  | E  | F  | $\varnothing H$ | I    | L    | M  | N  | O    |
|---------------------------------|----|----|------|----|----|----|-----------------|------|------|----|----|------|
| FGR100 (39)                     | 62 | 66 | 40.5 | 12 | 37 | 78 | 10              | 45.5 | 32.5 | 48 | 10 | 21.5 |



**Rosito Bisani Imports, Inc.**  
940 South La Brea Avenue, Los Angeles CA, 90036  
Tel: 323-937-1888 • Fax: 323-938-0728 • Toll Free: 1-800-848-4444  
E-mail: sales@rosito-bisani.com  
[www.rosito-bisani.com](http://www.rosito-bisani.com)  
530 South Henderson Road, Suite F, King of Prussia PA, 19406  
Tel: 610-265-5950 • Fax: 888-576-8524

