



ASPIRAL 15



Spiral Mixer, 50 Lb. Dough Capacity, 2 Speeds, Programmable Digital Control, Stationary Stainless Steel Bowl, Safety Guard & Dough Hook, Cast Iron Frame with Enamel Coated Steel Finish, 2 HP, 208-240/60/1P/10A, NEMA 6-15P



PROJECT _____

ITEM NO. _____

NOTES _____

MODEL NUMBER: **AEF015SP****FEATURES**

- ☐ Unique Easy to Use Digital Control
 - 2 Speeds (no need to stop mixer to change speed)
 - 99 Minute Mixing Timer
 - 9 Programmable Speed & Time Settings
- ☐ Emergency Stop
- ☐ Stainless Steel 30 Quart Bowl with Rounded Center Post
- ☐ Stainless Steel Dough Hook
- ☐ Integrated Standard Bowl Drain
- ☐ Wire Guard for Bowl Featuring Automatic Motor Cut-Off Switch
- ☐ Thermal Overload Protection for Motor
- ☐ Non-Slipping Belt Driven Motor

CONSTRUCTION

- ☐ Heavy Duty Frame with Lead-Free Enamel Coating
- ☐ S/S Legs to Prevent Rusting
- ☐ Carbon Steel Frame

OPTIONS & ACCESSORIES


- ☐ Stainless Steel Construction [Suffix I]
- ☐ Equipment Stand [AEF015B]
- ☐ Paddle w/Scraper (Installed by Factory) [AEF015P & AEF015S]
- ☐ Touchscreen Controls

CLEARANCES

- ☐ 6" (152mm) On All Sides
- ☐ Top & Bottom Must Remain Unobstructed


WARRANTY

- ☐ One Year Labor & Two Year Parts



Model	Weight	Overall Dimensions			Motor HP	Hub	Dough Capacity (60% AR)
		W	D	H			
AEF015SP	414 (188)	20 ¹¹ / ₁₆ " (525)	29 ¹ / ₈ " (740)	42 ¹⁵ / ₁₆ " (1090)	2	NO	48 lbs (22 kg)

Model	Electrical System					
	Volts	Amps	Phase	Hz	kW	NEMA
AEF015SP	208 240	10	1	50/60	1.5	6-15P

NEMA 6-15P

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

KCL & REVIT DRAWINGS UPON REQUEST

REVISION C | 5/23/2025

Follow Us



Doyon

5600 13th Street, Menominee, MI 49858

906.863.4401 | 800.338.9886 | www.doyon.qc.ca






PROJECT _____

ITEM NO. _____

NOTES _____

MODEL NUMBER: **A E F 0 1 5 S P**

DRAWINGS

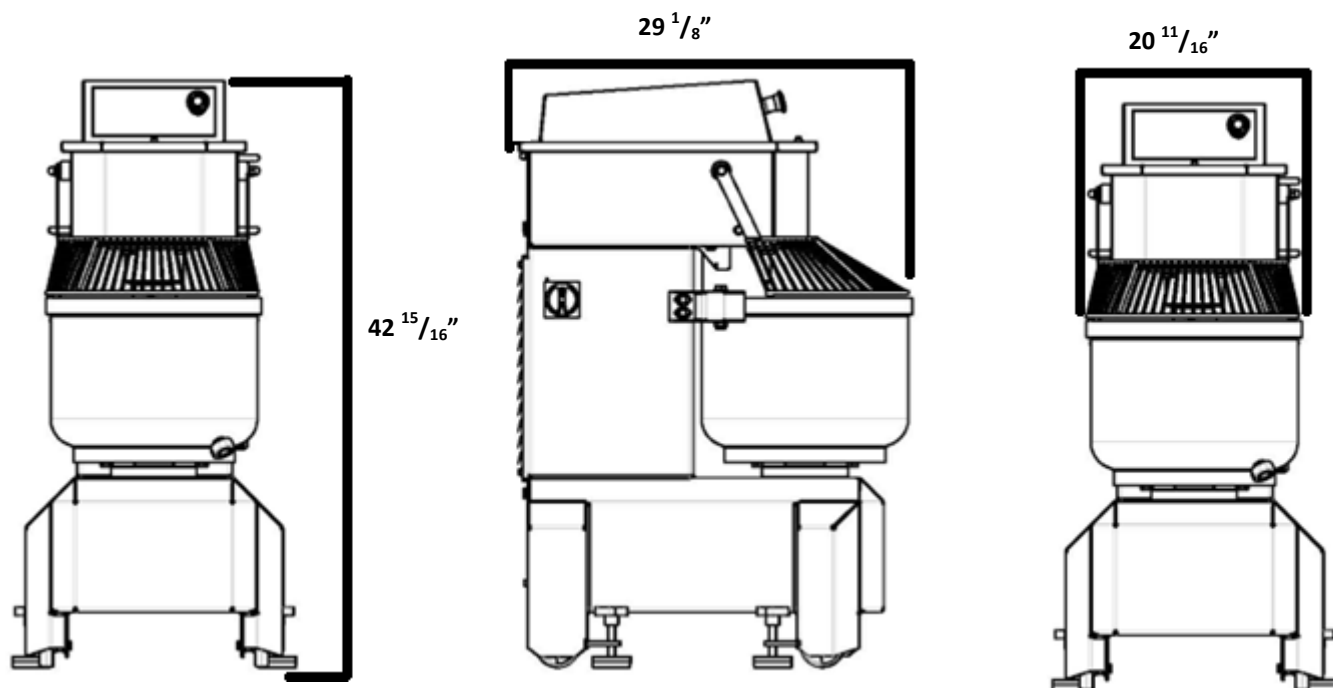

Capacity Chart

Recipe/Product	Pounds	Kilograms
Flour Capacity Minimum	1.32	0.6
Flour Capacity Maximum	26.46	12
50% AR Dough Minimum	3	1
50% AR Dough Maximum	30	14
55% AR Dough Minimum	3	1
55% AR Dough Maximum	35	16
60% AR Dough Minimum	3	1
60% AR Dough Maximum	48	22
65% AR Dough Minimum	3	1
65% AR Dough Maximum	48	22

Calculating AR%

To know the absorption ratio of your recipe use the following formula:

$$\%AR = \text{Water Weight (lbs)} / \text{Flour Weight (lbs)}$$

1 Canadian Gallon of Water = 10lbs (4.54 kg)

1 US Gallon of Water = 8.33lbs (3.77kg)

Use of ice requires a 10% reduction in batch size.
Drop 10% from the above chart for high gluten flour.

Make sure to take into consideration all water content. This should include any extracts, butter/shortening, eggs, etc. into factoring AR%.

For Example: Your using 1 US Gallon of water and 15lbs of flour = 0.55 or 55% AR

That means you will have a finished product of 23.3lbs of dough at 55% AR. Refer to this chart to find the model you will need.

Doyon/NU-VU recommends the following capacity ratings on based AR%. If dough has a lower AR% we recommend decreasing the recipe to adjust for denser dough. Failure to follow said guidelines or recommendations could result in non-warranted service issues with mixer.

Please contact factory to verify if mixer is suitable for your application.

Note - Different Types of flour have different gluten content and are not universal between products.

Note - Eggs, Milk, Extracts, must be added to liquid when calculating AR%

Due to periodic changes in designs, methods, procedures, policies and regulations, the specifications contained in this sheet are subject to change without notice. While Doyon exercises good faith efforts to provide information that is accurate, we are not responsible for errors or omissions in information provided or conclusions reached as a result of using these specifications. By using the information provided, the user assumes all risks in connection with such use.

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

KCL & REVIT DRAWINGS UPON REQUEST

REVISION C | 5/23/2025

Follow Us



Doyon

5600 13th Street, Menominee, MI 49858

906.863.4401 | 800.338.9886 | www.doyon.qc.ca

