



BEVERAGE-AIR®

Project: _____	AIA#
Item: _____	
Location: _____	SIS#
Approved: _____	

BF200RB BLAST CHILLER: BLAST CHILLING, SHOCK FREEZING AND THAWING

BLAST CHILLING/SHOCK FREEZING/THAWING

BF200RB Solid Door Self-Contained Roll-In Blast Chiller

MODEL:
BF200RB-PFO-XL



Note: Shown With Optional Ramp

3 Year Parts/Labor Warranty
5 Year Compressor Warranty

CABINET CONSTRUCTION

- Stainless steel exterior and interior (with rounded interior corners)
- Stainless steel door liner
- Die-formed leak-proof floor
- High density, polyurethane insulation
- Anti-condensation resistance, placed on the door under the gasket
- Hinged door with gasket
- Ergonomic vertical door handle
- Circuit breaker for compressor protection
- 5" High-definition, easy-to-use touch display
- Blast chilling, shock freezing and thawing modes
- Photo identifiable mode settings
- Customized blast chilling, blast freezing and thawing cycles (320 cycles can be memorized)
- USB connection for uploading and downloading data and recipes
- Heated core probe, with 4 measuring points
- Pre-cooling function
- Thick stainless steel internal bumper to avoid damage caused by the cart
- Maximum interior dimensions for carts: 35"W x 40"D x 71"H (not included)
- Ramp dimension: 43.2"W x 31.9"D (ramp not included)

OPTIONS & ACCESSORIES

- Single sensor probe
- Ramp (not included)

REFRIGERATION SYSTEM

- Self-contained refrigeration system uses R404 refrigerant to comply with all environmental concerns
- Copper-aluminum evaporator with anti-corrosion treatment
- High-ventilation evaporator to ensure the highest efficiency of the cooling system
- Evaporator installed on the back with accessible cover and adjustment of the speed of the evaporator fans



Please verify qualifying units by visiting:
www.energystar.gov/cfs

3779 Champion Blvd., Winston-Salem, NC 27105
1-888-845-9800 Fax: 1-336-245-6453
Beverage-Air.com Sales@bevair.com



BEVERAGE-AIR®


MODEL	BF200RB-PFO-XL
EXTERNAL DIMENSIONAL DATA	
Width Overall (in)	43.31"
Depth Overall (in)	64.26"
Height Overall (in)	94.49"
Number of Doors	1
Depth, Door Opening 90° (in)	104.46"
Door Opening (in)	35.43" x 71.65"
PERFORMANCE DATA	
Chilling Capacity In 90 Min	187 lbs
Freezing Capacity In 240 Min	88 lbs
Climate Class	4
Carts (not included)	1 GN2/1
ELECTRICAL DATA	
Cabinet Voltage	208-240/60/3
Total Amperes	23.8
NEMA Plug (8' cord)	15-30P
REFRIGERATION DATA	
Condensing Unit Size, HP	2.8
Refrigerant	R404
Capacity (BTU/Hr) (113°F/-13°F)	10,857
Heat Rejection (W) (14°F/95°F)	9,850
Refrigerant Amount (lbs)	6.4
WEIGHT DATA	
Gross Weight - Crated	1570 lbs
Height - Crated	102"
Width - Crated	50"
Depth - Crated	70"

We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment. Dimensional tolerances +/- 1/4". Metric dimensions (MM).


Self-Contained Blast Chilling, Shock Freezing and Thawing Model: BF200RB-PFO-XL

Model Views


12" Top and 3" rear clearance is required



PLAN VIEW

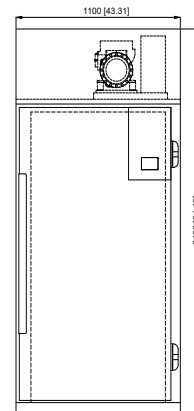

ELEVATION VIEW

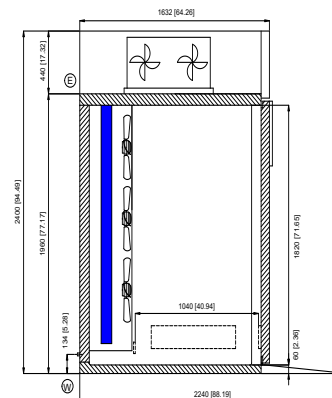

SIDE VIEW



3779 Champion Blvd., Winston-Salem, NC 27105 1-888-845-9800 Fax: 1-336-245-6453 Beverage-Air.com Sales@bevair.com

