

Project	
Item #	
Ouantity	

# AF-75 FRYER

GAS TYPE:







AF-75

## STANDARD FEATURES

- · All stainless steel front and sides
- · Heavy gauge stainless steel tank
- Special alloy metal diffuser located in the burner tube for better heat transfer
- Burners rated at 40,000 BTU/hr.
- · Millivolt control system with 100% safety shut off
- Thermostatic control with 200°F to 400°F range
- 1-1 /4" full port drain valve
- · 6" legs or optional casters
- 18" x 18" frying area. 75 pounds oil capacity
- Two year limited warranty, parts, and labor

### **AVAILABLE OPTIONS**

- · Stainless steel tank cover
- · Four casters front two with locking brakes
- · Stainless steel Splash Guard
- Joiner Strip: Connects two fryers and prevents oil from getting in between the fryers or drain station



# Model Shown AF-75

Shown with optional casters

### **DESCRIPTION**


American Range, 75 pound fryer, model AF-75. All stainless steel front and sides, with heavy gauge stainless steel tank and rated at 160,000 BTU/hr. Standard Millivolt control system with 100% safety shut off and Thermostatic control with a temperature range of 200°F to 400°F. 1-1 /4" full port drain valve for easy cleaning.












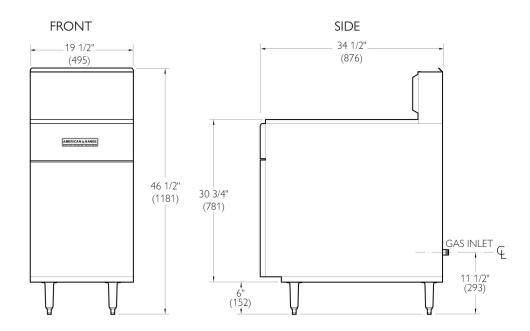

Shipping Weight\*

MODEL	WIDTH (MM)	DEPTH (MM)	HEIGHT (MM)	BURNERS	BTU/hr.	(kW)	LBS	(KG)
AF-75	19 1/2" (495)	34-1/2" (876)	46-1/2" (1181)	4	160,000	(47)	198	(90)

- (A99458) Stainless steel tank cover
- (A99342 left) Stainless steel Splash Guard
- (A99343 right) Stainless steel Splash Guard
- (A99413) Joiner Strip: Connects two fryers and prevents oil from getting in between the fryers or drain station

Specify type of gas and altitude if over 2000 feet.

Please specify gas type when ordering.

MANIFOLD PRESSURE					
NATURAL GAS	PROPANE GAS	MANIFOLD SIZE			
5.0" W.C.	10.0" W.C.	3/4" (19MM)			

\*Shipping weight includes packaging and is approximate.

American Range is a quality manufacturer of commercial cooking equipment. Due to continuing product improvements, these specifications are subject to change without prior notice.

### COMBUSTIBLE WALL CLEARANCES:

For use only on non-combustible floors. Legs or casters are required, or 2" (51) overhang is required when curb mounted. Clearance from non-combustible walls is 0". When unit is placed next to combustible walls, clearances must exceed 12" (305) from sides, and 4" (102) from rear.

Commercial cooking equipment requires an adequate ventilation system. For additional information, refer to the National Fire Protection Association's standard.

NFPA96 "Vapor Removal from Cooking Equipment." (NOTE: For North America only)





