



ROTARY GLASSWASHER
PKBR24 Series



ANSI / NSF #7



JOB	
AREA	
ITEM NO.	
MODEL NO.	

MODEL	DESCRIPTION
PKBR24	Chemical Status Panel on Front

KEY PRODUCT FEATURES AND BENEFITS

- All stainless steel construction with 16-gauge stainless steel wash tank
- Cleans and sanitizes 720 glasses per hour
- Easy to clean and maintain
- Upper and lower wash arms with fan-spray nozzles clean glasses inside and out
- Fill and dump cycle provides clean water for each wash cycle
- Wash tank heater maintains water temperature between cycles
- Pitched, vinyl-coated glass racks help drain excess water off glassware and are removable for more efficient glass handling

Quick Features:

- Metal divider separates the load and wash areas, eliminating the need for curtains
- Divider safety switch stops wash cycle when divider is rotated
- Peristaltic metering pumps with hand-adjusted controls dispense detergent, sanitizer and rinse aid
- Illuminated sight glasses permit visual inspection of chemical flows during the wash cycle

Note:


- *Some US States may require Energy Star ratings for Commercial Dishwashers. The specifier or installer is responsible for knowing their local codes, standards, and regulatory requirements.*

Form No. Z2838
Rev. 03.01.23





ROTARY GLASSWASHER
PKBR24 Series

MODEL NOS.	PKBR24	
DIMENSIONS: EXTERIOR (mm)	Length	24" (610)
	Width	24" (610)
	Height	39-1/4" (1001)/ 40-1/4" (1026)
	Maximum Glass Height (mm)	10" (254)
	Weight Lbs. (kg)	225 (103)
ELECTRICAL RATING	Volts / Hz	120 U.S./230 Metric/1 PH-60 Hz
	Total Amps	5.4
WASH PUMP MOTOR		1/5 HP
WATER CONSUMPTION, GALLONS (LITERS)	Per Rack	1.7 gallons (6.4 liters)
	Per Hour	51 gallons (193 liters)
OPERATING CYCLE	Wash Time, Seconds	60
	Sanitizer Time, Seconds	35
	Dwell Time, Seconds	25
	Total Cycle Time	120
OPERATING CAPACITY	Glasses per Hour	720
	Wash Tank Capacity, Gallons (lt)	1 (3.785)
	Pump Capacity, Gallons per Minute (lt)	24 (90.85)
WATER REQUIREMENTS	Required Minimum Temperature*	120°F (49°C)
	Recommended Temperature**	130°-140°F (54-60°C)
	Water Inlet, Inches (cm)	1/2 NPTM (127)
	Drain Connection, Inches (cm)	1-1/4 (31.75) IPS PVC socket to include an air gap
	Rinse Pressure Set	20 +/- 5psi (1.41 kg/cm ²)
CYCLE TEMPERATURES	Wash	130°-140°F (54-60°C)
	Rinse	130°-140°F (54-60°C)
AVAILABLE OPTION	Second year extended parts and labor warranty (includes one (1) year parts and labor warranty)	

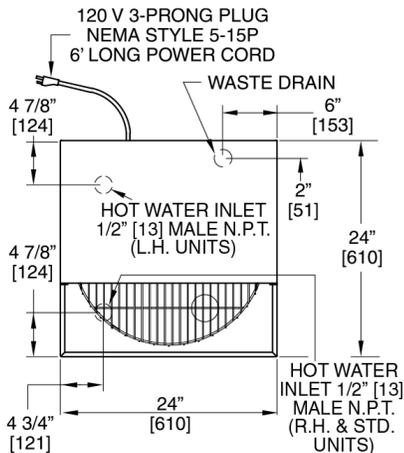

* PARTS INCLUDED IN PLUMBER'S HOOKUP KIT

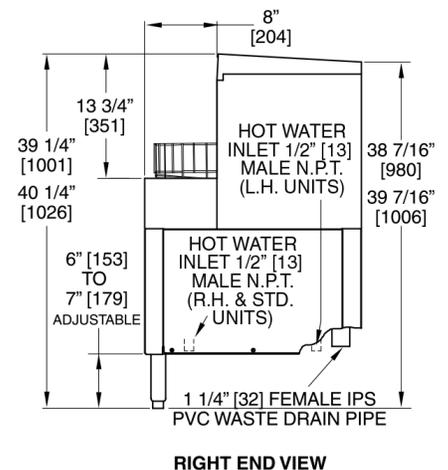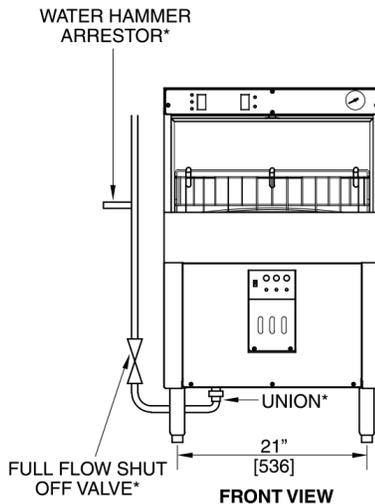

Warning: Electrical and plumbing connections must be made by a qualified service person who complies with all federal, state and local health, electrical, plumbing and safety codes.

Form No. Z2838
Rev. 03.01.23