

STANDARD DROP-IN REFRIGERATED COLD PAN UNITS

Drop-in Cold pan units can be placed in existing countertops and other work areas to house items that need to be kept chilled. Perfect for cold bar items such as bottle drinks or salad bar items.



DIRCP-3 Shown

Item #: _____ Qty #: _____
Model #: _____
Project #: _____

FEATURES:

- High nominal cooling capacity for consistent product temperature control
- Aluminum encased copper tube evaporator panels improve heat transfer by increasing contact area
- This increases operating efficiency and reduces power consumption
- Expansion valve for efficient operation at various temperature conditions
- Refrigerant filter drier to insure cleanliness of sealed refrigeration circuit
- Sight glass to insure a properly charged refrigeration system
- Liquid receiver for improved refrigerant charge control
- Low running current suitable for any 115 volt circuit
- Precision electronic thermostat for exact temperature control
- Includes adapter bars for use with standard 12" x 20" pans

MATERIAL: IMPORTANT NOTE:

The refrigeration compressor requires a free flowing supply of air for proper operation. For units installed in closed cabinets a minimum unobstructed air intake of 200 sq in and a separate exhaust of 200 sq in must be supplied by the installer or cabinet maker. Failure to provide adequate air intake and exhaust will void any warranty coverage on the unit.

TOP: 18 gauge, #304 stainless steel, with extruded black polyethylene thermal breaker marine edge

INSULATION: The pan is fully insulated and foamed in place with a 1-1/4" thickness on all sides and 2" thick on the bottom and enclosed with a 22 gauge galvanized steel outer jacket. This offers a lower heat gain into product

LINER: Constructed of 18 gauge, #304 stainless steel, with 3" recessed top, one piece construction, all welded, ground and polished to a uniform finish. All corners are coved with a 1/4" radius. Liner is pitched towards a 1" I.P.S. drain

REFRIGERATION SYSTEM: The compressor is housed in a 16 gauge galvanized under structure, fabricated from formed angles and bolted to the galvanized jacket. The fully self contained condensing unit is provided with a hermetically sealed compressor with a digital, programmable thermostat. The system is fully charged with environmentally friendly R290 refrigerant

ELECTRICAL: Unit will be wired for 15 amps, 120V, single phase operation with an on/off thermostat switch.
8 ft. cord with NEMA 5-15P.

1-3 Well Units: 115v, 8 Amps, 60 Hz, 1/5 HP

4-6 Well Units: 115v, 8 Amps, 60 Hz, 1/3 HP

Model #	Length (L)	Inside Length (B)	Cut-Out Size (Unit)	# of Wells	Refrigerant	Weight (lbs)	Cubic Feet
DIRCP-1	20.00"	18.32"	25-1/2" x 18-5/8"	1	R290	163 lbs.	14
DIRCP-2	33.50"	31.785"	25-1/2" x 32-1/8"	2	R290	205 lbs.	22
DIRCP-3	47.00"	45.29"	25-1/2" x 45-5/8"	3	R290	257 lbs.	30
DIRCP-4	60.50"	58.78"	25-1/2" x 59-1/8"	4	R290	325 lbs.	38
DIRCP-5	74.00"	72.28"	25-1/2" x 72-5/8"	5	R290	365 lbs.	46
DIRCP-6	87.50"	85.78"	25-1/2" x 86-1/8"	6	R290	398 lbs.	54

NOTE: Units are not designed to cool foods originally warm. Food should already be chilled to maintain the proper temperatures

SU-P-234 - 6' Cord with
NEMA 5-15 plug Included




WARNING: Refrigerated Equipment on this page may expose you to chemicals, including Ethanes, that are known to the State of California to cause cancer or birth defects or other reproductive harm. For more Info., visit www.p65warnings.ca.gov.

DIMENSIONS and SPECIFICATIONS

TOL ± .125"

ALL DIMENSIONS ARE TYPICAL

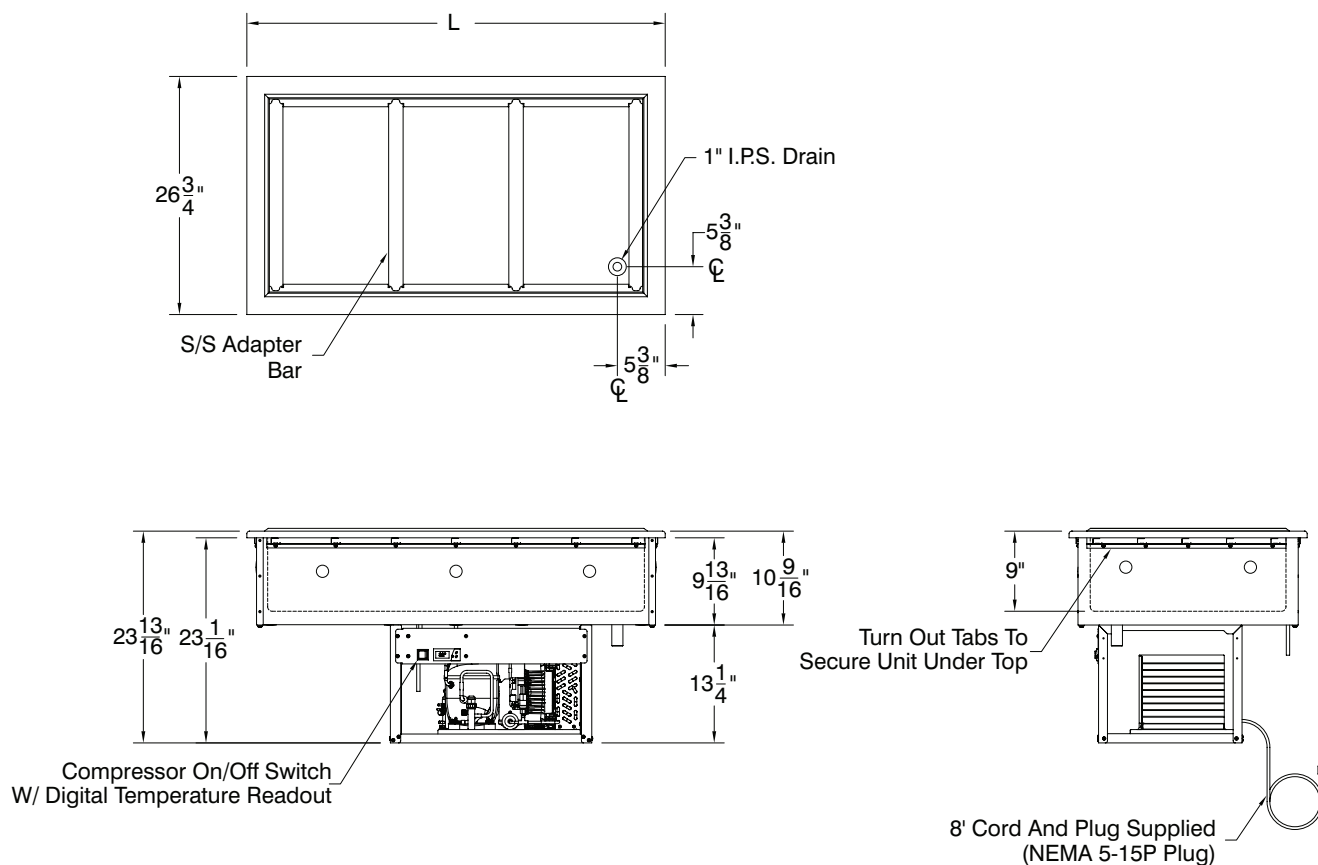

Replacement Adapter Rails & Bars

(A complete set is included with the DIRCP unit when new)

DIRCP SERIES		
Model #	Fits Model:	Description
SU-P-501	DIRCP-1	Two Left To Right Rails & Two Front-To-Back Supports. Includes Mounting Screws.
SU-P-502	DIRCP-2	Two Left To Right Rails & Three Front-To-Back Supports. Includes Mounting Screws.
SU-P-503	DIRCP-3	Two Left To Right Rails & Four Front-To-Back Supports. Includes Mounting Screws.
SU-P-504	DIRCP-4	Two Left To Right Rails & Five Front-To-Back Supports. Includes Mounting Screws.
SU-P-505	DIRCP-5	Two Left To Right Rails & Six Front-To-Back Supports. Includes Mounting Screws.
SU-P-506	DIRCP-6	Two Left To Right Rails & Seven Front-To-Back Supports. Includes Mounting Screws.



Left To Right Rails & Front To Back Supports Shown Above



Horizontal Adapter Bars
For Small Pan Sizes

12" x 1"

Model # SU-45A

Works With Required Rail Kits
(See Grid On Left)



REF-V

325 Wireless Boulevard, Hauppauge, NY 11788

ADVANCE TABCO is constantly engaged in a program of improving our products. Therefore, we reserve the right to change specifications without prior notice.

© ADVANCE TABCO, JJUNE 2025