



PERLICK®



MODEL NUMBERS - SDBR48, SDBR96

REMOTE PASS-THRU BACK BAR REFRIGERATOR



SDBR48 shown



SDBR48 shown

JOB	
AREA	
ITEM NO.	
MODEL NO.	

MODELS
SDBR48
SDBR96

KEY PRODUCT FEATURES AND BENEFITS

- Remote back bar refrigerators allow customers to mount the compressor in an alternate location, ideal for remote servicing and noise isolation
- Self-closing sliding glass door keep narrow profile in tight bar environment
- All stainless steel interior with stainless steel or black top for long life durability and easy to clean hygienic storage
- Hygienic storage
- 2" Foamed-in-place insulation provides energy savings using Ecomate™, a blowing agent that has zero-ozone depletion and zero global warming potential
- NSF/ANSI Standard 7 Listed for open food, beverage, and garnish storage

Additional Features:

- Choose between all stainless exterior or all black option featuring Cerakote finished black handles and door locks.
- Optional condensing units available
- Choose between 6000K white LED lighting or cool blue display lighting
- 1 Year Parts and Labor Warranty

OPTIONS

MODEL NOS.	DESCRIPTION
SDBR48	4-Door Model
SDBR96	6-Door Model

Form No. SDBR.1
Rev. 04.10.25



MODEL NUMBERS – SDBR48, SDBR96

REMOTE PASS-THRU BACK BAR REFRIGERATOR

MODEL NUMBERS		SDBR48	SDBR96
NUMBER OF DOORS		2	4
EXTERIOR CABINET DIMENSIONS	Length - in. (mm)	48 (1219)	96 (2438)
	Depth - in. (mm)	24¾ (629)	24¾ (629)
	Height - in. (mm)	34¾ (878)	34¾ (878)
INTERIOR CABINET DIMENSIONS	Length - in. (mm)	44 (1118)	92 (2337)
	Depth - in. (mm)	18¾ (476)	18¾ (476)
	Height - in. (mm)	28½ (724)	28½ (724)
INTERNAL VOLUME Net. Cu. Ft. (Litres)		15.3 (433)	32.6 (923)
PRODUCT CAPACITY	Case Packed - 12 Oz. Bottle/Can	267/465	617/1025
	Staggered - 12 Oz. Bottle/Can	288/488	667/1102
SHIPPING WEIGHT Lbs. (kg.)		264 (120)	447 (203)
ELECTRICAL SPECIFICATIONS	Electrical Supply	120 VAC/60 Hz/1 Ph	120 VAC/60 Hz/1 Ph
	Running Load Amps	1.6	2.5
	Electrical Connection	Hard wired	Hard wired
	Defrost Initiation	Automatic	Automatic
	Defrost Type	Off cycle	Off cycle
	Lighting Type	LED	LED
REFRIGERATION SPECIFICATIONS	Horsepower	1/4	1/3
	Expansion Device	TXV	TXV
	Evaporator Capacity - Remotes	1900 Btu/Hr @ 20° F Evaporator	2300 Btu/Hr @ 20° F Evaporator
	Remote Refrigerant Options	R134a & R22 & R404a	R134a & R22 & R404a
PLUMBING	Evaporator Condensate	Field plumbed	Field plumbed

- Remote units are made to order and non-returnable


**WARNING: California Prop 65 Notice**

These products may expose you to chemicals including Chromium, which are known to the state of California to cause cancer and birth defects or other reproductive harm. For more information on whether a product in this list contains these chemicals, please refer to the specific product page at perlick.com. Or to find out more about Prop 65, go to P65Warnings.ca.gov.

Form No. SDBR.1
Rev. 04.10.25



REMOTE PASS-THRU BACK BAR REFRIGERATOR

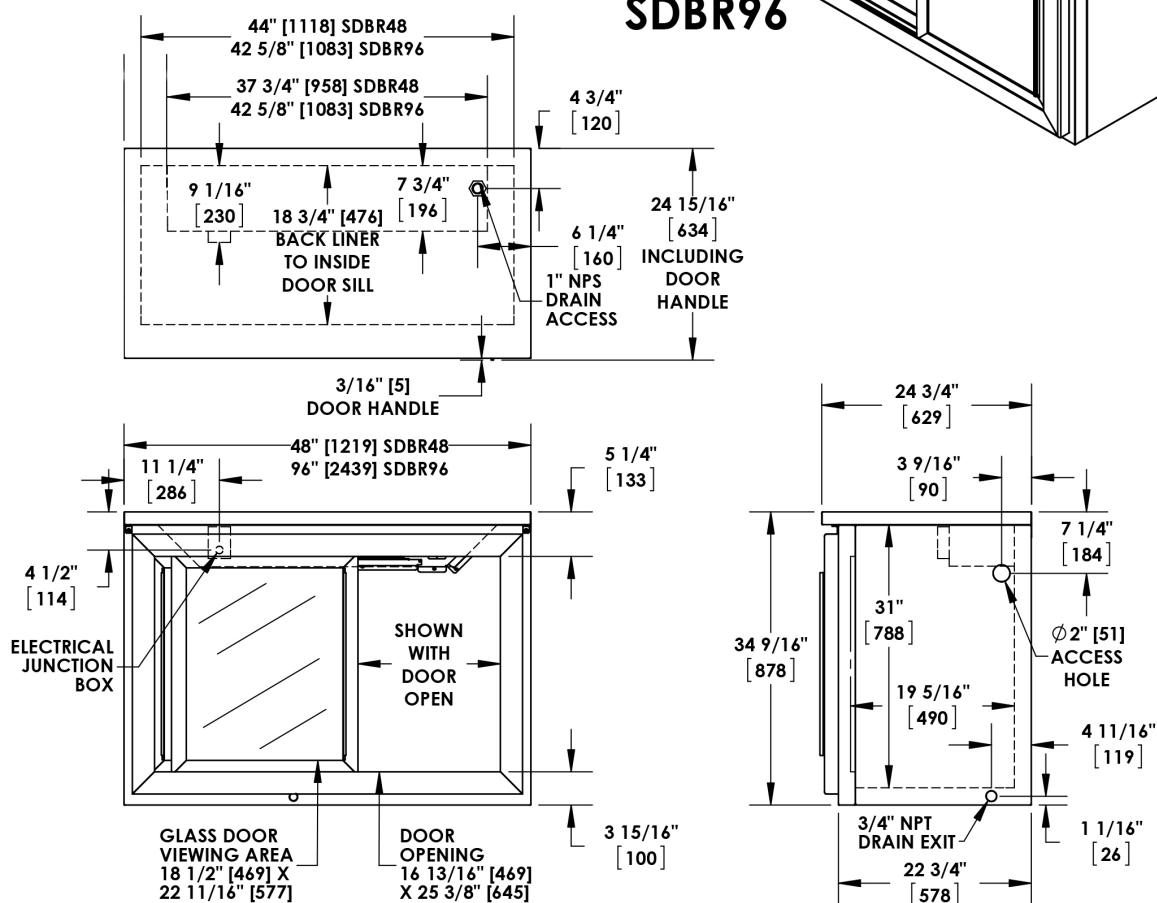

These products may expose you to chemicals including Chromium, which are known to the state of California to cause cancer and birth defects or other reproductive harm. For more information on whether a product in this list contains these chemicals, please refer to the specific product page at [perlick.com](https://www.perlick.com). Or to find out more about Prop 65, go to [P65Warnings.ca.gov](https://www.P65Warnings.ca.gov).

Form No. SDBR.1
Rev. 04.10.25