



Item: \_\_\_\_\_  
Quantity: \_\_\_\_\_  
Project: \_\_\_\_\_

## Electric Series

Models: ☐ RRE-4    ☐ RRE-2GT12    ☐ RRE-GT24



RRE-24

Voltage: ☐ 208V    ☐ 240V  
Phase: ☐ 1 Phase    ☐ 3 Phase

### Standard Features

- Stainless steel front, sides, control panel and kick plate including backguard and high shelf
- Stainless steel full width drip tray
- Oven with 4 KW heating element which is completely covered to protect against damage
- Oven thermostat controls, 200°-500°F
- Five position heavy gauge chrome rack guides
- One chrome rack per oven
- Five surface porcelain oven interior
- 9" solid hot plate elements, 2KW each
- GT Series- 3/4 thick polished steel griddle plate
- GT Series - standard with thermostat every 12"
- "Always Operational" with three internal circuit breakers to help prevent the unit from never being completely down

### Options and Accessories


- ☐ 6" high S/S stub back in lieu of high shelf
- ☐ 1" thick griddle plate
- ☐ Griddle on right (Left hand side standard)
- ☐ Chrome griddle plate
- ☐ Grooved griddle (specify width: \_\_\_\_\_")
- ☐ 9" deep S/S front landing ledge, with or without sauce pan cutouts
- ☐ Additional oven racks
- ☐ Open storage cabinet base - add suffix "-XB"
- ☐ Cabinet doors
- ☐ Intermediate shelf
- ☐ 5" swivel casters (set of four - 2 locking)

**LIMITED WARRANTY, TWO YEAR PARTS AND ONE YEAR LABOR**



**24" Electric Restaurant Range**

# 24" Electric Restaurant Range

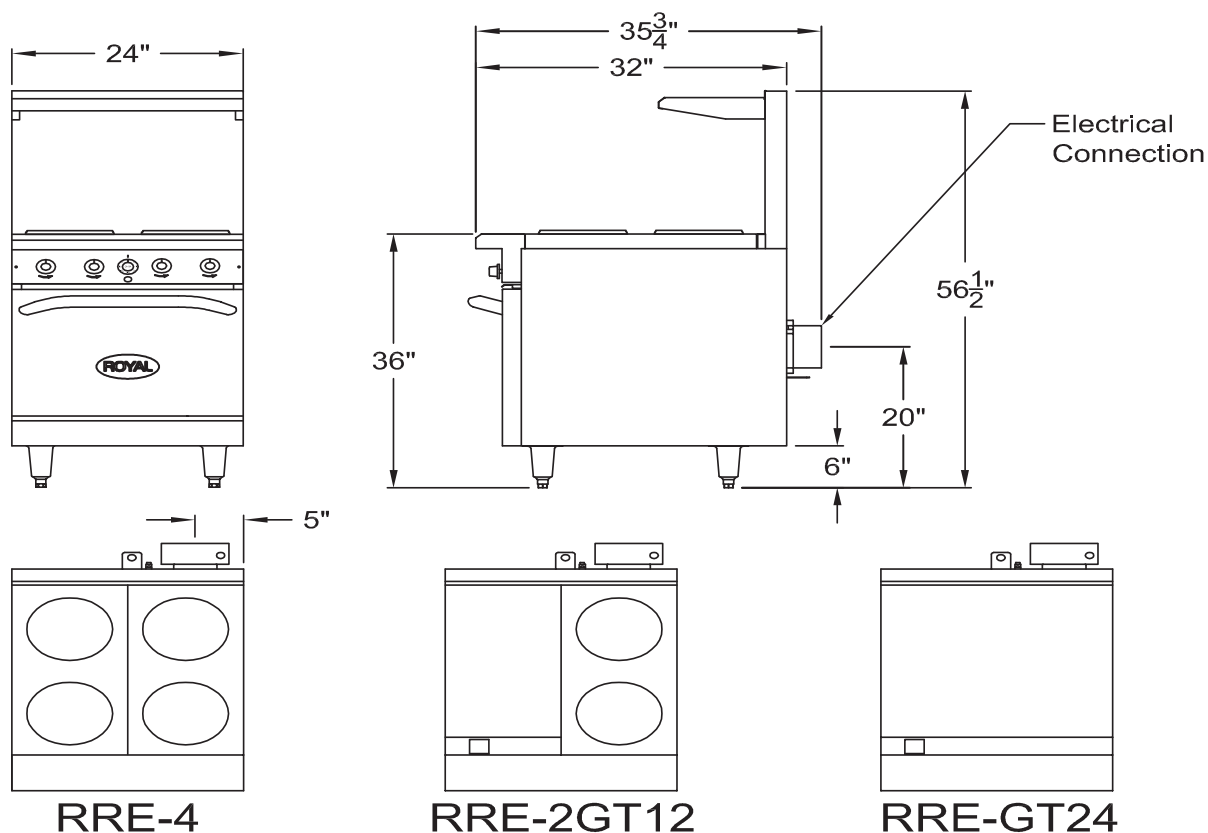

| Model     | Total KW | Voltage | MAX AMPS |         | Ship Wt. |
|-----------|----------|---------|----------|---------|----------|
|           |          |         | 1 Phase  | 3 Phase |          |
| RRE-4     | 12       | 208     | 58       | 34      | 400      |
|           |          | 240     | 50       | 29      |          |
| RRE-2GT12 | 11.4     | 208     | 55       | 32      | 420      |
|           |          | 240     | 48       | 28      |          |
| RRE-GT24  | 10.8     | 208     | 52       | 30      | 440      |
|           |          | 240     | 45       | 26      |          |

**To be installed only in noncombustible surroundings. See installation instructions.**

Due to continuing product development to ensure best possible performance, these specifications are subject to change without prior notification.

**Royal Range of California, Inc.**  
**3245 Corridor Dr. • Eastvale, CA 91752 • (800) 769-2414 • (951) 360-1600**  
**Fax: (951) 360-7500 • [www.royalranges.com](http://www.royalranges.com) • [sales@royalranges.com](mailto:sales@royalranges.com)**