



Outperform every day.™

**Project:**  
**Item Number:**  
**Quantity:**

Short-Side Modular Hot Drop-ins with Marine Grade Wells

The Vollrath Company, L.L.C.

## SHORT-SIDE MODULAR HOT DROP-INS WITH MARINE GRADE WELLS



### DESCRIPTION

Vollrath's Short-Side Modular Hot Drop-ins with Marine Grade Wells offer enhanced corrosion resistance. The rotated wells turn full-size pans sideways for a more narrow presentation. They are designed for top-mount installation and do not require hard-wiring.

### SHORT DESCRIPTION

Rotated well hot-drop-ins, full-size wells are marine-grade stainless steel, standard or manifold drain, insulated on all non-exposed sides, cord with plug, stainless steel remote control panel, mounting clips.

**Note:** Drop-in meets NSF4 performance standards only when using moist heat. Operation with water is required for even heating of the food product.

**Note:** Orders for drop-ins cannot be canceled or returned.

### WARRANTY

All models shown come with Vollrath's two-year warranty against defects in materials and workmanship. For full warranty details, please refer to [www.Vollrath.com](http://www.Vollrath.com).

### Agency Listings



Due to continued product improvement, please consult [www.vollrath.com](http://www.vollrath.com) for current product specifications.

Item Numbers			Description	
<b>1000 Watts Per Well</b>				
Standard	Manifold	Manifold w/ Auto-Fill	Control	Voltage
<b>Two Well</b>				
36646HD	3664620HD	3664630HD	Thermostatic	208-240
36647HD	3664720HD	3664730HD	Infinite	
<b>Three Well</b>				
36648HD	3664820HD	3664830HD	Thermostatic	208-240
36649HD	3664920HD	3664930HD	Infinite	
<b>Four Well</b>				
36650HD	3665020HD	3665030HD	Thermostatic	208-240
36651HD	3665120HD	3665130HD	Infinite	
<b>625 Watts Per Well</b>				
<b>Two Well</b>				
36640HD	3664020HD	3664030HD	Thermostatic	120
36641HD	3664120HD	3664130HD	Infinite	
<b>Three Well</b>				
36642HD	3664220HD	3664230HD	Thermostatic	120
36643HD	3664320HD	3664330HD	Infinite	
<b>Four Well</b>				
36644HD	3664420HD	3664430HD	Thermostatic	120
36645HD	3664520HD	3664530HD	Infinite	

### FEATURES

- Drawn wells are marine grade stainless steel (SAE Type-316).
- Removable panel at the bottom of each well for service access
- Include gasket for under drip edge
- Standard drain is ½" (1.3 cm) with individual well ball valves
- Manifold drain is 1" (2.5 cm) copper tubing with master manifold shut off
- Insulated on all sides, including between each well
- Includes 6' (1.8 m) cord with plug. Does not require hard-wiring
- Stainless steel control panel with individual controls and power indicator light for each well
- Control panel has 4' (121.9 cm) tethered connection for flexible mounting locations
- Includes standard mounting clips for use on counters up to 3" (7.6 cm) thick for easy installation
- Accepts full-size and fractional pans up to 6" (15.2 cm) deep
- Adapter bars are recommended when using fractional pans

### ACCESSORIES

- Sheet pan adapter available. Item No. 19186.

### CLEARANCE AND ENVIRONMENT REQUIREMENTS

- Zero-clearance installation
- Indoor use only. Room temperature and HVAC can effect performance temperatures

Approvals	Date




Outperform every day.™  
[www.vollrath.com](http://www.vollrath.com)

The Vollrath Company, L.L.C.  
1236 North 18th Street  
Sheboygan, WI 53081-3201 U.S.A.  
Customer Service: 800.628.0830  
Canada Customer Service: 800.695.8560  
Main Fax: 800.752.5620 or 920.459.6573

Technical Services: 800.628.0832  
Technical Services Fax: 920.459.5462

# SHORT-SIDE MODULAR HOT DROP-INS WITH MARINE GRADE WELLS


## DIMENSIONS (Shown in inches (cm))

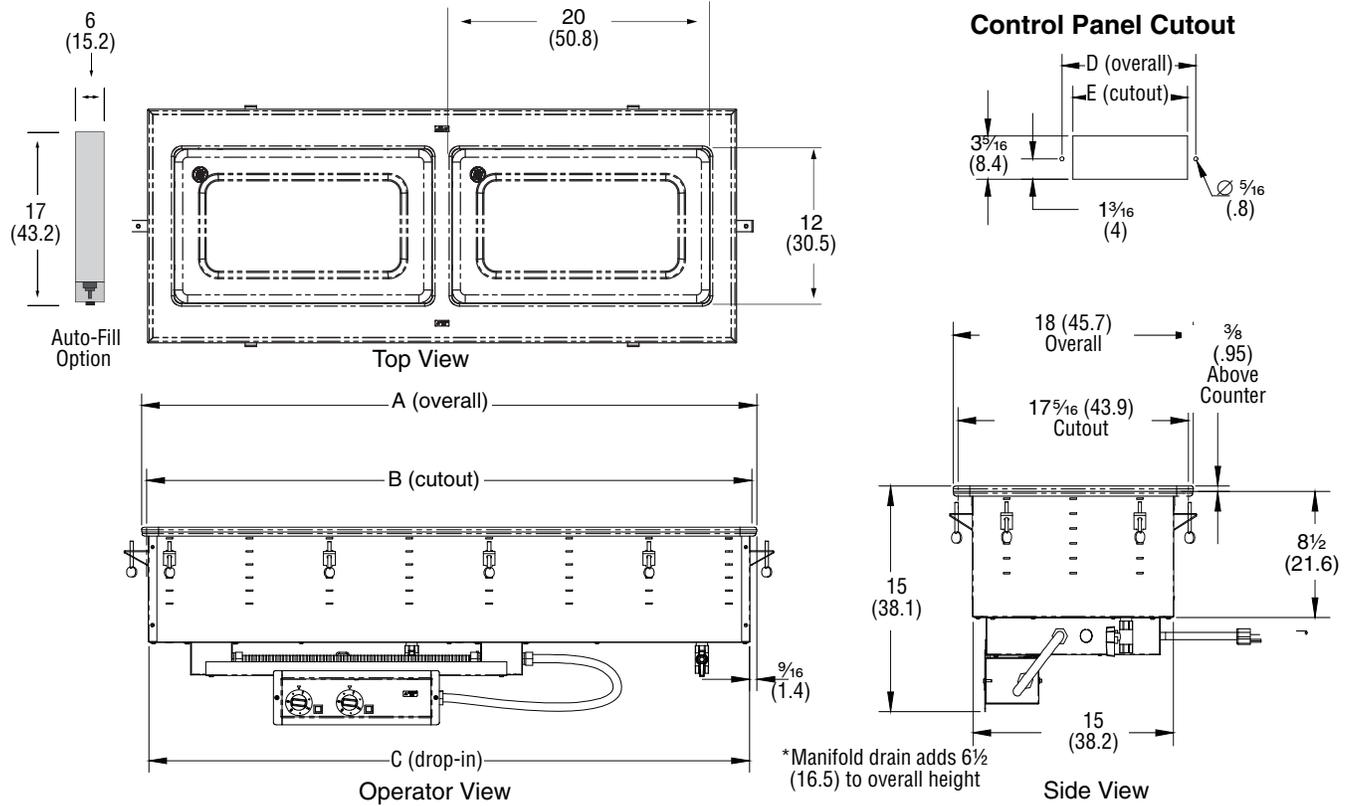

## SPECIFICATIONS

Item Numbers			Control	Dimensions					Electrical		
Standard	Manifold	Manifold w/ Auto-Fill		Drop-in		Control Box		Voltage	Amps	Plug	
			(A) Overall	(B) Cutout	(C) Drop-in	(D) Overall	(E) Cutout				
<b>1000 Watts Per Well</b>											
<b>Two Well</b>											
36646HD	3664620HD	3664630HD	Thermostatic	45 7/16 (114.6)	44 11/16 (113.5)	44 3/8 (112.7)	11 3/4 (29.9)	11 1/4 (28.6)	208 - 240	7.2 - 8.3	NEMA 6-15P
36647HD	3664720HD	3664730HD	Infinite								
<b>Three Well</b>											
36648HD	3664820HD	3664830HD	Thermostatic	66 7/8 (169.8)	66 1/8 (167.9)	65 3/4 (167.1)	15 1/2 (39.4)	15 (38.1)	208 - 240	10.8 - 12.5	NEMA 6-20P
36649HD	3664920HD	3664930HD	Infinite								
<b>Four Well</b>											
36650HD	3665020HD	3665030HD	Thermostatic	88 9/16 (225)	87 1/2 (222.3)	87 3/16 (221.5)	19 1/4 (48.9)	18 13/16 (47.6)	208 - 240	14.4 - 16.7	NEMA 6-30P
36651HD	3665120HD	3665130HD	Infinite								
<b>625 Watts Per Well</b>											
<b>Two Well</b>											
36640HD	3664020HD	3664030HD	Thermostatic	45 7/16 (114.6)	44 11/16 (113.5)	44 3/8 (112.7)	11 3/4 (29.9)	11 1/4 (28.6)	120	10.4	NEMA 5-15P
36641HD	3664120HD	3664130HD	Infinite								
<b>Three Well</b>											
36642HD	3664220HD	3664230HD	Thermostatic	66 7/8 (169.8)	66 1/8 (167.9)	65 3/4 (167.1)	15 1/2 (39.4)	15 (38.1)	120	15.6	NEMA 5-20P
36643HD	3664320HD	3664330HD	Infinite								
<b>Four Well</b>											
36644HD	3664420HD	3664430HD	Thermostatic	88 9/16 (225)	87 1/2 (222.3)	87 3/16 (221.5)	19 1/4 (48.9)	18 13/16 (47.6)	120	20.8	NEMA 5-30P
36645HD	3664520HD	3664530HD	Infinite								

### Straight Blade Receptacles

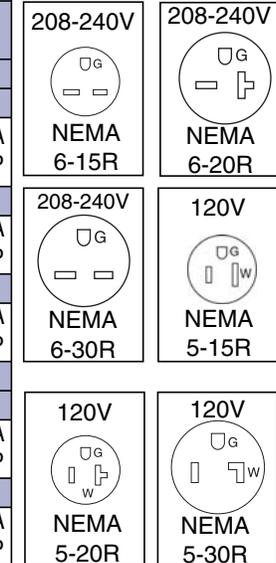

**NOTICE:** Do NOT modify the cord or plug on the drop-in. Modifying any component may damage the drop-in or cause injury, and will void the warranty.

**Note:** Opening cutout must have a 7/8" (2.2 cm) corner radius.



Outperform every day.™

[www.vollrath.com](http://www.vollrath.com)

The Vollrath Company, L.L.C.  
 1236 North 18th Street  
 Sheboygan, WI 53081-3201 U.S.A.  
 Customer Service: 800.628.0830  
 Canada Customer Service: 800.695.8560  
 Main Fax: 800.752.5620 or 920.459.6573

Technical Services: 800.628.0832  
 Technical Services Fax: 920.459.5462