

# Fusion

GP Combination Prep Case

Structural Concepts®

DELIVERING FRESH. ALWAYS.™

- **GP441RRLB** 51"L x 52-1/4"D x 55-3/8"H
- **GP541RRLB** 62-7/8"L x 52-1/4"D x 55-3/8"H
- **GP641RRLB** 75-3/8"L x 52-1/4"D x 55-3/8"H
- **GP841RRLB** 99-3/4"L x 52-1/4"D x 55-3/8"H
- **GP1041RRLB** 123-1/4"L x 52-1/4"D x 55-3/8"H

## Included

- Remote DX refrigeration
- 12" & 16" Solid shelving
- LED top & shelf lights
- One year parts & labor warranty
- Refrigerated rear storage
- Sanalite® cutting board
- Stainless steel rear exterior
- Warmest average product temperature of 40°F or less



GP641RRLB

| Specify                        | Standard Features                          | Additional Options                                                                                                                |
|--------------------------------|--------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|
| <b>EXTERIOR COLOR</b>          | • Laminate (stock colors)                  | • Laminate (non-stock colors)<br>• Powder coated (stock/non-stock colors)<br>• Powder coated Silversan Black<br>• Stainless steel |
| <b>INTERIOR COLOR</b>          | • Powder coated Silversan Black            | • Stainless steel                                                                                                                 |
| <b>LOWER FRONT PANEL COLOR</b> | • Powder coated Silversan Black            | • Powder coated (stock/non-stock colors)<br>• Stainless steel                                                                     |
| <b>BASE SUPPORT</b>            | • Rail system for shims (remote)           |                                                                                                                                   |
| <b>BUMPER FRONT</b>            | • 1" Boston bumper (specify color)         | • 1" Stainless steel plate rail bumper                                                                                            |
| <b>END PANEL PROFILE</b>       | • Curved                                   | • Flat angled                                                                                                                     |
| <b>END PANELS</b>              | • Full w/stainless steel mirror interior   | • None (specify per line-up)                                                                                                      |
| <b>CONDIMENT PANS</b>          | • None                                     | • 1/6 size stainless steel pans w/ lids                                                                                           |
| <b>PRICE TAG MOLDING</b>       | • None                                     | • 1" Price tag molding (black or silver)<br>• Universal price tag molding (clear w/ open top)                                     |
| <b>SNEEZE GUARD</b>            | • Clear glass w/ stainless steel ADM posts | • Frameless clear glass                                                                                                           |
| <b>LIGHTS</b>                  | • LED 3500K w/ frosted lens                | • LED 4000K w/ frosted lens                                                                                                       |
| <b>NOSE LIGHTS</b>             | • None                                     | • LED nose light                                                                                                                  |
| <b>ELECTRICAL CONNECTION</b>   | • Electrical leads (remote)                |                                                                                                                                   |
| <b>REFRIGERATION</b>           | <sup>1</sup> • Remote DX refrigeration     | <sup>1</sup> • Remote w/thermostat, solenoid & TXV                                                                                |
| <b>SENSOR</b>                  | • None                                     | • CPC discharge air sensor (remote)                                                                                               |
| <b>ACCESSORIES</b>             |                                            | • Drain strainer<br>• Night curtain, retractable, non-locking<br>• Removable wire security cover, locking                         |

**Std Notes:** 1 - Read important notes for remote options

**Option Notes:** 1 - Read important notes for remote options

# Fusion

GP Combination Prep Case




Structural Concepts®

DELIVERING FRESH. ALWAYS.™

**Intended Environment:** Type I - Designed to operate in ambient conditions of 75°F with 55% relative humidity unless noted otherwise in system information below.

| Zone | Intended Product To Be Displayed            | Warmest Avg Prod Temp ° F |
|------|---------------------------------------------|---------------------------|
| 1    | Packaged / unpackaged refrigerated products | 40                        |

## PLAN VIEW

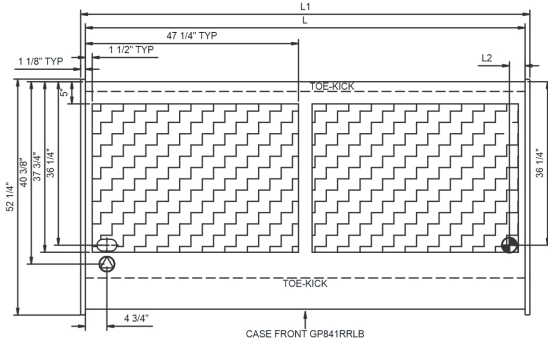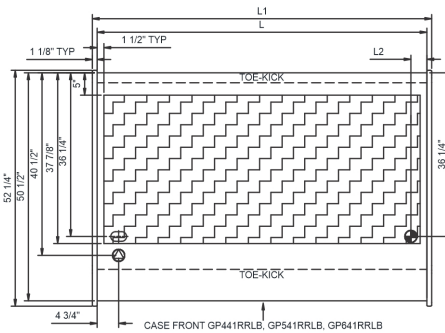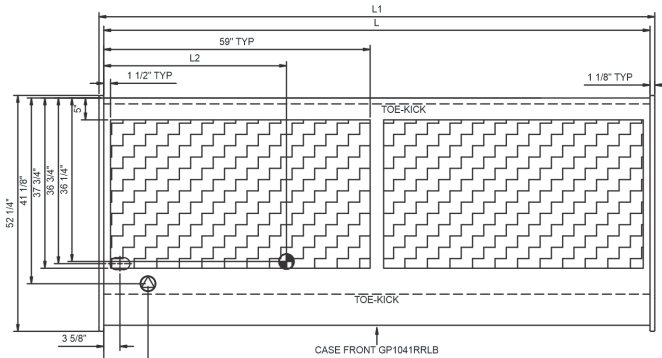



NOTE: ALL DIMENSIONS APPROXIMATE

- ELECTRICAL JUNCTION BOX (SUPPLIED WITH 6\"/>
- LOCATION OF DRAIN TUBE FOR REMOTE REF. ONLY (SUPPLIED WITH 3/4\"/>

- REFRIGERATION LINE CONNECTION.
- REMOTE FLOOR SINK & UTILITIES ACCESS AREA.

- SELF-CONTAINED CASE SERVICE ACCESS AREA.
- DRY CASE SERVICE ACCESS AREA.

## SIDE VIEW

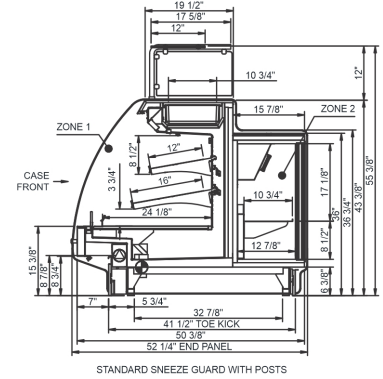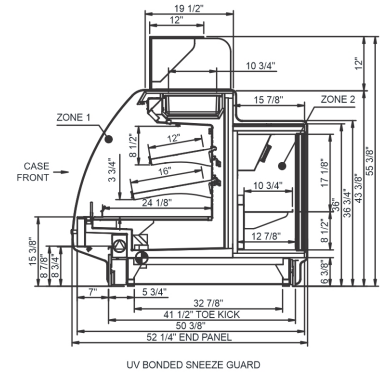

| Model Technical Specifications |        |        |       |                         |            |         |     |      |          |       |       |                |       |                 |                 |        |
|--------------------------------|--------|--------|-------|-------------------------|------------|---------|-----|------|----------|-------|-------|----------------|-------|-----------------|-----------------|--------|
| Model                          | L"     | L1"    | L2"   | System Circuit Volts    |            |         | Phs | Freq | Amps *** | Watts | Wires | NEMA Plug      | SST   | Conv. Rack BTUH | Para. Rack BTUH | Est Wt |
| GP441RRLB                      | 48.75  | 51.00  | 3.50  | Remote (GLYCOL 35%)     | Circuit #1 | 110-120 | 1   | 60   | 3.27     | 266   | 2+G   | Leads Multiple | 20.00 | 5184            | 4800            | 700    |
|                                |        |        |       | Remote (R404A)          | Circuit #1 | 110-120 | 1   | 60   | 3.27     | 266   | 2+G   | Leads Multiple | 20.00 | 5184            | 4800            |        |
| GP541RRLB                      | 60.63  | 62.88  | 3.50  | Remote (DX)             | Circuit #1 | 110-120 | 1   | 60   | 5.27     | 308   | 2+G   | Leads Multiple | 20.00 | 6091            | 5640            | 1,000  |
|                                |        |        |       | Remote (GLYCOL 35%)     | Circuit #1 | 110-120 | 1   | 60   | 4.47     | 303   | 2+G   | Leads Single   | 20.00 | 6091            | 5640            |        |
| GP641RRLB                      | 73.13  | 75.38  | 3.50  | Remote (DX)             | Circuit #1 | 110-120 | 1   | 60   | 4.06     | 212   | 2+G   | Leads Multiple | 20.00 | 7603            | 7040            | 1,375  |
|                                |        |        |       | Remote (GLYCOL 35%)     | Circuit #1 | 110-120 | 1   | 60   | 4.14     | 435   | 2+G   | Leads Multiple | 20.00 | 7603            | 7040            |        |
|                                |        |        |       | Remote (R744 TRANSCRIT) | Circuit #1 | 110-120 | 1   | 60   | 4.76     | 212   | 2+G   | Leads Multiple |       | 7603            | 7040            |        |
| GP841RRLB                      | 97.50  | 99.75  | 3.50  | Remote (DX)             | Circuit #1 | 110-120 | 1   | 60   | 5.86     | 656   | 2+G   | Leads Multiple | 20.00 | 10109           | 9360            | 1,400  |
|                                |        |        |       | Remote (GLYCOL 35%)     | Circuit #1 | 110-120 | 1   | 60   | 5.86     | 656   | 2+G   | Leads Multiple | 20.00 | 10109           | 9360            |        |
| GP1041RRLB                     | 121.00 | 123.25 | 40.50 | Remote (DX)             | Circuit #1 | 110-120 | 1   | 60   | 7.97     | 373   | 2+G   | Leads Multiple | 20.00 | 9504            | 8800            | 2,000  |

\*\*\* Does not include electric defrost on freezer models.

### Regulatory Approvals:

All Models  
 Accordance with AHRI Std 1200  
 ETL Listed to UL 471  
 ETL Listed to CAN/CSA 22.2 No. 120  
 ETL Sanitation to NSF/ANSI 7



In Accordance with  
**AHRI Std 1200**

**DOE 2017**  
 Energy Efficiency  
 Compliant

### Important Notes:

- 1) REMOTE REFRIGERATION NOTE: Condensing unit not included, floor drain required.
- 2) ELECTRICAL NOTE: If GFCI is required, a GFCI breaker MUST be used in lieu of a GFCI receptacle.
- 3) 55" minimum door entry clearance required (without shipping skid).
- 4) Units must be shimmed during installation to ensure unit is level and plumb.
- 5) Pans are not supplied with unit.

**⚠ WARNING:** This product can expose you to chemicals, including Urethane (Ethyl Carbamate), which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).