



Project Name: _____
Location: _____
Item #: _____
Qty: _____

Maxx Cold V-Series 2 Door Reach-In Freezer, Bottom Mount

MVF-49FDHC



Ideal for use in restaurants, cafes, bakeries, catering businesses and more, the Maxx Cold V-Series 2 Door Reach-In Freezer is a smart investment. Offering ample storage space for frozen foods, ingredients and more, this commercial reach-in freezer measures 54"W and has a storage capacity of 42 cubic feet. Built to withstand the demands of a commercial kitchen environment, it is constructed of a durable, easy-to-clean stainless steel exterior and painted aluminum interior.

FEATURES AND CONSTRUCTION

- Reach-in freezer with two self-closing, locking doors with easy-to-grip recessed handles
- Constructed of a durable, easy-to-clean stainless steel exterior and painted aluminum interior
- Automatic defrost system
- Equipped with integrated condensate evaporator; therefore, no drain line connection is needed
- Open door alert beeps when door has been open for 3 minutes
- Includes 6 adjustable heavy-duty wire shelves
- Temperature range -10°F to 10°F (-23°C to -12°C)
- Automatic defrost system
- LED temperature display is easy to read
- Automatic interior lighting

ELECTRIC

115V / 60Hz / 1Ph
Cord Length (Inches): 98.50"
Plug Type: NEMA 5-15P
Cord set included

NEMA 5-15P



3RD PARTY APPROVALS



Intertek



Intertek

WARRANTY (USA / CANADA)

6 Months Parts and Labor, 1 Year Compressor Warranty

For more information, contact:
TechnicalServices@TheLegacyCompanies.com
or 877.368.2797



NOMINAL STORAGE CAPACITY


Cubic Feet: 42.06 cu. ft.

TEMPERATURE


- Holding Temperature (Fahrenheit): -10 - 10
- Efficient forced-air refrigeration system

These models are designed to operate in an environment where temperature and humidity do not exceed 75°F (24°C) and 55% relative humidity


FRONT

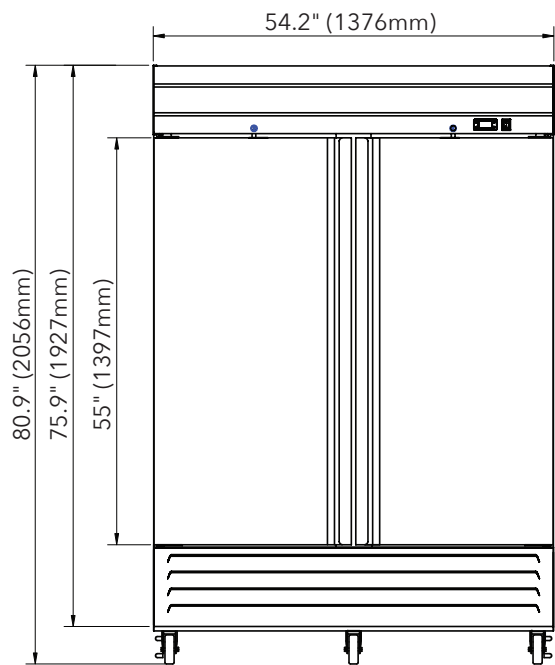

SIDE

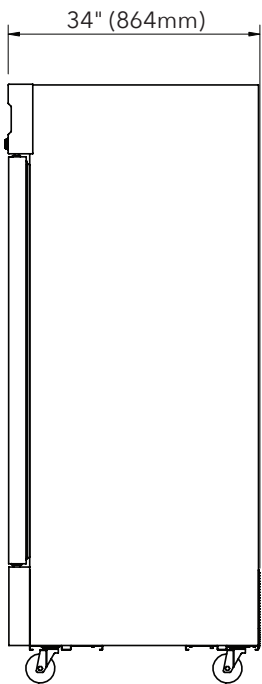

TOP

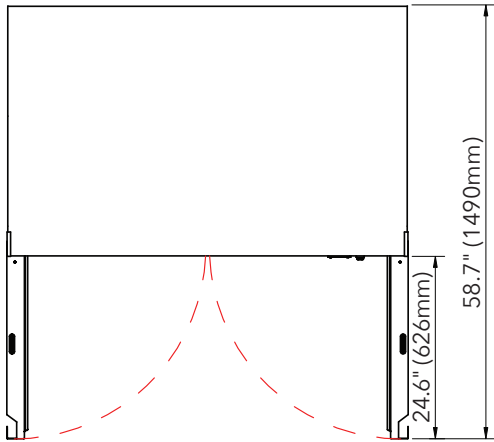

Reach-In

Doors	Shelves	Amps	Refrigerant	Dimensions	Item Weight lbs	Shipping Weight lbs
2	6	2.2A	R290 4.06 oz	34.00" x 54.20" x 80.90"	342.0	438.0

INSTALLATION

- Shorter caster options are available to lower the overall height of the unit

Due to periodic changes in designs, methods, procedures, policies and regulations, the specifications contained in this document are subject to change without notice. While we exercise good faith efforts to provide information that is accurate, we are not responsible for errors or omissions in information provided or conclusions reached as a result of using the specifications. By using the information provided, the user assumes all risks in connection with such use.