

Grease Interceptors

XL Grease Interceptors


- Offering the highest fat, oil & grease separation efficiency that is compacted in a high capacity footprint
- Using the latest materials technology & hydromechanical design
- Designed from the ground up to offer convenience & durability

Inlet baffle / flow control opens and closes for easy inspection and cleaning.

XL75



XL100

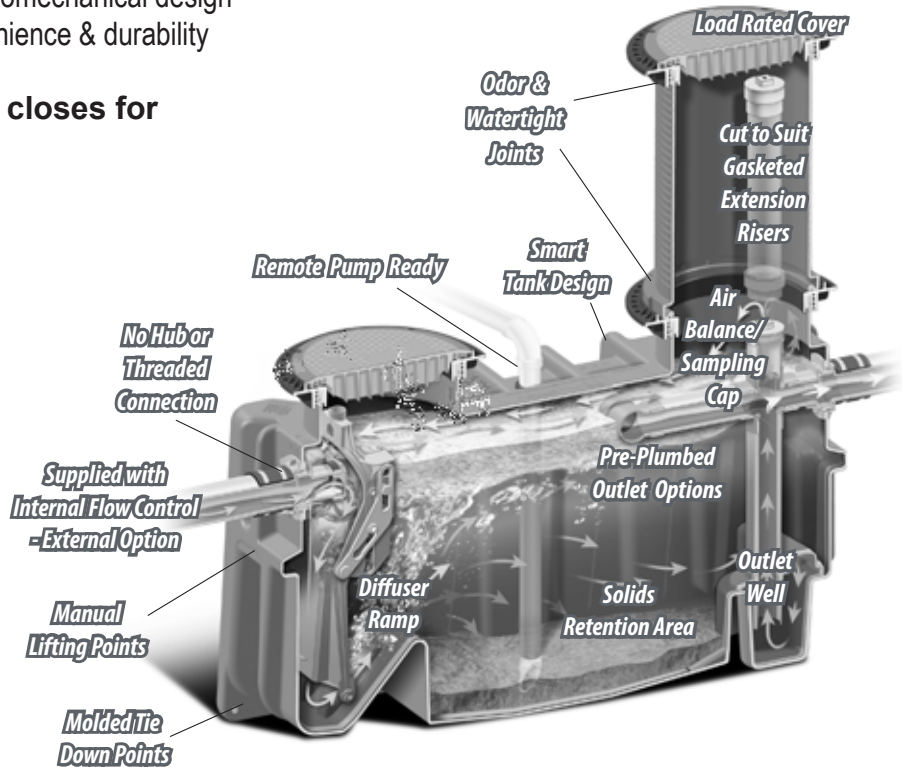

GPM: Gallons Per Minute
LPS: Liters Per Second

Item No.	Size GPM/ lb	Connection Size (in)	Flow Rate GPM/ LPS	Actual Grease Capacity (ASME 112.14.3)		G. W. (lb)
4075A04	75 / 150	4	75 / 4.73	559lb.	253kg	251
4075A04T	75 / 150	4	75 / 4.73	559lb.	253kg	254
40100A04	100 / 200	4	100 / 6.31	1058lb.	480kg	302
40100A04T	100 / 200	4	100 / 6.31	1058lb.	480kg	302

Full Stainless Steel Waste Receptacles



- All S/S waste receptacle w/ top tray shelf
- Single Ø10-1/2" opening for refuse disposal
- Doors open 270 degrees for easy access to waste bins
- Durable stainless steel construction for easy-to-clean applications



Replacement Part:
FT-ZN2N
2-1/2" adjustable leg



Optional Replacement:
KT-2111
2-5/8" Caster w/ brake

Item No.	Dimension (in)	Inner Space (in)	Trash Can Gallon	G. W. (lb)
S-WRA	21-1/2 x 21-1/2 x 54-1/2	20 x 19-1/4 x 32-1/2	27	101
S-WRA32	26 x 26 x 54-1/2	24-1/2 x 23-3/4 x 32-1/2	32	138