



LOW BOY REFRIGERATOR SELF-CONTAINED -LB- SERIES


ITEM # _____

QTY. _____

PROJECT:

CONSULTANT:

30" DEEP UNITS

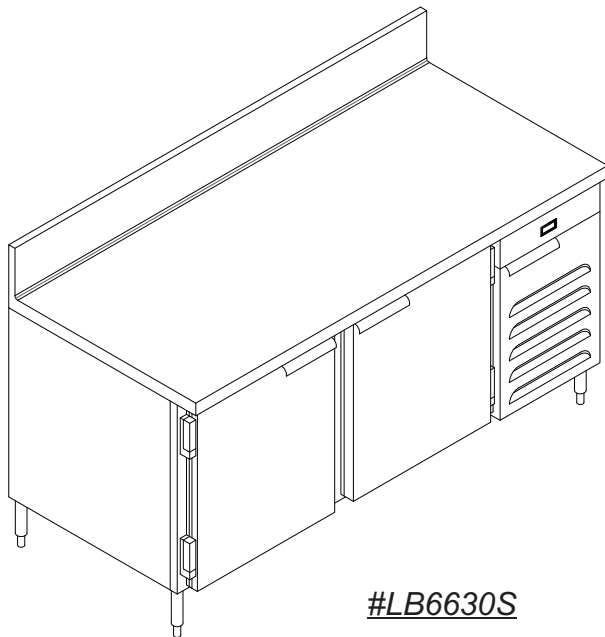

#LB6630S

CONSTRUCTION FEATURES

- **TOP** - ONE PIECE 14 GA. TYPE 300 STAINLESS STEEL WITH CHANNEL EDGE FRONT AND SIDES, TURN DOWN WITH 6" HIGH BACKSPLASH.
- **EXTERIOR REAR AND BOTTOM** - 20 GA. GALVANNEAL
- **FRONT AND ENDS** - 20 GA. STAINLESS STEEL
- **INTERIOR** - MANUFACTURED WITH COVED CORNER CONSTRUCTION USING ALL TYPE 300 STAINLESS STEEL. ALL UNITS ARE FULLY INSULATED WITH HIGH DENSITY **FOAMED-IN-PLACE** POLYURETHANE.
- **DOORS** - 20 GA. STAINLESS STEEL WITH STAINLESS STEEL INTERIOR AND INSULATED WITH HIGH DENSITY **FOAMED-IN-PLACE** POLYURETHANE. DOORS ARE SELF CLOSING AND USE REMOVABLE SNAP-IN GASKETS FOR EASY CLEANING AND REPLACEMENT.
- **REFRIGERATION SYSTEM** - ALL REFRIGERATORS USE R-448A REFRIGERANT COMPRESSOR WITH HOT GAS CONDENSATE EVAPORATOR IS MOUNTED AT RIGHT END. EVAPORATOR BLOWER IS INSTALLED WITH EXPANSION VALVE AND SOLENOID VALVE. THERMOSTAT IS MOUNTED IN APRON. REFRIGERATOR MAINTAINS A TEMPERATURE IN COMPLIANCE WITH NSF.
- **LEGS** - 2" DIAMETER HEAVY DUTY ADJUSTABLE (6"-8") STAINLESS STEEL.
- **ELECTRICAL CONNECTION** - 115 VOLTS, 60 CYCLE, SINGLE PHASE. ALL UNITS PROVIDED WITH 6'-0" CORD AND PLUG-NEMA 5-15P.

OPTIONS AND ACCESSORIES

- | | | |
|--|--|---|
| ☐ 180° ROLLED EDGE | ☐ 5" DIAMETER POLY CASTERS | ☐ 12 X 20 HOT FOOD WELL OVER COMP. HOUSING |
| ☐ BULLNOSE EDGE | ☐ PLASTIC LAMINATE FRONT | ☐ 208 VOLT SINGLE PHASE |
| ☐ INVERTED "V" EDGE | ☐ PLASTIC LAMINATE LEFT END | ☐ 208 VOLT THREE PHASE |
| ☐ RAISED ROLLED EDGE | ☐ PLASTIC LAMINATE RIGHT END | ☐ 50 CYCLE FOR SPECIAL APPLICATION |
| ☐ RAISED CHANNEL EDGE | ☐ PLASTIC LAMINATE REAR | ☐ SPECIAL BODY HEIGHT |
| ☐ SPECIAL HEIGHT SPLASH: _____ | ☐ DIAL THERMOMETER | ☐ CYLINDER LOCKS |
| ☐ LEFT END RETURN SPLASH | ☐ FULL LENGTH RECESSED HANDLES | ☐ FLANGED FEET |
| ☐ RIGHT END RETURN SPLASH | ☐ COATED BLOWER COIL | ☐ S/S KICK PLATES |
| ☐ 1/2" THICK POLY CUTTING BOARD | ☐ SLIDING GLASS DOORS | ☐ S/S CHANNEL BASE |
| ☐ 1/2" THICK RICHLITE CUTTING BOARD | ☐ HINGED GLASS DOORS | ☐ OMIT BACKSPLASH (TURNDOWN EDGE) |
| ☐ STAINLESS STEEL BACK | ☐ 6" DEEP SINK OVER COMP. HOUSING | |
| ☐ LEFT SIDE MECHANICAL COMP. | | ☐ OTHER: _____ |

NOTE: OTHER OPTIONS AND ACCESSORIES AVAILABLE. PLEASE SEE ACCESSORY PAGE AT THE END OF THIS SECTION.



EMI Is the Leader in "PRE-ENGINEERED" Custom Fabrication

301 Division Street Boonton, NJ 07005
PHONE: (973) 423-0226 FAX: (973) 423-1638
TOLL FREE: (800) 322-9925

WEBSITE: www.emiindustries.com

EMI is constantly engaged in a program of improving our products. Therefore, we reserve the right to change specifications without prior notice.



**PAGE
A-27**



LOW BOY REFRIGERATOR SELF-CONTAINED -LB- SERIES


ITEM # _____

QTY. _____

PROJECT: _____

CONSULTANT: _____

30" DEEP UNITS

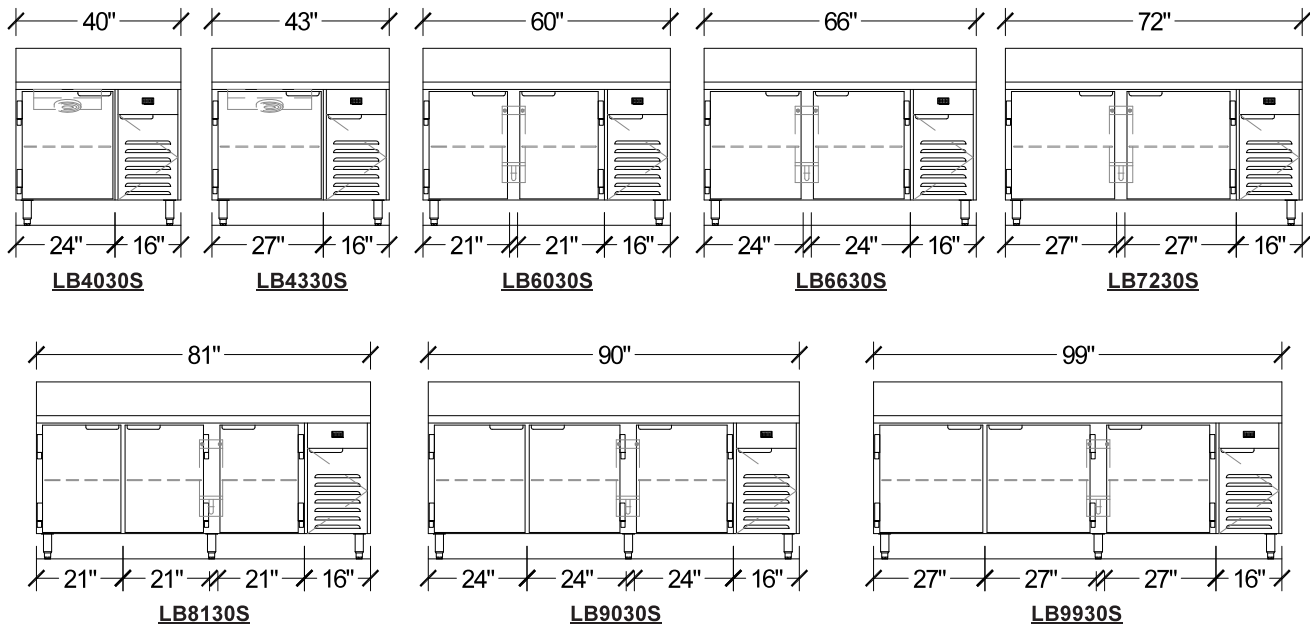

SPECIFICATION DATA



MODEL	DOORS	OVERALL LENGTH	CUBIC FEET	COMP. HP	VOLTAGE	AMPS	SHELVES	CRATED WEIGHT
LB4030S	1 - 24"	40	6.48	1/4	115/60/1	4.0	1	345
LB4330S	1 - 27"	43	7.38	1/4	115/60/1	4.0	1	360
LB6030S	2 - 21"	60	12.37	1/4	115/60/1	4.8	2	405
LB6630S	2 - 24"	66	14.16	1/4	115/60/1	4.8	2	425
LB7230S	2 - 27"	72	15.96	1/4	115/60/1	4.8	2	440
LB8130S	3 - 21"	81	19.15	1/4	115/60/1	4.8	3	475
LB9030S	3 - 24"	90	21.84	1/3	115/60/1	6.2	3	530
LB9930S	3 - 27"	99	24.54	1/3	115/60/1	6.2	3	545

MECHANICAL DATA

LEGEND

CONDENSING UNIT WIRED TO
JUNCTION BOX/HARNESS

JB

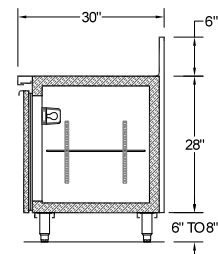JUNCTION BOX/HARNESS WITH 6'-0"
CORD AND PLUG (NEMA 5-15P)

SECTION VIEW

**EMI**

Is the Leader in "PRE-ENGINEERED" Custom Fabrication

301 Division Street Boonton, NJ 07005

PHONE: (973) 423-0226 FAX: (973) 423-1638

TOLL FREE: (800) 322-9925

WEBSITE: www.emiindustries.com

EMI is constantly engaged in a program of improving our products. Therefore, we reserve the right to change specifications without prior notice.

**PAGE
A-28**