



WLR60B-D4

Worktop 60" Side Mount
Refrigerator with Four Drawers



WLR60B-D4
11/15/24
Item # 13701

W x D x H

60" x 33.25" x 40.25"*

Work Height 36"*

*with 6" casters



Dimensions / Capacity

Interior Storage Capacity (CF) (AHAM)

Overall Width x Depth (including 1" bumper)

Height (including 6" casters)

Drawer Opening Width x Depth

Depth with Drawer Fully Open (including 1" bumper)

Crated Weight

Crated Length x Width x Height

Two-Section WLR60B-D4

17.22 ft³

60" x 33.25"

40.25"

19.5" x 9"

57.5"

430 lbs.

63.75" x 35.75" x 40"

Electrical / Refrigeration

Voltage

HACR Breaker

Electrical Connection (NEMA)

Voltage Range

Ambient Temp. Range

Control Setpoint Range

Recommended Setpoint

Amperage

Energy Consumption (kWh/day) @NSF

Heat Rejection (BTU/Hr.) @NSF

Approx. Nominal Compres. BTU/HR (HP)

Refrigerant / Charge Amount (oz)

Two-Section WLR60B-D4

115/60/1

15.0 Amps

5-15P ⚡

104-126

45° to 100°F

28° to 45°F

36°F

3

1.26

305

1354 (1/5HP)

R290 (2.2 oz)

Options

- ☐ 2" Casters (HS-5037, set of 4)
- ☐ 4" Casters (HS-5035, set of 4)
- ☐ Overshelves (HS-5639, single)
- ☐ Overshelves (HS-5640, double)

- ☐ Drawer divider bar (HS-4007, Vertical)
- ☐ Drawer divider bar (HS-5692, Horizontal)
- ☐ Drawer liner (HS-5741)



Valid in United States, Canada, Puerto Rico and U.S. Territories. *Please visit hoshizakiamerica.com/support/warranty/ for more information.

If GFCI is required, a GFCI breaker MUST be used in lieu of GFCI receptacle

Hoshizaki reserves the right to change specifications without notice.




WLR60B-D4

Worktop 60" Side Mount
Refrigerator with Four Drawers




WLR60B-D4
11/15/24
Item # 13701


FRONT VIEW

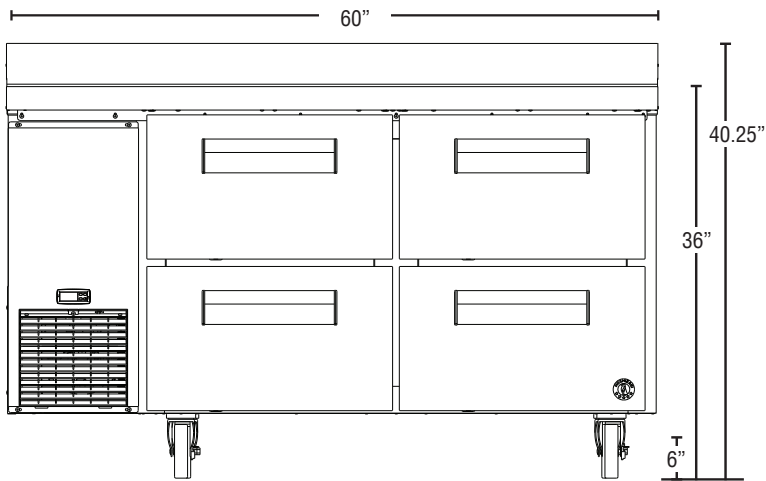

SIDE VIEW

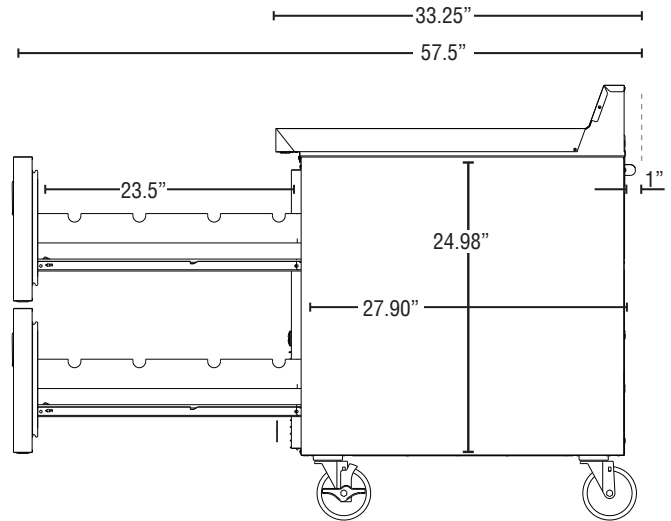


PLAN VIEW

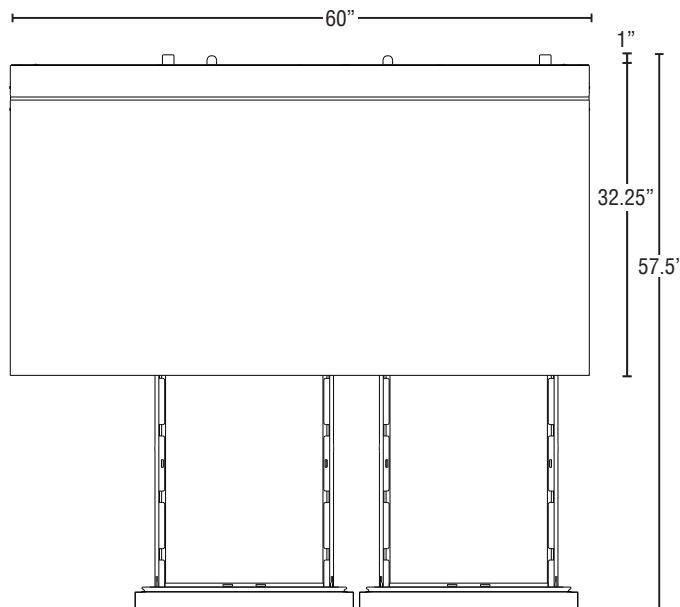

HS-4007 Drawer
Divider Bar

Horizontal bar
comes standard
with model
(HS-5692)



1/3

1/2

1/3

1/2

Cabinet Construction

The exterior cabinet top, front, and sides, are constructed of high quality stainless steel. The exterior back and bottom are constructed of coated steel. The cabinet interior features stainless steel back, sides, and floor with a stainless steel top. Mounted on anodized aluminum pilasters the shelves are adjustable in $\frac{1}{2}$ " increments. Cabinet walls are insulated with 2" CFC free, foamed in place polyurethane. 6" polyolefin, stem casters (two with brakes) are standard.

Drawer Construction

Drawer fronts are constructed of high grade stainless steel inside and out and are insulated with 2" CFC free foamed in place polyurethane. Each drawer accommodates (2) 12" X 10" X 6" and (2) 12" x 6" x 6" deep pans (pans by others). Drawer module frames are formed of 14 gauge stainless steel all welded construction and securely fastened in the cabinet. The drawer slides are constructed of 14 gauge stainless steel with delrin nylon rollers to prevent metal to metal contact between the drawer slides and help reduce wear. The drawer slides have a dynamic load capacity of 200 pounds. Drawers are provided with a one-piece extruded aluminum flush mount handle. Snap-in magnetic drawer gaskets are durable and easily removed for cleaning.

Refrigeration System

The high efficiency refrigeration system is self-contained with an E-coated evaporator for extended life. Condensate removal is accomplished with an energy efficient non-electric evaporation system. A capillary tube controls the flow of environmentally friendly R290 refrigerant through the evaporator. Refrigeration system utilizes an off-cycle defrost to eliminate any ice on the evaporator coil. 115 volt units are equipped with a ten foot cord and plug (20.0 amps or less).