



IQ 2700

THREE PHASE
208-230 V / 60 Hz

MODULAR GRANULAR ICE MACHINE

3 YEARS
WARRANTY
PARTS & LABOR



FEATURES

- ▶ PRODUCES WET GRANULAR ICE
- ▶ THE MOST EFFICIENT EVAPORATOR OF THE MARKET, LOWER ENERGY CONSUMPTION AND HIGHER ICE PRODUCTION
- ▶ EVAPORATOR WITHOUT GASKETS OR SEALS
- ▶ STAINLESS STEEL AUGER WITH RESILIENT COATING TO MAXIMIZE LIFESPAN
- ▶ POWERFUL SPEED REDUCER ON TOP
- ▶ AISI 304 STAINLESS STEEL BODY
- ▶ ELECTROMECHANICAL CONTROL SYSTEM
- ▶ ICE DROPS OUT THROUGH THE OPENING ON THE BOTTOM OF THE UNIT
- ▶ ON/OFF LIGHTED ROCKER SWITCH IN FRONT PANEL
- ▶ TROPICALIZED MACHINES (T CLASS)

I THE INSTALLATION OF AN ANTI-SCALE FILTER AND PERIODIC CLEANING ARE ADVISED IN AREAS WITH MEDIUM OR HIGH LIMESCALE CONTENT (HARD WATER)



		70°F/21°C	50°F/10°C	90°F/32°C	70°F/21°C			
	24 H	lbs (Kg)	lbs (Kg)	lbs (Kg)	lbs (Kg)	in (mm)	in (mm)	
IQ 2700 A		2860 (1297)	2060 (934)	52.56"(1,335)	24.02"(610)	55.12"(1,400)	26.97"(685)	WET GRANULAR ICE 25% RESIDUAL WATER CONTENT
IQ 2700 W		2900 (1315)	2100 (953)	32.09"(815)	35.04"(890)			

ACCESSORIES

NOT INCLUDED (OPTIONAL)



10" FILTER
ANTI-LIMESCALE + ANTI-CHLORINE
CS-101 K



10" REPLACEMENT CARTRIDGE
ANTI-LIMESCALE + ANTI-CHLORINE
CS10



SCALE KLEEN

RECOMMENDED BINS



S1050 + IQ 2700



SCD900 + IQ 2700



SCD1400 + IQ 2700




SCD1800 + IQ 2700


TECHNICAL SCHEME

IQ 2700


RIGHT SIDE VIEW




FRONTAL VIEW

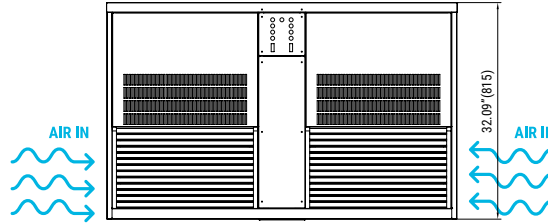

REAR VIEW

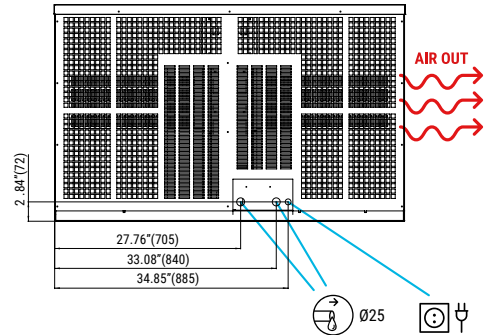

CENTRAL CROSS SECTION VIEW OF THE BASE

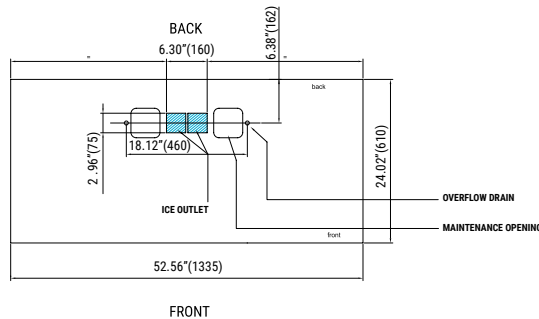

OPERATING CONDITIONS

* All dimensions in inches (and mm)

PRODUCTION (LBS) 60Hz

±10% V

50°F/109°F

41°F/100°F

14.5 psi (1 bar) / 87 psi (6 bar)

V	Hz	ph
208-230	60	3N



IQ 2700 AIR COOLED

°F °C	50° 10°	60° 15°	70° 21°	86° 30°
50° 10°	3050	2880	2580	2290
68° 21°	2860	2680	2380	2100
90° 32°	2440	2250	2060	1830
109° 43°	2000	1830	1672	1400



IQ 2700 WATER COOLED

°F °C	50° 10°	60° 15°	70° 21°	86° 30°
50° 10°	3093	2920	2630	2334
68° 21°	2900	2717	2426	2141
90° 32°	2474	2281	2100	1866
109° 43°	2028	1856	1704	1427

MODELS

IQ 2700 A

IQ 2700 W

 Temp. Ev. (°F)	 ASHRAE CONDITIONS CONDICIONES ASHRAE (BTU/h) (W)	 (W) 109°F	 (AWG/mm²) (n.)	 FUZE	 100lbs 90°F / 70°F (Kwh/100 lbs)	 gal 100lbs (l/h)	 HEAT REJECTED (BTU/h) (W)	 (lbs)	 (lbs)
 5°	17,938 5,257	3,400	14/1.5 5	16	4.2	14.3 54.1	13,584 3,981	463	573
 5°	17,938 5,257	3,400	14/1.5 5	16	4.2	57.8 219	13,584 3,981	463	573



ITV Ice Makers, Inc.
9550 Satellite Blvd, Suite 100
Orlando, FL 32837
Phone: 1 407 826 1860 | Fax: 1 407 826 1861
Toll Free: 1 888 488 1423
sales@itvice.com | www.itvice.com



SERVICE
service@itvice.com
Skype: service@itvice.com
PHONE: +1 888 488 1423
FROM 8AM TO 5PM EST



2 ADDITIONAL YEARS
ON COMPRESSOR &
EVAPORATOR
Read our warranty policy to
know more about
limitations and exclusions

