



4184 E. Conant St.
Long Beach, CA 90808
Tel. 310-900-1000
Fax. 310-900-1077
www.turboairinc.com

Project:	
Model #:	
Item #:	
Available W/H:	Qty:
Approval:	
AIA #:	SIS #:
CSI Section 11400	

Glass Door Proofer

Reach-In
PRO Series

FEATURES & BENEFITS

Digital temperature control & monitor system

- Keeps constant proofing temperature with less variation
- Alarm beeps when doors are not sealed
- Digital display allows for easy monitoring and control
- Sensitive touch display

Ducted fan air distribution system for even proofing

- Maintains temperature within the food zone
- Proofing evenly top to bottom with less temperature variation

On/Off switch

ON/OFF switch is located on control panel

All stainless steel cabinet construction

The PRO series model boasts a stainless steel interior and a **22 gauge** stainless steel exterior (galvanized steel top, bottom). It guarantees the utmost in cleanliness and long product life. The PRO series model adds a touch of style to the most refined setting.

Sturdy, clean stainless steel shelving

Shelves are the most important part of cleanliness as they come in direct contact with food. After a while, PVC coated wire shelves may peel, rust and lead to unsanitary conditions. Only the Turbo Air PRO series uniquely provides stainless steel shelving.

LED interior lighting

High-density polyurethane insulation

The entire cabinet structure and solid doors are foamed-in-place using high density, CFC free polyurethane insulation.

Full length glass doors with locks

Self-closing doors with stay open feature at 120 degrees

Proofing temperature 70°F ~ 115°F and proofing timer 30min ~ 150min for precise control

The adjustable proofing temperature and timer support a wide variety of proofing needs.

Lifetime guaranteed heavy duty hinges and handles



Model	Swing Door	CU./FT.	#of Shelves	Wattage (w)	AMPS	Crated Weight (lbs.)	L x D* x H [†] (inches)
PRO-26H2-G-PF	1	25	3	1550	7.5	314	28 ^{3/4} x 34 ^{1/8} x 78

Model : PRO-26H2-G-PF

ELECTRICAL DATA	
Voltage	208~230V/115V/60Hz/1Ph
Plug Type	 NEMA L14-20P
Full Load Amperes	7.5
Wattage (W)	1550
Cord Length (ft.)	8
DIMENSIONAL DATA	
# of Doors	1
# of Racks Accepted	1
Net Capacity (cu. ft.)	25
Ext. Length Overall (in.)	28 3/4 (730mm)
Ext. Depth Overall (in.) [*]	34 1/8 (866mm)
Ext. Height Overall (in.) [†]	78 (1980mm)
Int. Length Overall (in.)	23 7/8 (607mm)
Int. Depth Overall (in.)	27 1/2 (700mm)
Int. Height Overall (in.)	59 1/4 (1504mm)
# of Shelves	3
Shelf Size (L x D) (in.)	23 1/2 x 26 3/8
Net Weight (lbs.)	269
Gross Weight (lbs.)	314

Design and specifications subject to change without notice.


Actual shipping weight may differ due to extra packing materials for product protection.

* Depth does not include 1-1/4" for door handles.


† Height does not include 5" for caster height.

PLAN VIEW

(unit : inch)

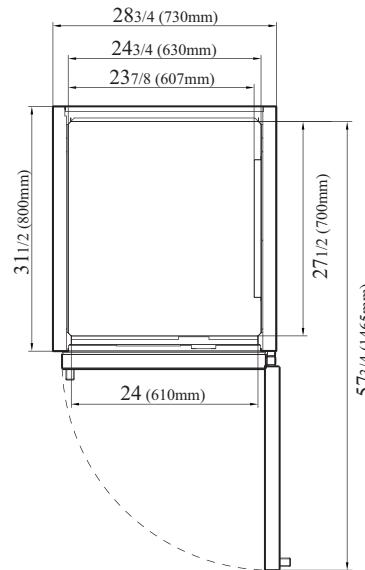

TOP VIEW

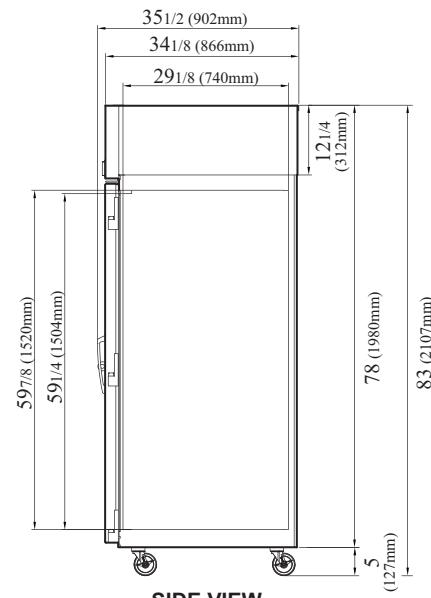

SIDE VIEW

Ver.20250723

- **Turbo Air:** 800-627-0032 ■ **Bake Tech Innovation:** 800-500-3519
- **Warranty:** 800-381-7770 ■ **AC:** 888-900-1002



TURBO AIR

BAKE TECH
INNOVATION

TURBO AIR

TEXAKING

Continued product development may necessitate specification changes without notice.