




A family company manufacturing in the USA

www.glastender.com

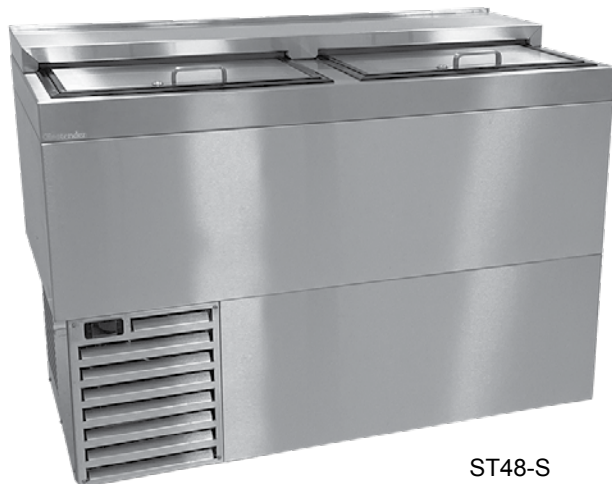

ST48-S

Project: _____	AIA# _____
Item #: _____ Qty: _____	SIS# _____
Model #: _____	

Slide Top Coolers

ST

ST24, ST36, ST48, ST60, ST72, ST96

Configurable Options

Finish:

- Black vinyl-clad steel with galvanized steel back
- Stainless steel front, sides, and back

Legs:

- 6"

Casters:

- 4-1/8"
- 2-7/8"
- 1-1/2"



Intertek



Intertek

4004503

Conforms to NSF/ANSI STD 7 and UL STD 471

Certified to CSA STD C22.2 No. 120

Meets NSF 7 requirements for closed container products



Intertek

EP 5016978

Energy Performance

Verified / Rendement

Énergétique Vérifié

Standard Features

- Self-contained refrigeration
- All stainless steel interior with radius corners for easy cleaning
- One-piece integral top and mullion design
- Easy to plan exterior dimensions: 24" front to back and 24", 36", 48", 60", 72", or 96" left to right
- Automatic defrost cycle
- Automatic condensate evaporator - no drain connection required
- Door lock(s)

Glastender, Inc. • 5400 N Michigan Rd • Saginaw, MI • 48604-9780
989.752.4275 • 800.748.0423 • Fax 989.752.4444
www.glastender.com

Specifications subject to change without notice. For current specifications please visit our website.

Approval/Notes:

Slide Top Coolers

Specifications

		ST24	ST36	ST48	ST60	ST72	ST96
Dimensions	Length	24"	36"	48"	60"	72"	96"
	Number of Doors	1	1	2	2	3	4
	Door Opening	n/a	n/a	n/a	n/a	n/a	n/a
Electrical	Electrical Supply	120V, 1 phase, 60 Hz, dedicated 15A circuit required					
	Full Load Amps	4.5					
	Plug Type	9 foot NEMA 5-15P grounded cord and plug which exits the back of refrigeration compartment*					
Refrigeration	Refrigerant	R290 - 125 grams, 4.41 oz., 0.28 pounds					
	Compressor	Reciprocating, 1/6 HP, 1300 BTUH, 0.11 Tons					
	Heat Rejection	1840 BTUH					
Operating Range		34°F (1°C) to 40°F (4°C)					
Plumbing		Interior floor drain and condensate drain to automatic evaporator. No drain connection required †					
Vertical Wire Partitions		1	2	3	4	4	5

Materials

- Stainless steel parts include: top, door, interior and optional legs. Also, front, sides and back on '-S' models
- Black vinyl-clad steel parts include: front and sides on '-B' models
- Galvanized steel parts include: base on all models and exterior back on '-B' models



5-15P

† Building conditions outside the guidelines of ASHRAE 55 and ASHRE 62.1 may need to be plumbed to a drain.

Capacities

	ST24	ST36	ST48	ST60	ST72	ST96
Bottles	144	226	330	478	610	826
Cases	6.0	9.4	13.8	19.9	25.4	34.4




5400 N Michigan Rd • Saginaw, MI • 48604-9780
 989.752.4275 • 800.748.0423 • Fax 989.752.4444
www.glastender.com

Printed in USA

Slide Top Coolers


Drawings

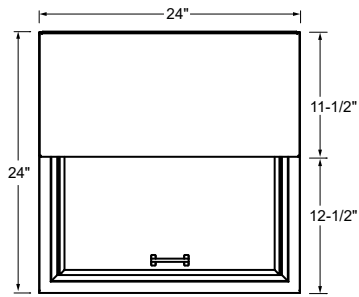


PLAN VIEW

ST24*

*ALL MODELS SHOWN
WITH OPTIONAL 6" LEGS

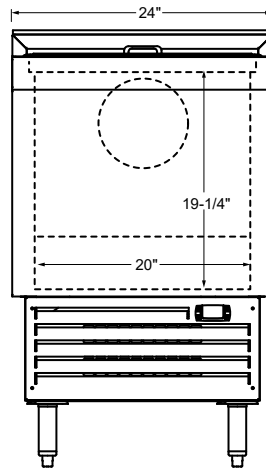


FRONT ELEVATION

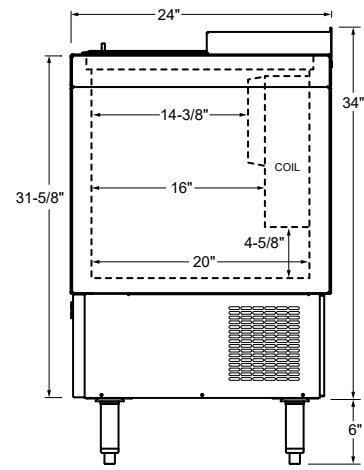


SIDE ELEVATION

PLAN VIEW

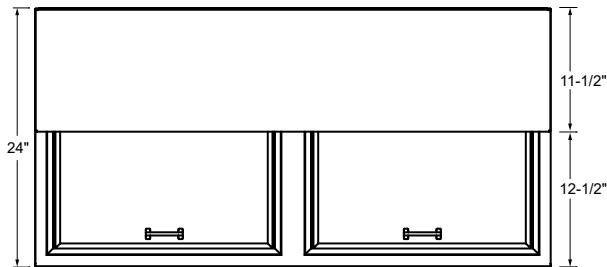


FRONT ELEVATION

ST36*, ST48*, ST60*, ST72*, ST96*

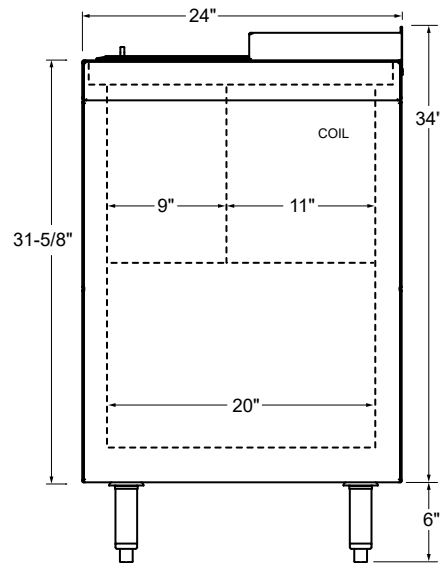

SIDE ELEVATION

OPTIONAL LEGS AND CASTERS

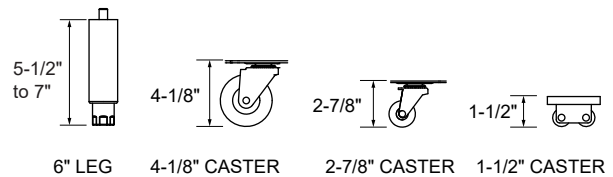

6" LEG 4-1/8" CASTER 2-7/8" CASTER 1-1/2" CASTER

Model	A	B	No. of Doors
ST36	36"	19-1/8"	1 Large
ST48	48"	31-1/8"	2 Standard
ST60	60"	43-1/8"	1 Large, 1 Standard
ST72	72"	55-1/8"	3 Standard
ST96	96"	79-1/8"	4 Standard

Glastender

5400 N Michigan Rd • Saginaw, MI • 48604-9780
989.752.4275 • 800.748.0423 • Fax 989.752.4444
www.glastender.com

Printed in USA