



A family company manufacturing in the USA

www.glastender.com



C1SL48
with compressor left,
stainless steel doors,
and stainless top



Intertek

EP 5016978

Energy Performance
Verified / Rendement
Énergétique Vérifié



Intertek

4004503

Conforms to NSF/ANSI STD 7
and UL STD 471

Certified to CSA STD C22.2 No. 120
Listed to NSF Standard 7
for open food as a storage refrigerator



Intertek

Standard Features

- Self-contained
- Stainless steel interior
- Locking door(s)
- LED interior lighting
- Heated mullion to minimize condensation


Project: _____	AIA# _____
Item #: _____ Qty: _____	SIS# _____
Model #: _____	

Coolers, One Zone, Side Serviced, Low Profile


C1SL

C1SL20, C1SL24, C1SL28,
C1SL36, C1SL44, C1SL48

CONFIGURATION HIGHLIGHTS



**DOORS
IN NINE
FINISHES**



**DRAWERS
IN FIVE
FINISHES**

Configurable Options

Temperature:

- Beer/Food - 34°F to 40°F
- White wine - 50°F to 55°F
- Red wine - 60°F to 65°F

Refrigeration Compartment

Location:

- Left or Right

Refrigeration Compartment

Cover Finish:

- Black vinyl-clad
- Stainless steel
- Jeweled stainless

Door Style & Finish

(specify per door section):

- Black vinyl-clad
- Stainless steel
- Jeweled stainless
- Laminated
- Unlaminated
- Glass, black vinyl-clad
- Glass, stainless steel
- Glass, jeweled stainless
- Glass, laminated

Drawer Style & Finish:

- Black vinyl-clad
- Stainless steel
- Jeweled stainless
- Laminated
- Unlaminated

Door Hinge Location

(specify for each door):

- Left or Right

Door Handle:

- Signature
- Pull-tab
- Tube

Shelving

(specify per door section):

- Two adjustable, coated-wire shelves
- Pull-out wine shelves (C1SL36, and C1SL20 excluded):
 - » one upright and two horizontal storage combination
 - » four horizontal storage or five if not next to compressor compartment

Top Style:

- No finished top
- Stainless top
- Drainboard top

Left and Right Side Finish:

- Black vinyl-clad
- Stainless steel

Back Finish:

- Galvanized steel
- Stainless steel

LED Lighting Style:

- Bright white (7,000k)
- Warm white (3,500k)
- Amber (2,700k)
- Blue

Glastender, Inc. • 5400 N Michigan Rd • Saginaw, MI • 48604-9780
989.752.4275 • 800.748.0423 • Fax 989.752.4444
www.glastender.com

Specifications subject to change without notice. For current specifications please visit our website.

Approval/Notes:

Coolers - One Zone, Side Serviced, Low Profile

Specifications


		C1SL20	C1SL24	C1SL28	C1SL36	C1SL44	C1SL48
Dimensions	Length	20"	24"	28"	36"	44"	48"
	Number of Sections	1	1	1	2	2	2
	Door Opening	12"	17.5"	20"	12"	16"	18"
Electrical	Electrical Supply	120V, 1 phase, 60 Hz, dedicated 15A circuit required					
	Full Load Amps	2.75					
	Plug Type	8 foot NEMA 5-15P grounded cord and plug which exits the back of refrigeration compartment*					
Refrigeration	Refrigerant	R290 - 105 grams, 3.7 oz., 0.23 pounds					
	Compressor	Reciprocating, 1/8HP, 1,000 BTUH, 0.08 Tons					
	Heat Rejection	1126 BTU/hr					
Operating Range		34°F (1°C) to 65°F (18°C)					
Plumbing		Automatic condensate evaporator. No drain connection required †					
Weight Bearing Capacity		Countertops and other accessories should not exceed 500 pounds per door					

Materials

- Stainless steel parts include: exterior sub-top, interior, front of cabinet, hinges, hinge and lock brackets, and optional legs
- Black vinyl-clad steel parts include: standard sides, doors and compressor cover
- Galvanized steel parts include: back and bottom

Plumbing

- Optional drainboard top 1/2" ID drain line runs behind the compressor compartment; field connection required



5-15P

† Building conditions outside the guidelines of ASHRAE 55 and ASHRE 62.1 may need to be plumbed to a drain.

Capacities

		C1SL20	C1SL24	C1SL28	C1SL36	C1SL44	C1SL48
12 oz. bottles, cases		2.8	4.5	5.1	6.9	8.9	10.3
750ml wine bottles		28	36	42	54	72	84
1/2 barrel kegs		N/A	N/A	N/A	N/A	N/A	N/A
1/6 barrel kegs		N/A	N/A	N/A	N/A	N/A	N/A
Capacity values below are per door/drawer section (750ml wine bottles)							
Next to compressor	Drawers	0*	0*	0*	0*	0*	0*
	Upright	N/A	N/A	N/A	N/A	N/A	N/A
	Horizontal	N/A	24	32	N/A	24	28
	Combination pull-out	N/A	34	42	N/A	30	36
Not next to compressor	Drawers	N/A	N/A	N/A	0*	0*	0*
	Upright	N/A	N/A	N/A	N/A	N/A	N/A
	Horizontal	N/A	N/A	N/A	N/A	30	35
	Combination pull-out	N/A	N/A	N/A	N/A	40	52

* Not tall enough for wine bottles




5400 N Michigan Rd • Saginaw, MI • 48604-9780
989.752.4275 • 800.748.0423 • Fax 989.752.4444
www.glastender.com

Printed in USA

Coolers - One Zone, Side Serviced, Low Profile


Drawings

PLAN VIEWS

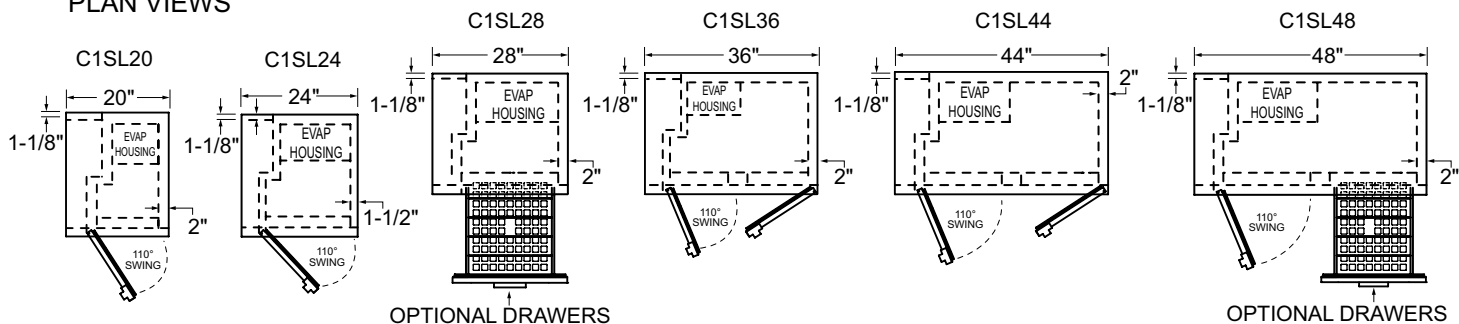


FRONT VIEWS

*ADD 1" HEIGHT TO TOP FOR FACTORY INSTALLED TOP

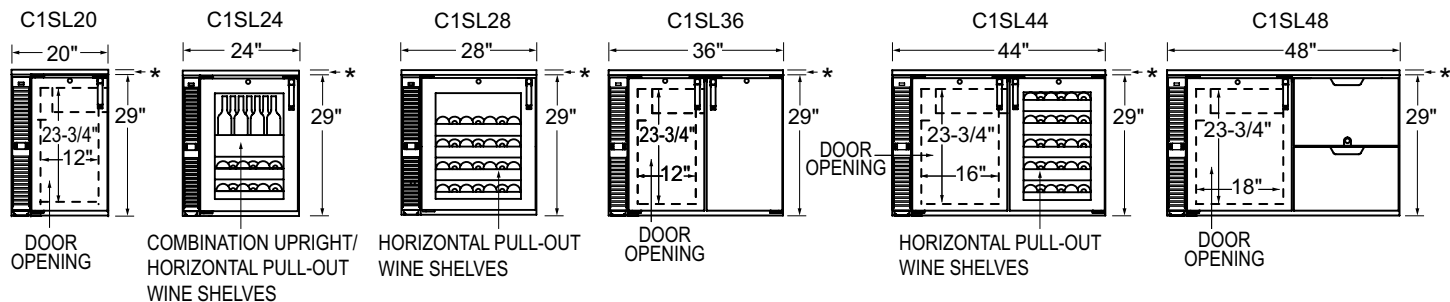


SIDE VIEWS

*ADD 1" HEIGHT TO TOP FOR FACTORY INSTALLED TOP

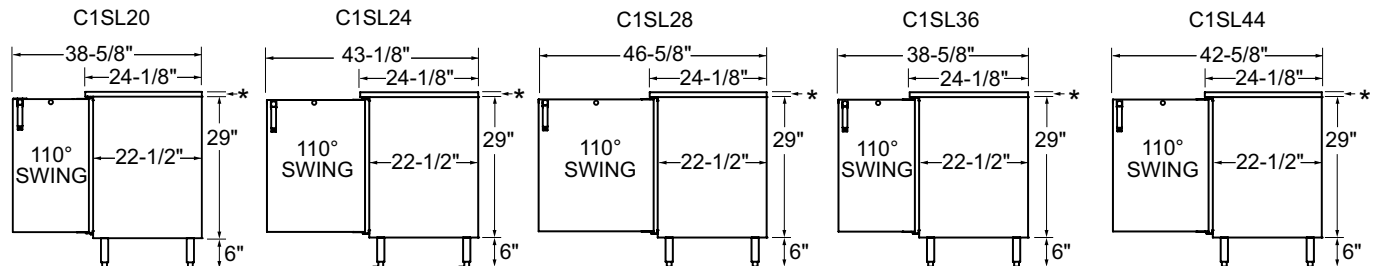

ALL MODELS SHOWN WITH OPTIONAL 6" LEGS

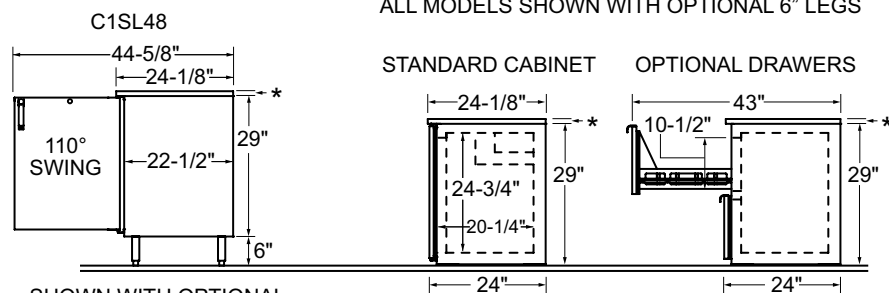

OPTIONAL LEGS AND CASTERS

