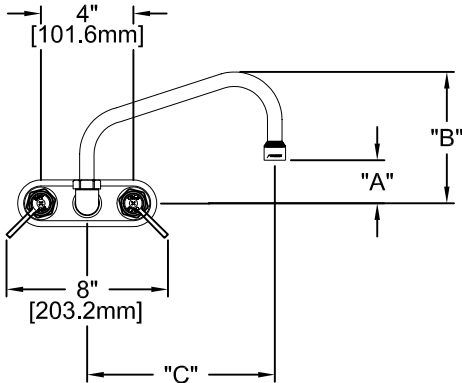
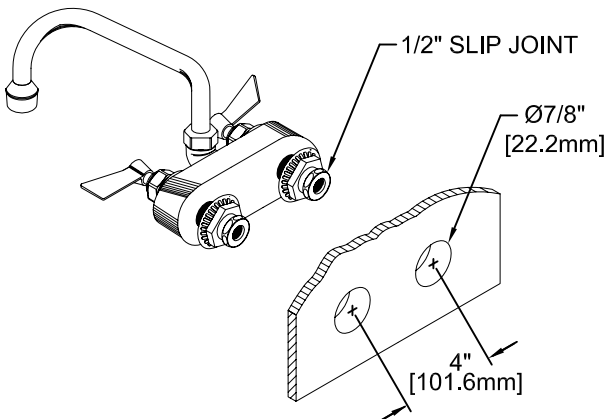


APPLICATION:		PRODUCT NAME: 4" C/C BACKSPLASH FAUCET																													
JOB NAME:		☐ SPECIAL CONFIGURATION ☐ CHECK BASE MODEL AND OPTIONS																													
QUANTITY:	ITEM NO.	MODEL:																													
		☐ 3610 W/6" SWING SPOUT ☐ 3611 W/8" SWING SPOUT ☐ 3612 W/10" SWING SPOUT ☐ 3613 W/12" SWING SPOUT ☐ 3614 W/14" SWING SPOUT ☐ 1783 W/16" SWING SPOUT																													
<table border="1" style="width: 100%; border-collapse: collapse; text-align: center;"> <thead> <tr> <th>MODEL</th> <th>DIM "A"</th> <th>DIM "B"</th> <th>DIM "C"</th> </tr> </thead> <tbody> <tr> <td>3610</td> <td>2" [50.8mm]</td> <td>5-3/8" [136.5mm]</td> <td>6" [152.4mm]</td> </tr> <tr> <td>3611</td> <td>2-1/4" [57.2mm]</td> <td>6" [152.4mm]</td> <td>8" [203.2mm]</td> </tr> <tr> <td>3612</td> <td>2-7/8" [73.0mm]</td> <td>6-1/2" [165.1mm]</td> <td>10" [254.0mm]</td> </tr> <tr> <td>3613</td> <td>3-1/8" [79.4mm]</td> <td>6-3/4" [171.5mm]</td> <td>12" [304.8mm]</td> </tr> <tr> <td>3614</td> <td>4-1/8" [104.8mm]</td> <td>7-3/4" [196.9mm]</td> <td>14" [355.6mm]</td> </tr> <tr> <td>1783</td> <td>4-7/8" [123.8mm]</td> <td>8-3/4" [222.3mm]</td> <td>16" [406.4mm]</td> </tr> </tbody> </table>		MODEL	DIM "A"	DIM "B"	DIM "C"	3610	2" [50.8mm]	5-3/8" [136.5mm]	6" [152.4mm]	3611	2-1/4" [57.2mm]	6" [152.4mm]	8" [203.2mm]	3612	2-7/8" [73.0mm]	6-1/2" [165.1mm]	10" [254.0mm]	3613	3-1/8" [79.4mm]	6-3/4" [171.5mm]	12" [304.8mm]	3614	4-1/8" [104.8mm]	7-3/4" [196.9mm]	14" [355.6mm]	1783	4-7/8" [123.8mm]	8-3/4" [222.3mm]	16" [406.4mm]	OPTIONS OR MODIFICATIONS: ☐ SUPPLY LINES (24" OR 36") CIRCLE LENGTH ☐ DJ SUB-ASSY (7-1/4" OR 13") CIRCLE LENGTH ☐ ELBOWS ☐ VANDAL RESISTANT KIT ☐ HANDLES (CROSS OR WRIST) CIRCLE STYLE ☐ OTHER _____	
MODEL	DIM "A"	DIM "B"	DIM "C"																												
3610	2" [50.8mm]	5-3/8" [136.5mm]	6" [152.4mm]																												
3611	2-1/4" [57.2mm]	6" [152.4mm]	8" [203.2mm]																												
3612	2-7/8" [73.0mm]	6-1/2" [165.1mm]	10" [254.0mm]																												
3613	3-1/8" [79.4mm]	6-3/4" [171.5mm]	12" [304.8mm]																												
3614	4-1/8" [104.8mm]	7-3/4" [196.9mm]	14" [355.6mm]																												
1783	4-7/8" [123.8mm]	8-3/4" [222.3mm]	16" [406.4mm]																												
ROUGH-IN:		FEATURES: * 4" C/C BACKSPLASH * SWIVELLING SEAT DISKS * HOT SIDE STEM - RIGHT HAND * COLD SIDE STEM - LEFT HAND * STAINLESS STEEL SEATS * STAINLESS STEEL SEAT SCREWS * STAINLESS STEEL HANDLE SCREWS * 1/2" SLIP JOINT SYSTEM LIMITS * TEMP: 40°F MIN. TO 140°F MAX. * PRESSURE 200 PSI MAX. STATIC * 2.20 GPM AT 80 PSI SHIPPING WEIGHT * 4.25 LBS																													
		 FISHER MANUFACTURING COMPANY TOLL FREE: 800-421-6162 - FAX: 800-832-8238 information@fisher-mfg.com - www.fisher-mfg.com																													
 ANSI/A112.18.1M																															