



## VC55E SERIES

### Double Deck Electric Convection Oven



Model VC55ED

Shown on optional casters



### SPECIFIER STATEMENT

Double section, electric convection oven, Vulcan Model No. (VC55ED). Stainless steel front, sides, top and legs. Independently operated stainless steel doors with double pane windows. Non-sag insulation applied to the top, rear, sides, bottom and doors. Porcelain enamel on steel oven interiors measure 29"w x 22½"d x 20"h. Two interior oven lights per section. Five nickel plated oven racks per section measure 28¾" x 20½". Eleven position nickel plated rack guides with positive rack stops per section. Each section heated by electric solid sheath elements rated at 12 KW. Furnished with a two speed ½ H.P. oven blower-motor per section. Oven cool switch for rapid cool down. 208 or 240 volt, 60 Hz, 1 or 3 phase.

#### Exterior Dimensions:

40¼"w x 40"d (includes motor & door handles)

37¾"d (includes motor only) x 70"h on 8" legs.

NSF listed. UL listed.

Project \_\_\_\_\_

AIA # \_\_\_\_\_ SIS # \_\_\_\_\_

Item # \_\_\_\_\_ Quantity \_\_\_\_\_ C.S.I. Section 114000

### MODEL

- ☐ **VC55ED** Solid state temperature dial controls adjust from 150° to 500°F with digital display enhancement. 5-hour timer with audible alarm.

### STANDARD FEATURES

- Independently operated removable stainless steel doors with double pane windows
- Gentle Bake mode selector switch
- On-board diagnostics for easy servicing
- Five nickel plated grab-and-go oven racks with eleven rack positions per section
- Stainless steel front, sides, top and legs
- 25 total KW
- ½ H.P. two speed oven blower-motor
- Moisture vent
- Oven cool switch for rapid cool down
- Porcelain enamel on steel oven interiors
- One year limited parts and labor warranty

### OPTIONS

- ☐ Casters
- ☐ 480V/60 Hz/1 or 3 phase
- ☐ Second year extended limited parts and labor warranty

### ACCESSORIES (PACKAGED AND SOLD SEPARATELY)

- ☐ Stainless steel rear motor enclosure
- ☐ Extra oven rack(s)
- ☐ Rack hanger(s)
- ☐ Stainless steel drip pan
- ☐ Down draft flue diverter for direct vent connection

VC55E SERIES – Double Deck Electric Convection Oven

Approved by \_\_\_\_\_ Date \_\_\_\_\_ Approved by \_\_\_\_\_ Date \_\_\_\_\_



#### OPTIONAL VOLTAGES

□ 480 volt, 60 Hz, 3 phase

#### CLEARANCES

	Combustible	Non-Combustible
Rear	2"	2"
Right Side	4"	4"
Left Side	1"	1"

INSTALLATION MANUAL

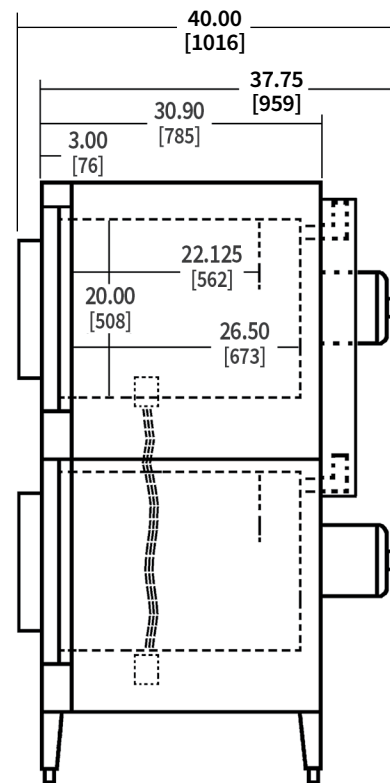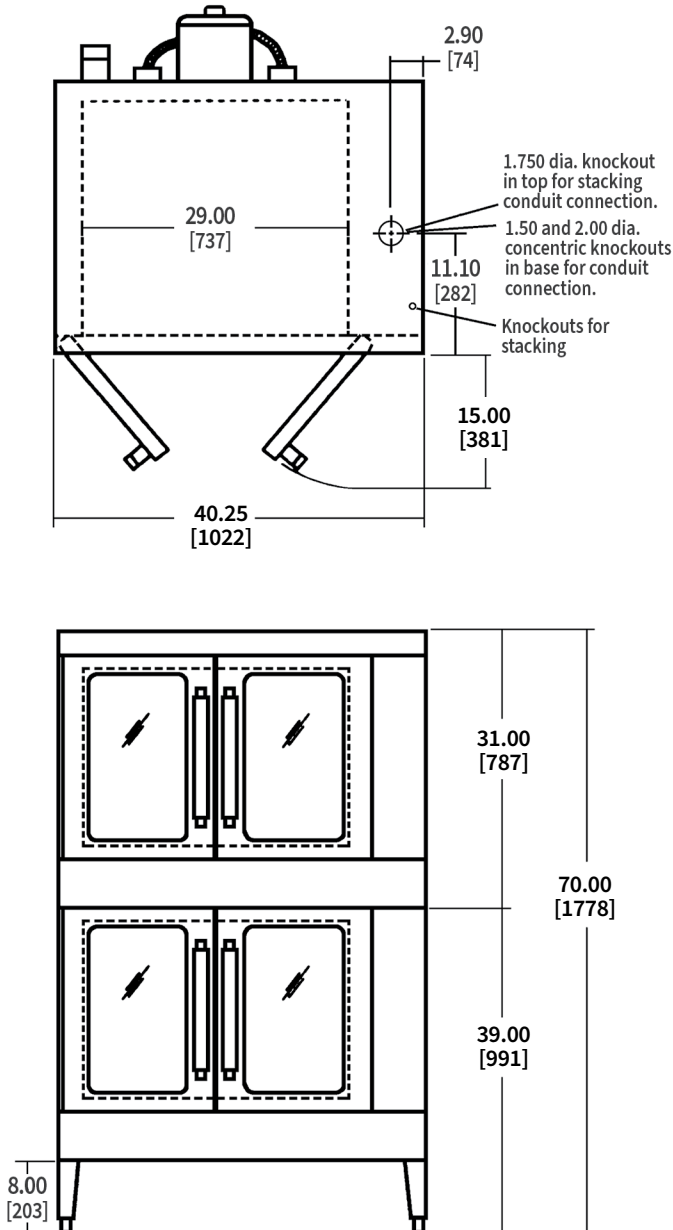

CAD and/or Revit Files Available

Model	Total Conn. KW	3 Phase Load KW per Phase			Nominal Amps per Line Wire									1 Phase		Weight			
					3 Phase											With Skid & Packaging		Without Skid & Packaging	
					208 Volt			240 Volt			480 Volt								
		X-Y	Y-Z	X-Z	X	Y	Z	X	Y	Z	X	Y	Z	208V	240V	Lbs.	KG	Lbs.	KG
VC55E	25	8	8	9	70	66	70	66	58	66	28	30	30	120	104	880	400	778	352

As continued product improvement is a policy of Vulcan, specifications are subject to change without notice.