Grocerant

Refrigerated Self-Service Food Bar 43"D

Structural Concepts®

Delivering Fresh. Always.™

FB3SS-2R
 FB4SS-3R
 FB6SS-4R
 40"L x 43"D x 55-1/2"H
 53"L x 43"D x 55-1/2"H
 66"L x 43"D x 55-1/2"H

Included

- · Blue Fin coated coil
- Clear sneeze guard glass w/ stainless steel posts
- · Condiment pan support rails
- LED 4000K top light(s)
- NOTE: Pans not supplied with case.
- One year parts & labor warranty
- Warmest average product temperature of 40°F or less



Specify	Standard Features	Additional Options
EXTERIOR COLOR	Laminate (stock colors)	Laminate (non-stock colors)
		Powder coated (stock/non-stock colors)
		Powder coated Silversan Black
		Stainless steel
LOWER FRONT PANEL COLOR	Powder coated Silversan Black	Powder coated (stock/non-stock colors)
		Stainless steel
LOWER FRONT PANEL HEIGHT	• 15-5/8" Lower front panel height	8-5/8" Lower front panel height
BASE SUPPORT	Rail system for shims	
BUMPER FRONT	• None	1" Boston bumper (specify color)
		1" Stainless steel plate rail bumper
COUNTERTOP SURFACE	Stainless steel	• 3 cm. Quartz
REAR STORAGE	Non-refrigerated rear storage (w/o	Non-refrigerated rear storage w/ sliding doors
	doors)	Refrigerated rear storage w/ sliding doors
SNEEZE GUARD	Clear lift-up sneeze guard glass w/	
	stainless steel posts	
ELECTRICAL CONNECTION	Electrical leads (remote)	
REFRIGERATION	• Remote DX refrigeration	• Remote w/thermostat, solenoid & TXV
SENSOR	• None	CPC discharge air sensor (remote)
MISCELLANEOUS		Second year parts & labor warranty

Std Notes: 1 - Read important notes for remote options


Option Notes: 1 - Read important notes for remote options


Structural Concepts

DELIVERING FRESH. ALWAYS.™

Intended Environment: Type I - Designed to operate in ambient conditions of 75°F with 55% relative humidity unless noted otherwise in system information below.					
Zone	Intended Product To Be Displayed	Warmest Avg Prod Temp ° F			
1	Unpackaged refrigerated products	40			


PLAN VIEW



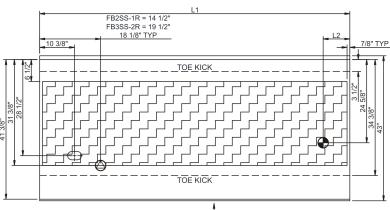

CASE FRONT

SIDE VIEW

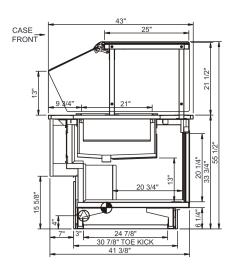

NOTE: ALL DIMENSIONS APPROXIMATE

ELECTRICAL JUNCTION BOX (SUPPLIED WITH 6" LEADS OR POWER CORD). REMOTE FLOOR SINK & UTILITIES ACCESS AREA.

ONLY (SUPPLIED WITH 3/4" OR 11/2" PVC TUBE). REFRIGERATION LINE CONNECTION.

SELF-CONTAINED CASE SERVICE ACCESS AREA.

DRY CASE SERVICE ACCESS AREA.

Model Technical Specifications																
Model	L"	L1"	L2"	Syste	m Circuit Volts		Phs	Freq	Amps	Watts	Wires	NEMA Plug	SST	Conv. Rack BTUH	Para. Rack RTUH	Est Wt
FB3SS-2R	N/A	40.00	7.88	Remote (DX)	Circuit #1	110-120	1	60	1.76	68	2+G	Leads Multiple	20.00	1123	1040	600
FB4SS-3R	N/A	53.00	7.88	Remote (DX)	Circuit #1	110-120	1	60	1.87	99	2+G	Leads Multiple	20.00	1296	1200	750
FB6SS-4R	N/A	66.00	7.88	Remote (DX)	Circuit #1	110-120	1	60	2.67	116	2+G	Leads Multiple	20.00	1469	1360	1,100

*** Does not include electric defrost on freezer models

Regulatory Ap	provals:
A 11 A 4 1 1	

Accordance with AHRI Std 1200 All Models ETL Listed to UL 471

> ETL Listed to CAN/CSA 22.2 No. 120 ETL Sanitation to NSF/ANSI 7





Important Notes:

- 1) REMOTE REFRIGERATION NOTE: Condensing unit not included, floor drain required.
- 2) ELECTRICAL NOTE: If GFCI is required, a GFCI breaker MUST be used in lieu of a GFCI receptacle

▲ WARNING: This product can expose you to chemicals, including Urethane (Ethyl Carbamate), which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.

21876252