

DSLHRI Roll-Ins

Heated Roll-In

Models

DSLHRI1-S

DSLHRI2-S



DSLHRI1-S

Standard Features

- Stainless steel exterior and interior
- easyTouch Control with remote monitoring capability
- Stay-open door feature for easy product loading and unloading
- Stainless steel door(s)
- Door activated interior LED light
- Heavy-duty cylinder lock
- Stainless steel interior door liner
- One piece, snap-in door gaskets
- Stainless steel breaker caps
- 3 silver freeze wire shelves
- 8' cord and plug
- Adjustable Electronic Temp Control From 80°F To 180°F
- Built-In, Adjustable Humidity Control Vent
- Safety Shielded Strip Type Heating Elements
- Externally Mounted Blower Maintains Even Temperatures
- Accepts Carts: 26 1/2" w x 28" D x 65" H (cart not included)
- Three year parts and labor warranty and an additional 4 year compressor parts warranty.

Options & Accessories

- Stainless Steel Back And Shroud
- Door Swing Orientation (at time of order)
- Exterior Door Laminate
- Correctional Package

DSLHRI Heated Roll-Ins


Specifications

Heating system: Cabinets are designed to maintain temperatures between 80°F - 180°F. Units are heated with two bottom-mounted heating elements per section. The externally mounted blower allows for full use of interior cabinet while maintaining even temperatures. System is controlled using an electronic temperature control.



DSLHRI Heated Roll-Ins

DSLHRI2-S

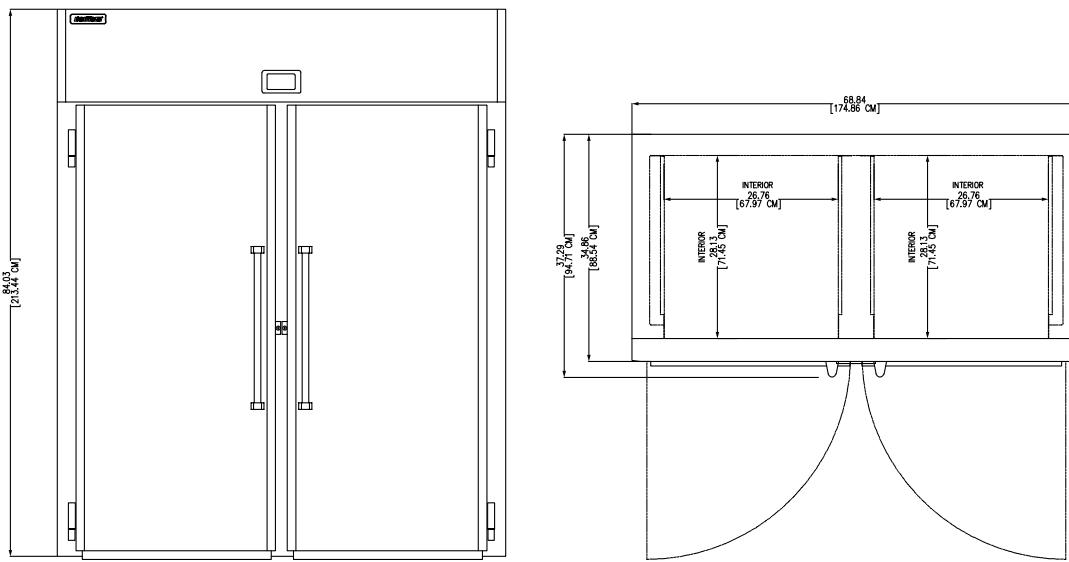

Specifications

Model	V/Hz/Ph	Amps	Volume Cu. Ft.	SHELF CAPACITY SQ. FT.	No. of Shelves	Heater Watts	Ship Weight	Nema Plug
DSLHRI1-S	208-240/60/1	6.8	33.6	N/A	N/A	1500	355	6-20P
DSLHRI2-S	208-240/60/1	13	67.2	N/A	N/A	3000	560	6-20P

Welbilt reserves the right to make changes to the design or specifications without prior notice.