



HIGH TEMPERATURE GLASSWASHER
PKHT24



JOB	
AREA	
ITEM NO.	
MODEL NO.	

MODELS
PKHT24

KEY PRODUCT FEATURES AND BENEFITS

- Removes lipstick and other residue for the cleanest glasses
- All stainless steel construction with 16-gauge stainless steel wash tank
- Cleans and sanitizes 600 glasses per hour or 30 racks (20 glasses per 20 x 20 rack)
- Uses only .75 gallons of water per cycle
- Booster heater increases the hot water temperature by 70°F for the three-minute rinse cycle
- Detergent and rinse chemical pumps
- Fresh water rinse through upper and lower arms – rotating arms provide maximum glass surface coverage

Quick Features:

- Removable stainless steel pump protection screen for easy cleaning
- Large 11-1/4-inch door opening and raised wash chamber to reduce bending over to remove racks
- Top-mounted controls for easy operation and temperature monitoring
- Comes standard with 6-inch legs to raise height; 4-inch legs available as an option

Note: Some US States may require Energy Star ratings for Commercial Dishwashers. The specifier or installer is responsible for knowing their local codes, standards, and regulatory requirements. This product was certified and met the requirements of previous Energy Star Version 2.0 for commercial dishwashers as required by some states.

Form No. Z2842
Rev. 02.28.23




HIGH TEMPERATURE GLASSWASHER
PKHT24

MODEL NOS.		PKHT24
DIMENSIONS: EXTERIOR (mm)	Depth	25" (635)
	Width	24" (610)
	Height	33-1/4" (845)
	Maximum Clearance For Dishes	11-1/4" (286)
	Weight Lbs. (kg)	234 (106)
ELECTRICAL RATING* Must connect to 50 amp supply circuit.	Volts / Hz	208 U.S./230 Metric / 1 PH-60 Hz
	Total Amps	33
	Booster Heater KW	5.3 kw U.S./ 6.5 kw Metric
WATER CONSUMPTION, GALLONS (LITERS)	Per Rack	.75 (2.83)
	Per Hour	17.9 (67.6)
OPERATING CYCLE	Wash Time, Seconds	94
	Sanitizer Time, Seconds	16
	Dwell Time, Seconds	10
	Total Cycle Time	2 Minutes
OPERATING CAPACITY	Glasses per Hour	600
	Wash Tank Capacity, Gallons (lt)	2.5 (9.46)
	Pump Capacity, Gallons per Minute (lt)	38 (144)
WATER REQUIREMENTS	Required Minimum Temperature*	110°F (43°C)
	Recommended Temperature**	140°F (60°C)
	Water Inlet, Inches (cm)	1/2 NPTM (127)
	Drain Connection, Inches (cm)	1 (254) IPS PVC socket to include an air gap
	Rinse Pressure Set	20 +- 5psi / (1.41 kg/cm ²)
CYCLE TEMPERATURES	Wash	150-160°F (65.5-71°C)
	Rinse	180-195°F (82-90°C)
WASH PUMP MOTOR	1/5 HP	
ENERGY STAR RATING	2.0	
AVAILABLE OPTION	Second year extended parts and labor warranty (includes one (1) year parts and labor warranty)	

NOTE: This system requires three power wires, which includes a current-carrying neutral wire. An additional fourth wire must be provided for grounding the machine.

* For machine having Safety-Temp feature

** For faster heat recovery

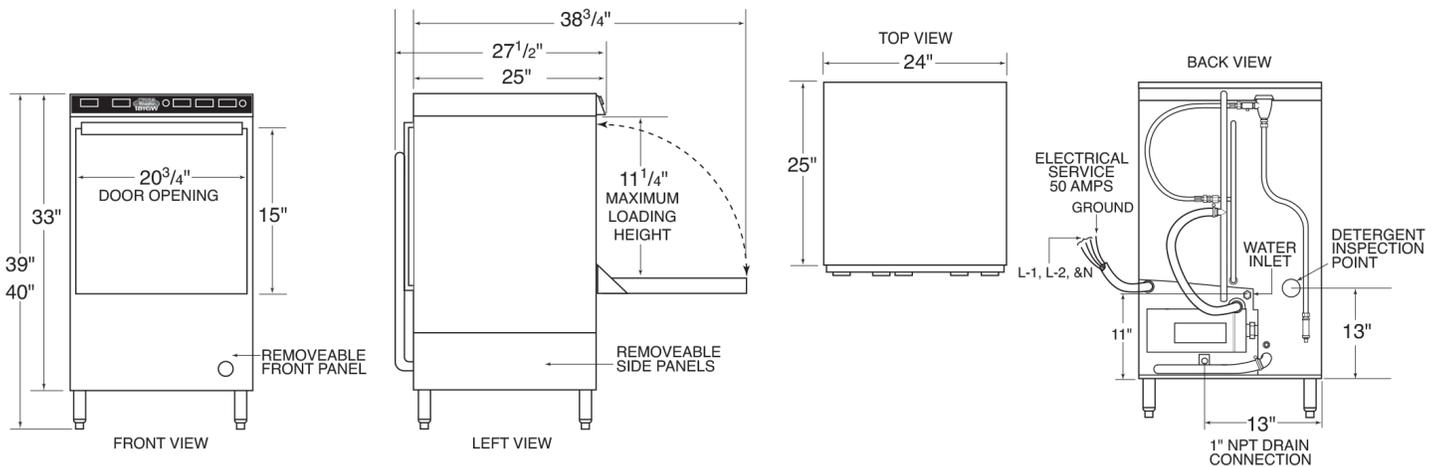

Warning: Electrical and plumbing connections must be made by a qualified service person who complies with all federal, state and local health, electrical, plumbing and safety codes.

Form No. Z2842
Rev. 02.28.23