



Your Solutions Partner

Specifications

F.O.B. Sedalia, Missouri 65301



EP-3-CBPG

OPTIONS:

- ☐ 14 gauge tops
- ☐ Adaptor plates
- ☐ 3-phase wiring
- ☐ 6', 8' or 10' Cord and plug
- ☐ Sliding Doors
- ☐ Veneered plastic laminate panels on body
- ☐ Powder coat paint in 12 colors
- ☐ Tray slides
- ☐ Work shelves
- ☐ 34" ADA height (units finish at 33.5"). Adjustable height casters with 5/8" adjustability allow leveling to 34"

AGENCY LISTINGS:



DUKE MANUFACTURING CO.
2305 N. Broadway
St. Louis, MO 63102
800.735.3853 Toll Free
314.231.5074 Fax
www.dukemfg.com

Approval Stamp(s):

PRODUCT INFORMATION:

PROJECT: _____

ITEM: _____

QUANTITY: _____

MODEL:

Thurmaduke® Steamtables

Hot Food Units - Electric - Standard

- ☐ EP-3-CBPG/EP-3-CBSS 3 top openings
- ☐ EP-4-CBPG/EP-4-CBSS 4 top openings
- ☐ EP-5-CBPG/EP-5-CBSS 5 top openings
- ☐ EP-6-CBPG/EP-6-CBSS 6 top openings

TOP:

- 16 gauge 300 Series stainless steel
- Top openings die-stamped. 11 7/8" x 19 7/8"
- Stainless steel carving surface – drop brackets

HEAT COMPARTMENTS:

- 6 1/2" deep Sealed wells with drains
- Wet or Dry operation
- Fully Insulated Wells
- Copper manifolds and brass master valve
- ☐ 750 or 1200 watt elements
- ☐ 120, 208 or 240 volt A/C
- ☐ Master Toggle Switch w/ indicator light for entire unit
- Single Phase standard
- 6' heavy duty cord and plug

BODY AND INTERIOR SHELF:

- ☐ Stainless Steel body
- ☐ Painted body w/ choice of 12 powder coat colors
- ☐ Stainless or Painted sliding doors
- Stainless Steel Front Panel w/ control knobs
- Wire knob guards
- Full bottom shelf to match body
- 5" diameter casters w/ locks
- 2-1/2" wide heavy-duty polyvinyl bumper around base of unit
- 14 Ga. Stainless steel channels frame for bumper

Specification subject to change




WARNING For CA residents: go to www.dukemfg.com/prop65 for prop 65 warning


THURMADUKE® STEAMTABLES - HOT FOOD - ELECTRIC - PORTABLE

Catalog No. TST-PORTELEC


A.I.A. File No. 35-C-13

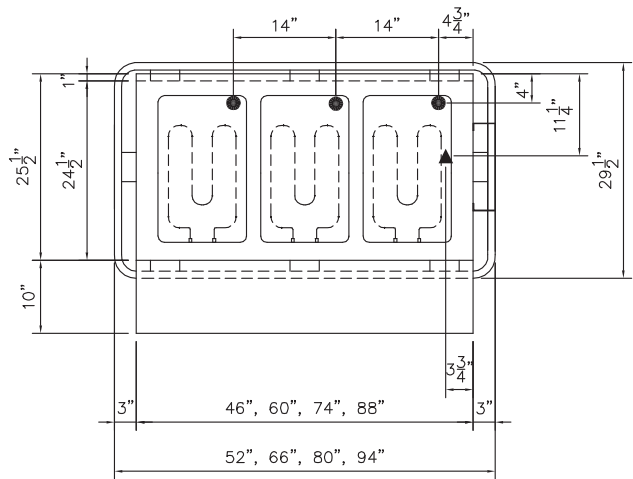

TOP VIEW

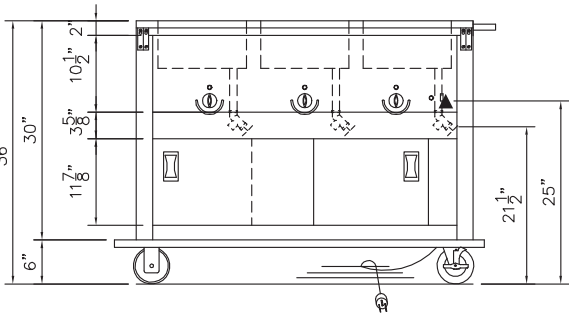

FRONT VIEW



RIGHT SIDE VIEW

LEGEND	
▲	ELECTRICAL CONNECTION
●	DRAIN LOCATION

DIMENSIONS:

FREIGHT CLASS: 150

Model		Length		Width		Height		Top Open-ings	Cube ft. Crated	Weight	
Enameled	Stainless	in	cm	in	cm	in	cm			lbs	kg
EP-3-CBPG	EP-3-CBSS	46	116.8	35-1/2	90.2	36	91.4	3	39.6	345	156.8
EP-4-CBPG	EP-4-CBSS	60	152.4	35-1/2	90.2	36	91.4	4	51.2	420	190.9
EP-5-CBPG	EP-5-CBSS	74	188.0	35-1/2	90.2	36	91.4	5	62.3	505	229.6
EP-6-CBPG	EP-6-CBSS	88	223.5	35-1/2	90.2	36	91.4	6	74.3	605	275.0

ELECTRICAL SPECIFICATIONS:

Model 750W	120 Volt - 750W			208 Volt - 750W			240 Volt - 750W		
	Watts	Amps	NEMA	Watts	Amps	NEMA	Watts	Amps	NEMA
EP-3-CBPG/SS	2250	18.8	L5-30	2250	10.8	6-20	2250	9.4	6-20
EP-4-CBPG/SS	3000	25.0	5-50	3000	14.4	6-20	3000	12.5	L6-30
EP-5-CBPG/SS	3750	31.3	5-50	3750	18.0	L6-30	3750	15.6	L6-30
EP-6-CBPG/SS	N/A			4500	21.6	L6-30	4500	18.8	L6-30

Model 750W	120V 01200W			208V 1200W			240V 1200W		
	Watts	Amps	NEMA	Watts	Amps	NEMA	Watts	Amps	NEMA
EP-3-CBPG/SS	3600	30	5-50	3600	17.3	L6-30	3600	15	6-20
EP-4-CBPG/SS	N/A			4800	23.1	L6-30	4800	20	L6-30
EP-5-CBPG/SS	N/A			6000	28.9	6-50	6000	25	6-50
EP-6-CBPG/SS	N/A			7200	34.6	6-50	7200	30	6-50



Duke Manufacturing Co.
2305 N. Broadway
St. Louis, MO 63102

Phone: 314-231-1130
Toll Free: 1-800-735-3853
Fax: 314-231-5074

www.dukemfg.com