



HEAVY DUTY REFRIGERATED COLD WELL TABLES WITH ENCLOSED BASE



Intertek



Intertek

Enclosed Base
HDRCP-3-BS Shown
with Optional TA-255P Casters

Item #: _____ Qty #: _____
Model #: _____
Project #: _____

NOTE: Units are not designed to cool foods originally warm. Food should already be chilled to maintain the proper temperatures

FEATURES:

Heavy duty construction
All welded 300 series stainless steel
High nominal cooling capacity for consistent product temperature control
Aluminum encased copper tube evaporator panels improve heat transfer by increasing contact area
This increases operating efficiency and reduces power consumption
Expansion valve for efficient operation at various temperature conditions
Refrigerant filter drier to insure cleanliness of sealed refrigeration circuit
Sight glass to insure a properly charged refrigeration system
Liquid receiver for improved refrigerant charge control
Low running current suitable for any 115 volt circuit
Precision electronic thermostat for exact temperature control
Includes adapter bars for use with standard 12" x 20" pans
Stainless steel shelf with removable 3/8" thick poly cutting board
- Ships K.D.

For Mobile Units:

SU-25 - 5" swivel casters, two with brakes
Universal mount push handle (right/left) on mobile units

MATERIAL:

TOP: 18 gauge, #304 stainless steel, with black polyethylene thermal breaker marine edge

BODY: 18 gauge #304 stainless steel

LINER: Constructed of 18 gauge, 304 stainless steel, with 3" recessed top, one piece construction, all welded, ground and polished to a uniform finish. All corners are covered with a 1/4" radius. Liner is pitched towards a 1" I.P.S. drain

CUTTING BOARD: White Thermoplastic

LEGS: 16 gauge stainless steel with full adjustable stainless steel bullet foot

REFRIGERATION SYSTEM: The compressor is housed in a 16 gauge galvanized under structure, fabricated from formed angles and bolted to the galvanized jacket. The fully self contained condensing unit is provided with a hermetically sealed compressor with a digital, programmable thermostat. The system is fully charged with environmentally friendly R290 refrigerant

ELECTRICAL:

Unit will be wired for 15 amps, 120V single phase operation with an on/off thermostat switch

2-3 well Units: 115 V, 8 AMPS, 60 Hz, 1/5 HP

4-6 well Units: 115 V, 8 AMPS, 60 Hz, 1/3 HP

Includes 8 ft. long, 3 wire cord with a NEMA 5-15P plug

Model	Length (L)	Width* O.A.	Inside Well Dim (A x B)	Drain Distance (C & D)	Refrigerant	Wt (lbs.)	Cu. Ft.
HDRCP-2-BS	31-13/16"	36.25"	28.75" x 22"	4.51" x 27.356"	R290	320	24
HDRCP-3-BS	47-1/8"	36.25"	42.25" x 22"	5.465" x 41.715"	R290	420	36
HDRCP-4-BS	62-1/2"	36.25"	55.75" x 22"	6.371" x 56.121"	R290	510	50
HDRCP-5-BS	77-3/4"	36.25"	69.25" x 22"	7.277" x 70.527"	R290	568	62
HDRCP-6-BS	93-1/8"	36.25"	82.75" x 22"	8.183" x 84.933"	R290	633	74

***Width Includes 8" Cutting Board**



SU-P-234 - 6' with
NEMA 5-15 plug Included

OPTIONAL CASTERS

Visit our website for additional
Food Table Accessories



SU-26

WARNING: Refrigerated Equipment on this page may expose you to chemicals, including Ethanes, that are known to the State of California to cause cancer or birth defects or other reproductive harm. For more Info., visit www.p65warnings.ca.gov.



Customer Service Available To Assist You 1-800-645-3166 8:30 am - 7:00 pm E.S.T.

For Orders & Customer Service:

Email: customer@advancetabco.com or Fax: 631-242-6900




For Smart Fabrication™ Quotes:

Email: smartfab@advancetabco.com or Fax: 631-586-2933

DIMENSIONS and SPECIFICATIONS

TOL ± .125"

ALL DIMENSIONS ARE TYPICAL

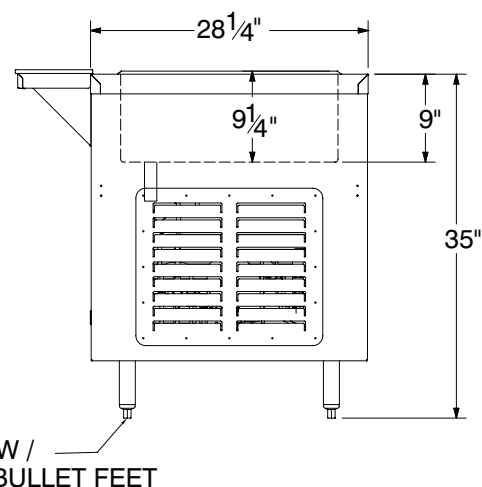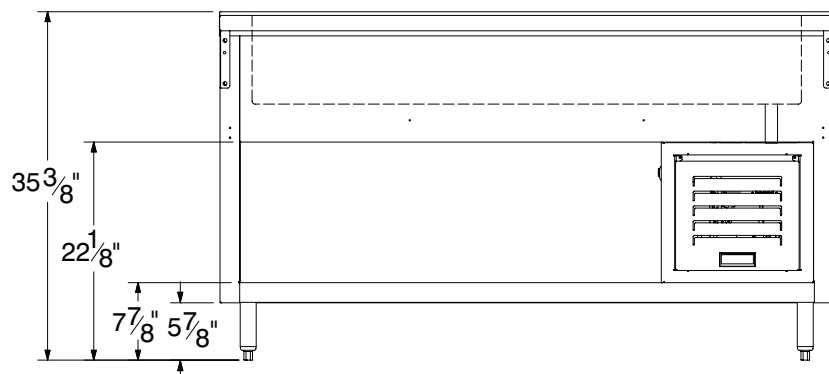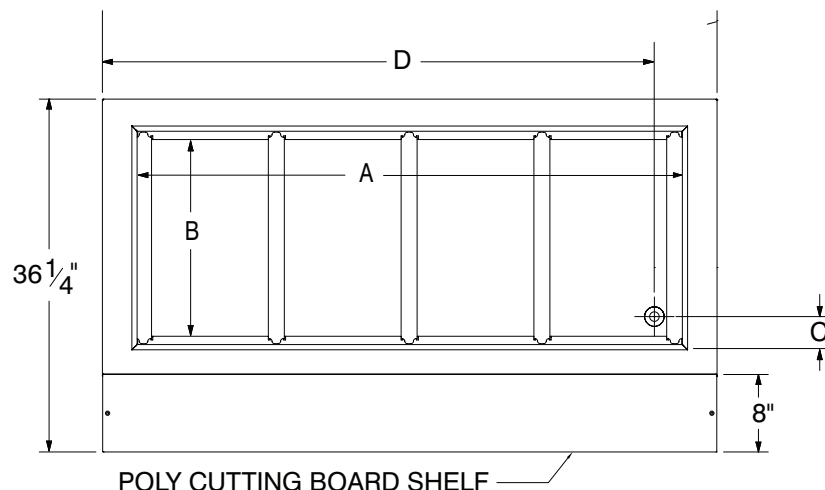

Food Table Shelving & Accessories

Visit our website for additional accessories



**Double Sided
Self-Serve Buffet Shelf
with Built-In Food Shield**

Model	Length	Approx Wt.	Cu. Ft.
TBS-2	31-13/16"	34 lbs.	2
TBS-3	47-1/8"	42 lbs.	3
TBS-4	62-7/16"	47 lbs.	4
TBS-5	77-3/4"	55 lbs.	4
TBS-6	93-1/8"	63 lbs.	4



**Acrylic Side Panels
for Buffet Shelf**

Add side panels to meet additional NSF requirements (2 panels per end)

**TBP-1 One End
TBP-2 Two Ends**

Field Installation Available



**Single Sided
Cafeteria Shelf
with Built-In Food Shield**

Model	Length	Approx Wt.	Cu. Ft.
TSS-2	31-13/16"	18 lbs.	2
TSS-3	47-1/8"	23 lbs.	3
TSS-4	62-7/16"	30 lbs.	4
TSS-5	77-3/4"	35 lbs.	4
TBS-6	93-1/8"	41 lbs.	4



**Acrylic Side Panel
for Serving Shelf**

Add side panels to meet additional NSF requirements. (1 panel per end)

**TSP-1 One end
TSP-2 Two Ends**

Field Installation Available



325 Wireless Boulevard, Hauppauge, NY 11788

ADVANCE TABCO is constantly engaged in a program of improving our products. Therefore, we reserve the right to change specifications without prior notice.

© ADVANCE TABCO, SEPTEMBER 2025