

• FLP72

74-1/4"L x 43"D x 52-5/8"H



FLP72

### Included


- 8" X 13" Buckets
- Digital fahrenheit thermometer
- Levelers (only)
- One year parts & labor warranty
- Solid back panel, galvanized

Specify	Standard Features	Additional Options
EXTERIOR COLOR	<ul style="list-style-type: none"> <li>• Powder coated Silversan Black</li> </ul>	<ul style="list-style-type: none"> <li>• Laminate (stock/non-stock colors)</li> <li>• Powder coated (stock/non-stock colors)</li> </ul>
INTERIOR COLOR	<ul style="list-style-type: none"> <li>• Powder coated Silversan Black</li> </ul>	
LOWER FRONT PANEL COLOR	<ul style="list-style-type: none"> <li>• Powder coated Silversan Black</li> </ul>	<ul style="list-style-type: none"> <li>• Powder coated (stock/non-stock colors)</li> </ul>
BASE SUPPORT	<ul style="list-style-type: none"> <li>• Levelers</li> </ul>	<ul style="list-style-type: none"> <li>• Rail system for shims</li> </ul>
BUMPER FRONT	<ul style="list-style-type: none"> <li>• None</li> </ul>	<ul style="list-style-type: none"> <li>• 1" Boston bumper (2 rows), black</li> </ul>
END PANELS	<ul style="list-style-type: none"> <li>• Full end panel w/mirror interior</li> </ul>	<ul style="list-style-type: none"> <li>• Cutaway w/ glass</li> </ul>
SHELVING	<ul style="list-style-type: none"> <li>• 13"H x 8"Dia Buckets</li> </ul>	<ul style="list-style-type: none"> <li>• 10"H x 9"Dia Buckets</li> <li>• 10"H x 9"Dia Buckets - Fixed in place</li> <li>• Glass shelves w/ 13"H buckets</li> </ul>
REFRIGERATION	<ul style="list-style-type: none"> <li><sup>1</sup> • Remote DX refrigeration</li> </ul>	
MISCELLANEOUS		<ul style="list-style-type: none"> <li>• Second year parts &amp; labor warranty</li> </ul>


**Std Notes:** 1 - Read important notes for remote options

<b>Intended Environment:</b> Type I - Designed to operate in ambient conditions of 75°F with 55% relative humidity unless noted otherwise in system information below.		
<b>Zone</b>	<b>Intended Product To Be Displayed</b>	
1	Floral products	<b>Warmest Avg Prod Temp °F</b>
	40	

PLAN VIEW

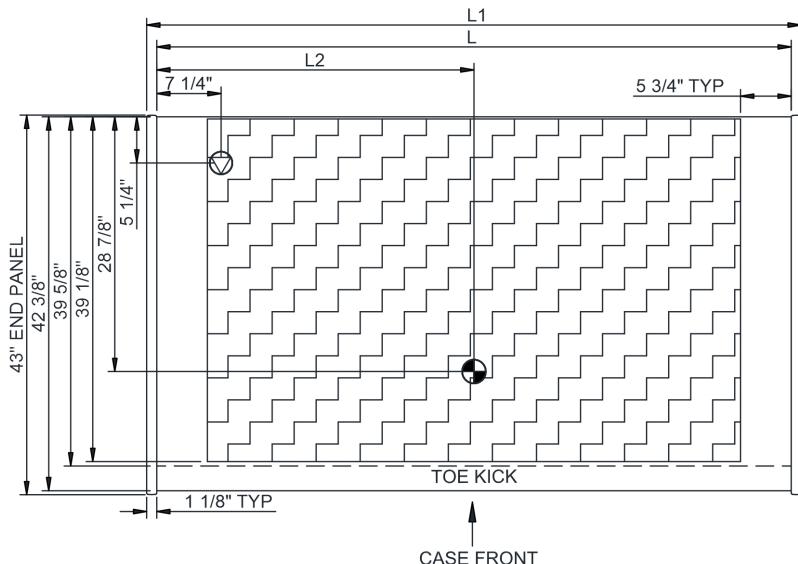

SIDE VIEW

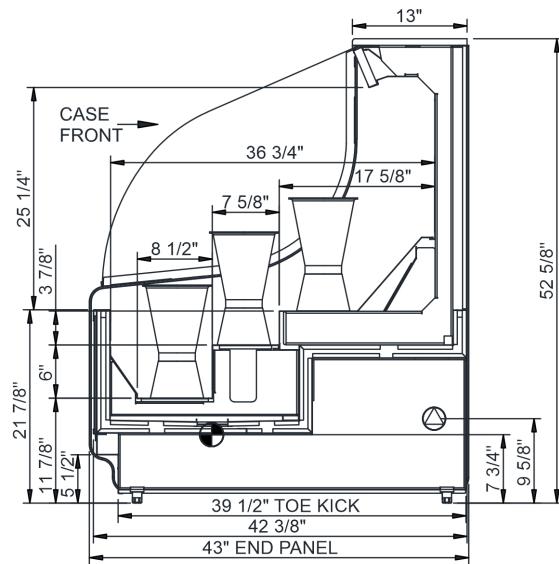

NOTE: ALL DIMENSIONS APPROXIMATE



ELECTRICAL JUNCTION BOX  
(SUPPLIED WITH 6" LEADS OR POWER CORD).



LOCATION OF DRAIN TUBE FOR REMOTE REF.  
ONLY (SUPPLIED WITH 3/4" OR 1 1/2" PVC TUBE).



REFRIGERATION LINE CONNECTION.



REMOTE FLOOR SINK & UTILITIES  
ACCESS AREA.



SELF-CONTAINED CASE SERVICE ACCESS AREA.



DRY CASE SERVICE ACCESS AREA.

### Model Technical Specifications

Model	L"	L1"	L2"	System Circuit Volts	Phs	Freq	Amps ***	Watts	Wires	NEMA Plug	SST	Conv. Rack BTUH	Para. Rack BTUH	Est Wt		
FLP72	72.00	74.25	36.00	Remote (DX)	Circuit #1	110-120	1	60	1.17	96	2+G	Leads Multiple	20.00	7206	6672	868

\*\*\* Does not include electric defrost on freezer models.

#### Regulatory Approvals:

All Models	Accordance with AHRI Std 1200 ETL Listed to UL 471 ETL Listed to CAN/CSA 22.2 No. 120
------------	---



In Accordance with  
**AHRI Std 1200**

**DOE 2017**  
Energy Efficiency  
Compliant

#### Important Notes:

- 1) REMOTE REFRIGERATION NOTE: Condensing unit not included, floor drain required.
- 2) 44" minimum door entry clearance required (without shipping skid) for standard depth unit.
- 3) 49" minimum door entry clearance required (without shipping skid) for unit with rear chimney vent option.
- 4) Keep unit at least 15' from exterior doors, 10' from overhead HVAC vents, 5' from exterior windows.
- 5) Units must be shimmed during installation to ensure the unit is level and plumb.
- 6) Performance issues (product temperatures, water on floor, etc) caused by adverse conditions are not covered by warranty.

**WARNING:** This product can expose you to chemicals, including Urethane (Ethyl Carbamate), which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).