




Your Solutions Partner

Specifications

F.O.B. Sedalia, Missouri 65301

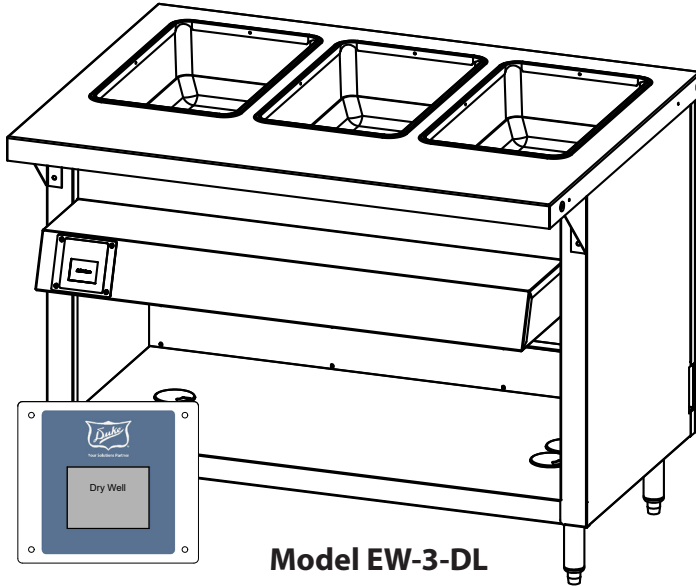

Model EW-3-DL

OPTIONS:

- ☐ 14 gauge tops
- ☐ 1/2" poly cutting surface added to integral top
- ☐ Backsplash
- ☐ Recessed top (to accommodate griddles, fryers, etc.)
- ☐ Adaptor plates
- ☐ 3-phase wiring
- ☐ Optional outlet for overhead LED light
- ☐ 6', 8' or 10' Cord and plug
- ☐ Heated base module
- ☐ Electric outlet in base
- ☐ Sliding Doors
- ☐ Pass-thru construction
- ☐ Veneered plastic laminate panels on body
- ☐ Powder coat paint in 12 colors
- ☐ Casters (add cord and plug), 5" swivel with locks
- ☐ Food shields
- ☐ Tray slides
- ☐ Work shelves
- ☐ Customer side Kickplates - Stainless steel or Painted
- ☐ 34" ADA height (units finish at 33.5"). Adjustable height casters with 5/8" adjustability allow leveling to 34"

DUKE MANUFACTURING CO.

2305 N. Broadway

St. Louis, MO 63102

800.735.3853 Toll Free

314.231.5074 Fax

www.dukemfg.com

Approval Stamp(s):

PRODUCT INFORMATION:

PROJECT: _____

ITEM: _____

QUANTITY: _____

MODEL:

Thurmaduke® Ganged Waterless Well
Hot Food Units - Electric - Deluxe

- | | |
|--|----------------|
| ☐ EW-2-DLPG/EW-2-DLSS | 2 top openings |
| ☐ EW-3-DLPG/EW-3-DLSS | 3 top openings |
| ☐ EW-4-DLPG/EW-4-DLSS | 4 top openings |
| ☐ EW-5-DLPG/EW-5-DLSS | 5 top openings |
| ☐ EW-6-DLPG/EW-6-DLSS | 6 top openings |

TOP:

- 16 gauge, 300 Series stainless steel
- Top openings die-stamped. 11 7/8" x 19 7/8"
- Integral carving/work surface

Heat Compartments:

- 6 1/2" deep wells Dry operation only
- Includes Silicone bottom pad
- Fully Insulated wells
- Rope Element in each compartment
- ☐ 120, 208 or 240 volt A/C
- Single Phase standard

BODY AND INTERIOR SHELF:

- ☐ Stainless Steel body
- ☐ Painted body w/ choice of 12 powder coat colors
- Full bottom shelf to match body
- 6" polished stainless steel adjustable legs

INTEGRAL DISHSHELF:

- Heavy gauge, one piece stainless steel - 8-1/2" wide

CONTROLS:

- Standard intuitive, easy to use touch screen control – One control for all wells
- Easily adjusted presets LOW/MED/HIGH
- Built in WIFI and Bluetooth for future connectivity

AGENCY LISTINGS:





Specification subject to change






WARNING For CA residents: go to
www.dukemfg.com/prop65 for prop 65 warning

Thurmaduke®


Ganged Waterless Well Deluxe

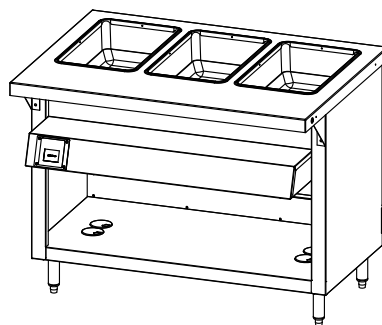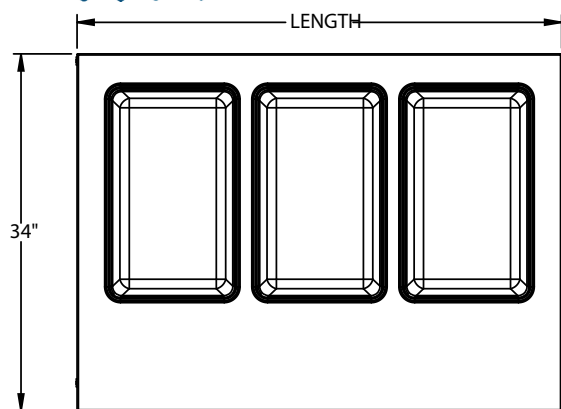

Control Specifications

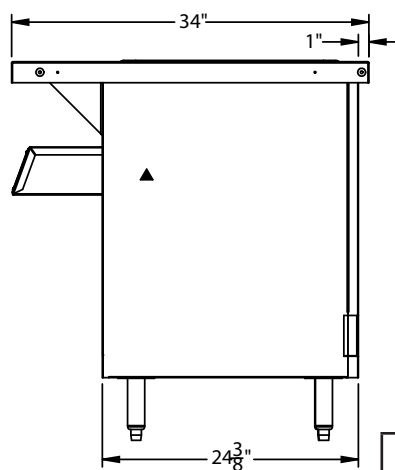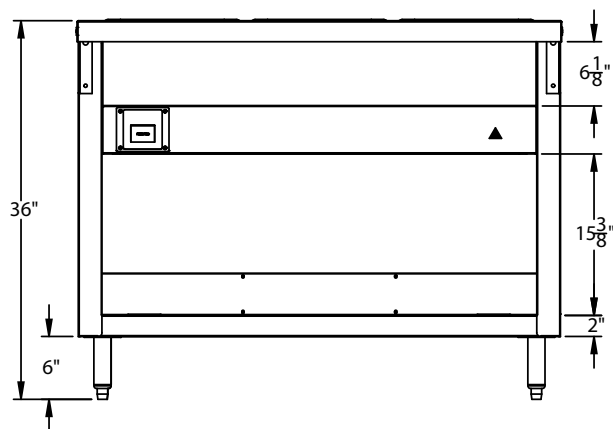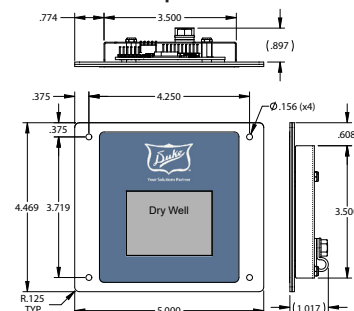

Control Cutout

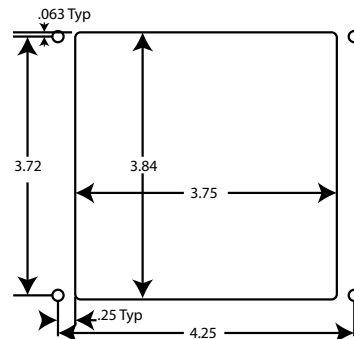

LEGEND

▲ ELECTRICAL CONNECTION

DIMENSIONS:

FREIGHT CLASS: 150

Model		Length		Width		Height		Top Openings	Cube ft. Crated	Weight	
Enameled	Stainless	in	cm	in	cm	in	cm			lbs	kg
EW-2-DLPG	EW-2-DLSS	32	81.3	34	86.4	36	91.4	2	27.0	255	115.9
EW-3-DLPG	EW-3-DLSS	46	116.8	34	86.4	36	91.4	3	38.1	335	152.3
EW-4-DLPG	EW-4-DLSS	60	152.4	34	86.4	36	91.4	4	49.2	410	186.4
EW-5-DLPG	EW-5-DLSS	74	188.0	34	86.4	36	91.4	5	60.2	495	225.0
EW-6-DLPG	EW-6-DLSS	88	223.5	34	86.4	36	91.4	6	71.3	595	270.5

ELECTRICAL SPECIFICATIONS:

Model	120V 665W			208V 500W			240V 665W		
	Watt	Amps	NEMA	Watt	Amps	NEMA	Watt	Amps	NEMA
EW-2-DLPG/SS	1414	11.8	5-15	1084	5.2	6-20	1414	5.9	6-20
EW-3-DLPG/SS	2083	17.4	L5-30	1588	7.6	6-20	2083	8.0	6-20
EW-4-DLPG/SS	2748	22.9	L5-30	2088	10	6-20	2748	11.5	6-20
EW-5-DLPG/SS	3417	28.5	5-50	2592	12.5	6-20	3417	14.2	6-20
EW-6-DLPG/SS	N/A			3092	14.9	6-20	4082	17.0	L6-30

Cord and NEMA plug NOT included



Duke Manufacturing Co.

2305 N. Broadway
St. Louis, MO 63102

Phone: 314-231-1130

Toll Free: 1-800-735-3853

Fax: 314-231-5074

www.dukemfg.com

Printed in U.S.A.

© 2025, Duke Manufacturing Co.