



Project Name: \_\_\_\_\_

Location: \_\_\_\_\_

Item #: \_\_\_\_\_ Qty: \_\_\_\_\_

Model: \_\_\_\_\_

## MEGATOP PREP TABLES

MODEL: ☐ MVR29MHC ☐ MVR48MHC ☐ MVR60MHC ☐ MVR72MHC



MVR29MHC



MVR48MHC



MVR60MHC



MVR72MHC


Maxx Cold V-Series Mega Prep tables offer additional pan space compared to standard sandwich/salad stations. Choose from 4 models offering storage from 7, 12, 15.5 and 18 cubic feet that accommodate 12, 18, 24 and 27 pans. Constructed of stainless steel, easy grip recessed handles, LED temperature display and equipped with a 9" deep cutting board our Mega Prep tables will streamline your food prep operations.

### FEATURES AND CONSTRUCTION

- Stainless steel exterior and powder coated aluminum interior construction
- Easy to grip recessed door handles
- Adjustable heavy-duty wire shelves (1 per section/door)
- Equipped with four (4) 3" swivel casters (two with brakes)
- Equipped with full set of clip-on divider bars and 4" deep plastic pans
- Equipped with 9" deep polyethylene cutting board
- Solid state digital control system
- LED temperature display
- Equipped with integrated condensate evaporator therefore no drain line connection is needed
- Urethane foam insulated walls and doors
- Accommodates full-size sheet pans

### ELECTRIC

115V / 60Hz / 1Ph  
(230V / 50-60Hz / 1Ph is available as an option)  
6' (2m) NEMA 5-15P cord set included



NEMA 5-15P

### 3RD PARTY APPROVALS



Intertek

Certified to ANSI NSF 7



Intertek

Certified to ANSI UL 471



Zero Ozone Depletion Potential



DOE 2017 Compliant

### NET STORAGE CAPACITY (Cu Ft & 1/6 Pans)


MVR29MHC	7 Cu Ft (198 L) / 12 Pans
MVR48MHC	12.8 Cu Ft (362 L) / 18 Pans
MVR60MHC	16.7 Cu Ft (473 L) / 24 Pans
MVR72MHC	19.6 Cu Ft (555 L) / 27 Pans

### TEMPERATURE

Holding temperature ..... 33°F to 41°F (1°C to 5°C)

- Solid-state controls and forced-air system deliver consistent, easily adjustable temperature performance

Contact Maxx Cold for warranty statement at  
TechnicalServices@TheLegacyCompanies.com or 877.368.2797

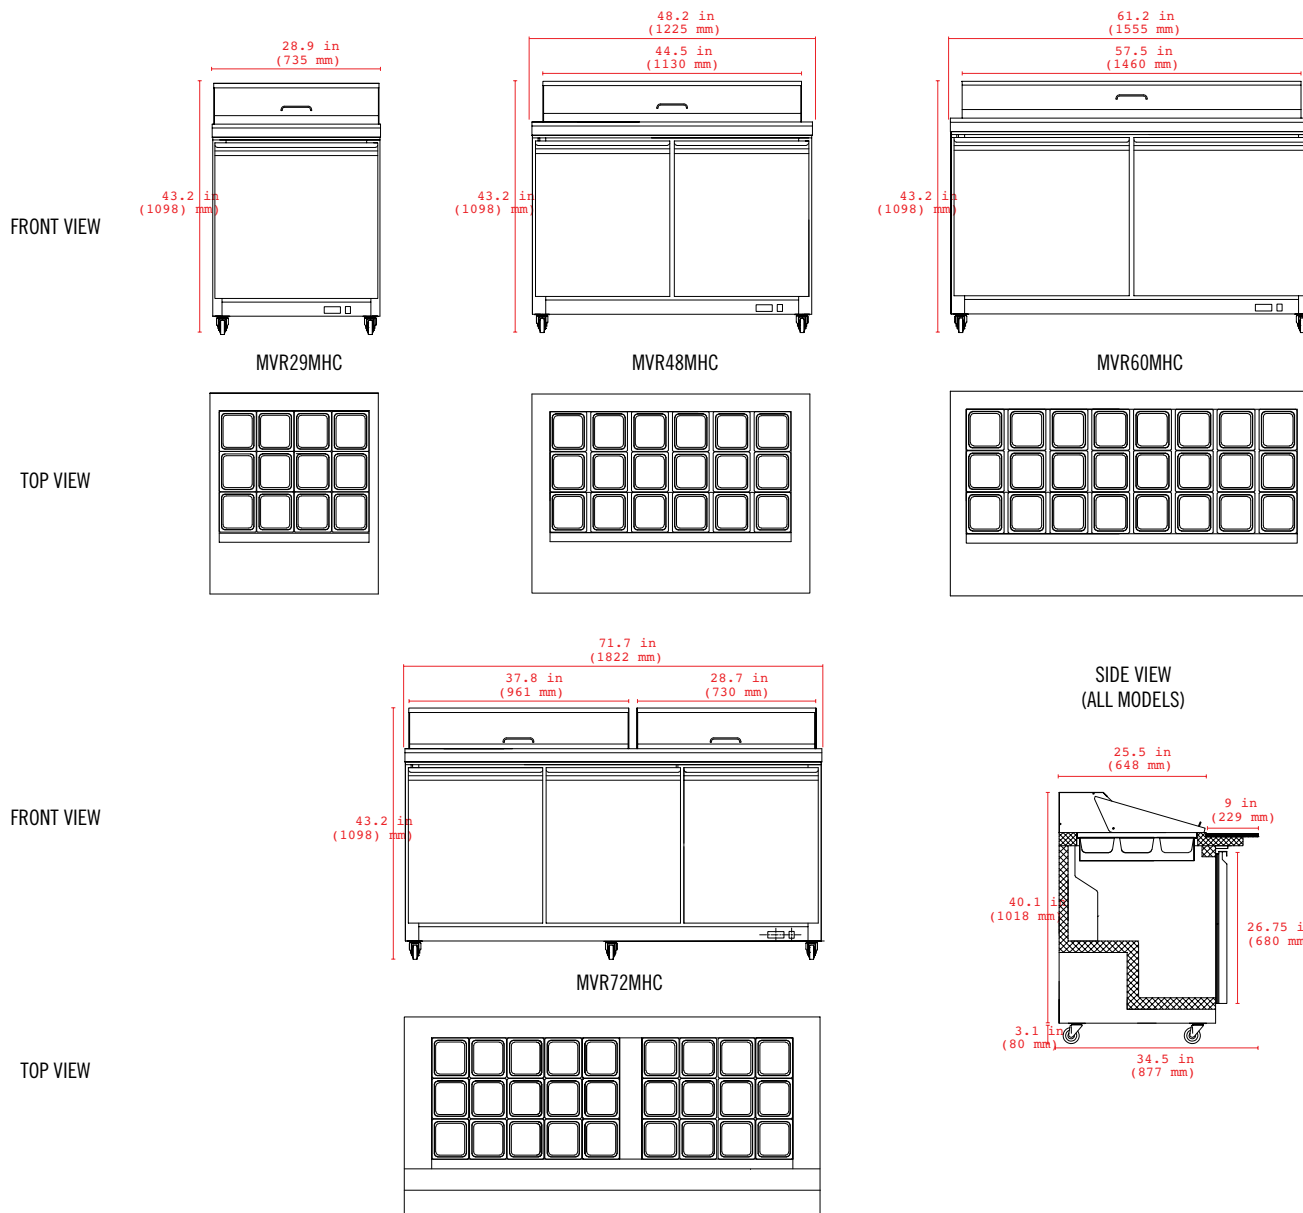

MODEL	EXTERNAL DIMENSIONS	INTERNAL DIMENSIONS	NET CAPACITY	HOLDING TEMPERATURE RANGE	AMP DRAW	SHIPPING WEIGHT	REFRIGERANT AND CHARGE SIZE	DOORS / SHELVES	PANS (1/6)	ELECTRICAL
MVR29MHC	29" x 35.125 x 47" (737 x 892 x 1194 mm)	22.9" x 18.8" x 24.5" (602 x 478 x 622 mm)	7 Cu Ft (198 L)	33°F to 40°F (1°C to 4°C)	2.9A	159 lbs (72 kg)	R290a 1.59 oz (45 g)	1 / 1	12	115V / 60Hz / 1Ph
MVR48MHC	48.4" x 35.125 x 47" (1229 x 892 x 1194 mm)	43.5" x 18.8" x 24.5" (1104 x 478 x 622 mm)	12.8 Cu Ft (362 L)	33°F to 40°F (1°C to 4°C)	3.4A	203 lbs (92 kg)	R-290a 2.29 oz (65 g)	2 / 2	18	115V / 60Hz / 1Ph
MVR60MHC	61.2" x 35.125 x 47" (1554 x 892 x 1194 mm)	56.2" x 18.8" x 24.5" (1428 x 478 x 622 mm)	16.7 Cu Ft (473 L)	33°F to 40°F (1°C to 4°C)	3.5A	243 lbs (110 kg)	R-290a 2.29 oz (65 g)	2 / 2	24	115V / 60Hz / 1Ph
MVR72MHC	72" x 35.125 x 47" (1829 x 892 x 1194 mm)	66.9" x 18.8" x 24.5" (1700 x 478 x 622 mm)	19.6 Cu Ft (555 L)	33°F to 40°F (1°C to 4°C)	5.2A	287 lbs (130 kg)	R-290a 3.35 oz (95 g)	3 / 3	27	115V / 60Hz / 1Ph

## INSTALLATION

- Shorter caster options are available to lower the overall height of the unit to satisfy ADA or other low profile requirements