



Item: _____

Quantity: _____

Project: _____

Solid State Thermostatic Griddle

Delux Series

Models: ☐ RDSAC-24 ☐ RDSAC-36 ☐ RDSAC-48 ☐ RDSAC-60 ☐ RDSAC-72



RDSAC-36

Gas Type: ☐ Natural ☐ LP

Elevation (if above 2000 ft.): _____

Standard Features

- Fully welded frame with lifetime warranty
- 1,200°F mineral wool insulation
- 24" cooking depth
- Safety pilot with electronic ignition
- 11" working height, perfect for refrigerated bases
- Large 1½ gallon capacity stainless steel grease can (2 ea on 60" & 72" units)
- Stainless steel sides and front valve cover
- Heavy duty Stainless Steel "U" shaped burner every 12" rated at 30,000 BTU/hr each
- Solid state control with sensor embedded in the plate
- Aeration panels between the burners for added efficiency
- 1" thick griddle plate with polished cooking surface
- 4" wide S/S grease trough with large drain opening for easy cleaning
- Stainless steel tubing for burners and pilots
- 4" high adjustable heavy duty legs included




Options and Accessories

- ☐ Grooved griddle (specify width: _____")
 - ☐ Chrome griddle plate
 - ☐ Belly Bar
 - ☐ Adapter for use on refrigerated base
 - ☐ Piezo Igniter - Manual Spark Ignition
 - ☐ Stainless Steel Equipment Stand
 - ☐ Knock Down ☐ All Welded
- Size**
- ☐ 24" ☐ 36" ☐ 48" ☐ 60" ☐ 72"
 - ☐ 5" swivel casters (set of four - 2 locking)
 - ☐ 5" swivel casters (set of six - 3 locking) (60" and 72" models)

LIMITED WARRANTY, TWO YEAR PARTS AND ONE YEAR LABOR



Solid State Thermostatic Griddle

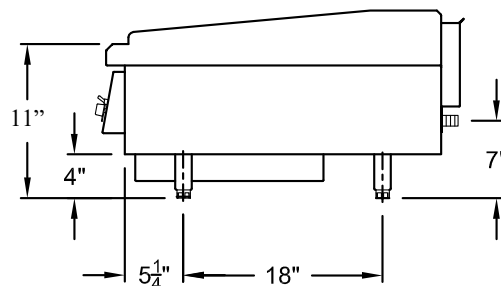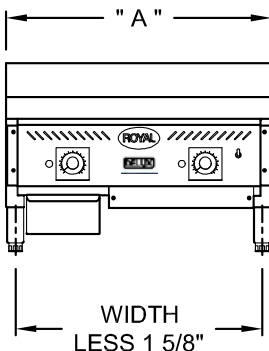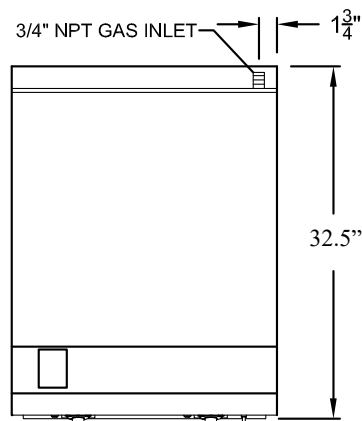

Model Number	Width (A)	Number of Thermostats	Number of Burners	Total BTU	Ship Weight
RDSAC-24	24"	2	2	60,000	265 lbs.
RDSAC-36	36"	3	3	90,000	375 lbs.
RDSAC-48	48"	4	4	120,000	490 lbs.
RDSAC-60	60"	5	5	150,000	605 lbs.
RDSAC-72	72"	6	6	180,000	725 lbs.

Notes:

Gas Connection:

3/4" NPT on the right hand rear of the appliance.

The pressure regulator (supplied) is to be connected by the installer.

Specify type of gas and altitude, if over 2,000 feet, when ordering.

Electrical: 120V, 60Hz, 1 phase, 1 amp

Provided with 6' power cord fitted with standard 3 prong grounded plug

Gas Pressure:

5" W.C.	Natural Gas
10" W.C.	Propane

Clearances:

	Combustible	Non-Combustible
Rear	6"	0"
Sides	4"	0"

Due to continuing product development to ensure best possible performance, these specifications are subject to change without prior notification.

Royal Range of California, Inc.

3245 Corridor Dr. • Eastvale, CA 91752 • (800) 769-2414 • (951) 360-1600

Fax: (951) 360-7500 • www.royalranges.com • sales@royalranges.com