




Your Solutions Partner

Specifications

F.O.B. Sedalia, Missouri 65301

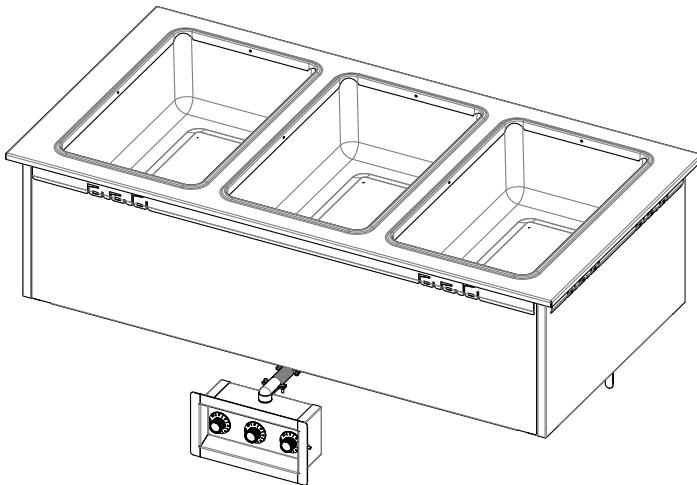

DI-2E-SW

OPTIONS:

- ☐ Hug Edge Top
- ☐ 3 phase power (except DI-1E-SW)
- ☐ 208V 900W Elements
- ☐ Individual valves
- ☐ Manifold drains
- ☐ Master valve
- ☐ Designer Foodshields
- ☐ Telescope covers
- ☐ Removable S/S carving station
- ☐ Adapter Plates
- ☐ Adapter Bars

Agency Listings:



DUKE MANUFACTURING CO.

2305 N. Broadway
St. Louis, MO 63102

800.735.3853 Toll Free

314.231.5074 Fax

www.dukemfg.com

SS-1127 Drop In Elec-Sealed Well

Specification subject to change



WARNING For CA residents: go to
www.dukemfg.com/prop65 for prop 65 warning

Approval Stamp(s):

PRODUCT INFORMATION:

PROJECT: _____

ITEM: _____

QUANTITY: _____

MODEL:

Drop-Ins - Hot Food Electric - Sealed Well

- | | |
|-----------------------------------|-----------------------------------|
| ☐ DI-1E-SW | 18 1/4" L x 24 1/4" W x 12 3/4" H |
| ☐ DI-2E-SW | 32 1/4" L x 24 1/4" W x 12 3/4" H |
| ☐ DI-3E-SW | 46 1/4" L x 24 1/4" W x 12 3/4" H |
| ☐ DI-4E-SW | 60 1/4" L x 24 1/4" W x 12 3/4" H |
| ☐ DI-5E-SW | 74 1/4" L x 24 1/4" W x 12 3/4" H |
| ☐ DI-6E-SW | 88 1/4" L x 24 1/4" W x 12 3/4" H |

TOP RIM:

- Heavy gauge, 300 Series stainless steel
- Overhang on front, back and ends w/ 90 degree turn downs and w/ locking tabs
- Die-stamped openings - 11 7/8" x 19 7/8"

HEAT COMPARTMENTS:

- ☐ 6-1/2" deep stainless steel liner, wet or dry operation
- ☐ Sealed element in each compartment
 - ☐ 750 watt
 - ☐ 1200 watt
- Individual open drains
- Fully insulated



CONTROL PANEL:

- Stainless steel face plate, plastic knobs
- Infinite switch controls in remote box
- 2 panels on units with 4, 5 or 6 wells
- UL approved



EXTERIOR HOUSING

- Heavy gauge paint grip steel

Drop-Ins - Hot Food Electric - Sealed Well

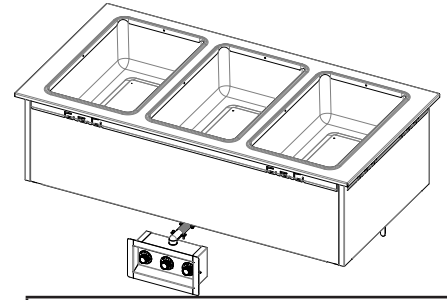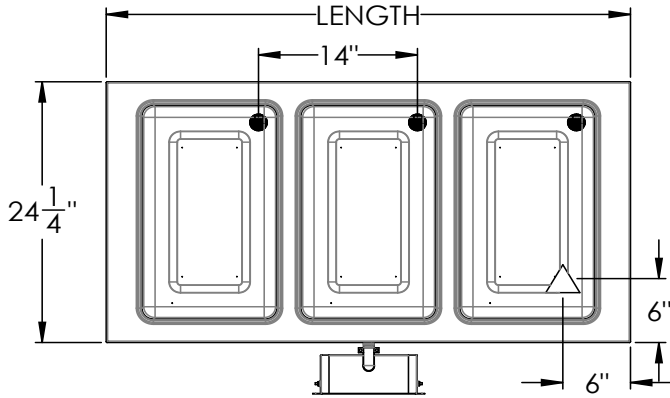

LEGEND	
▲	ELECTRICAL CONNECTION
"EP" = prefix denotes portable unit	

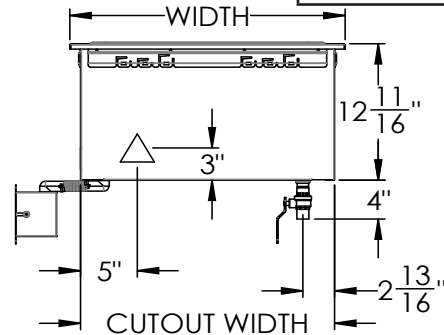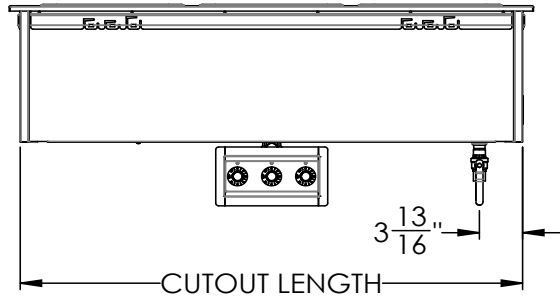

Dimensions:

Freight Class 100

Model	Length		Width		Height		Top Openings	Cutout Width		Cutout Length		Control Panels	Cube ft. Crated	Weight	
	in	cm	in	cm	in	cm		in	cm	in	cm			lbs	kg
DI-1E-SW	18 1/4	46.4	24 1/4	61.6	12 3/4	32.4	1	23.125	58.74	17.25	43.82	1	8.2	43	19.6
DI-2E-SW	32 1/4	81.9	24 1/4	61.6	12 3/4	32.4	2	23.125	58.74	31.25	79.375	1	13.0	75	34.1
DI-3E-SW	46 1/4	117.5	24 1/4	61.6	12 3/4	32.4	3	23.125	58.74	45.25	114.94	1	17.7	90	40.9
DI-4E-SW	60 1/4	153.0	24 1/4	61.6	12 3/4	32.4	4	23.125	58.74	59.25	150.50	2	22.5	115	52.3
DI-5E-SW	74 1/4	188.6	24 1/4	61.6	12 3/4	32.4	5	23.125	58.74	73.25	186.06	2	27.2	140	63.6
DI-6E-SW	88 1/4	224.2	24 1/4	61.6	12 3/4	32.4	6	23.125	58.74	87.25	221.62	2	32.0	220	100.0

REMOTE CONTROL CUTOUT IS 9" X 4-3/8"

Electrical Specifications:

(Consult factory for 3-phase electrical requirements and other options)

Model	120V 750W			208V 750W			240V 750W		
	Watt	Amps	NEMA	Watt	Amps	NEMA	Watt	Amps	NEMA
DI-1E-SW	750	6.3	5-15	750	3.6	6-20	750	3.1	6-20
DI-2E-SW	1500	12.5	5-15	1500	7.2	6-20	1500	6.3	6-20
DI-3E-SW	2250	18.8	L5-30	2250	10.8	6-20	2250	9.4	6-20
DI-4E-SW	3000	25.0	5-50	3000	14.4	6-20	3000	12.5	6-20
DI-5E-SW	3750	31.3	5-50	3750	18.0	L6-30	3750	15.6	L6-30
DI-6E-SW	N/A	N/A	N/A	4500	21.6	L6-30	4500	18.8	L6-30

Model	120V 1200W			208V 1200W			240V 1200W		
	Watt	Amps	NEMA	Watt	Amps	NEMA	Watt	Amps	NEMA
DI-1E-SW	1200	10	5-15	1200	5.8	6-20	1200	5	6-20
DI-2E-SW	2400	20	L5-30	2400	11.5	6-20	2400	10	6-20
DI-3E-SW	3600	30	5-50	3600	17.3	L6-30	3600	15	6-20
DI-4E-SW	N/A	N/A	N/A	4800	23.1	L6-30	4800	20	L6-30
DI-5E-SW	N/A	N/A	N/A	6000	28.9	6-50	6000	25	6-50
DI-6E-SW	N/A	N/A	N/A	7200	34.6	6-50	7200	30	6-50



Duke Manufacturing Co.
2305 N. Broadway
St. Louis, MO 63102

Phone: 314-231-1130
Toll Free: 1-800-735-3853
Fax: 314-231-5074

www.dukemfg.com

Printed in U.S.A.
© 2025, Duke Manufacturing Co.