

# Insulated Multi-Functional Cookers

**Gas Fired,  
Insulated for Safety™  
10° Tilting, Leg Mounted  
Made in USA**

**Skittle®  
Model SKG**

## Standard Features



**Model SKG15-9  
(with optional food pans)**

- ◆ 304 stainless food contact zone with:
  - ◇ 304 stainless 1 ½" compression draw-off
- ◆ 304 stainless seam welded pan body with:
  - ◇ 10° tilting pan, 31" working height
  - ◇ Food pan holder under draw-off (except SKG5)
  - ◇ Insulated sides and bottom
  - ◇ Tapered access rim
  - ◇ Electronic Ignition
  - ◇ 120V, single phase (1Ø) standard
- ◆ Adjustable thermostat (175°F to 400°F)
- ◆ High limit safety thermostat
- ◆ Patented 304 stainless seam welded Capsule Lid with:
  - ◇ Variable position, actuator-assisted opening
  - ◇ Insulated sides & top
  - ◇ Adjustable steam vent
  - ◇ 304 stainless safety handle
  - ◇ "L" Lid condensate containment
- ◆ Cassette rack(s) for 12x20 food pans
- ◆ 304 stainless, seam welded component enclosure
- ◆ 304 stainless, seam welded tubular frame construction
- ◆ Single ball valve with 48" s/s flexible spray hose assembly

Legion equipment is built to comply with applicable standards for manufacturers. Approval agencies may include ASME, NSF, UL, ETL, AGA, CSA, CGA, and others. Legion reserves the right of design improvement or modification as warranted. U.S. Patent Nos. 5,553,531, 5,964,145 & Des. 371,715.

## Models and Capacities

| Model    | 2.5" Insert Pans | Cooking Baskets | Griddle Area (in. <sup>2</sup> ) | Kettle (Gals.) | Frying Oil (lbs.) | Oven Volume (ft. <sup>3</sup> ) |
|----------|------------------|-----------------|----------------------------------|----------------|-------------------|---------------------------------|
| SKG5-5   | 5                | 4               | 351                              | 7.6            | 35                | 3.9                             |
| SKG5-7   | 5                | 4               | 351                              | 10.6           | 35                | 4.3                             |
| SKG5-9   | 5                | 4               | 351                              | 13.7           | 35                | 4.7                             |
| SKG10-5  | 10               | 8               | 703                              | 15.2           | 70                | 7.7                             |
| SKG10-7  | 10               | 8               | 703                              | 21.3           | 70                | 8.5                             |
| SKG10-9  | 10               | 8               | 703                              | 27.4           | 70                | 9.4                             |
| SKG10-11 | 10               | 8               | 703                              | 33.5           | 70                | 10.2                            |
| SKG15-5  | 15               | 12              | 1029                             | 22.3           | 105               | 11.3                            |
| SKG15-7  | 15               | 12              | 1029                             | 31.2           | 105               | 12.5                            |
| SKG15-9  | 15               | 12              | 1029                             | 40.1           | 105               | 13.7                            |
| SKG15-11 | 15               | 12              | 1029                             | 49.0           | 105               | 14.9                            |

Select draw-off valve: ☐ 1.5" ☐ 2" ☐ 3"

With: ☐ compression ☐ ball type fitting

See price list for other draw-off options.

Select Voltage: ☐ 120V ☐ 208V ☐ 240V

Select Gas: ☐ Natural ☐ Propane (LP) ☐ Other

## Optional Features and Accessories

See price list for supplemental information regarding options

### Faucet Options:

☐ Single ball valve mounted to frame with 48" vinyl flexible spray hose assembly

☐ 48" flexible spray hose assembly (vinyl or stainless) for use with dual or single fill faucet

☐ Automatic water filling meter

(Call for information regarding additional faucet options)

### Prison/Security Options:

☐ Fasteners (screws & nuts)

☐ Nut driver tool

☐ Draw-off nut driver tool

☐ Screw driver tool

☐ Lockable control cover

☐ Draw-off protection

### Other Options:

☐ Electric timer with buzzer

☐ Knockdown capability for 26" x 66" opening (shipped assembled)

☐ Gas quick disconnect 3/4"

☐ Flexible gas hose 3/4" x 60"

### Accessories:

☐ Perforated cooking/steaming basket (11" x 20½" x 5")

☐ Perforated or solid 12 x 20 food pans, 2½, 4 or 6 inch deep

☐ Draw-off drain spout

☐ Draw-off strainer

☐ Draw-off drain hose

☐ #10 Can holder for draw-off

☐ Flat bottom scoop

☐ Fry scoop

☐ Skittle care kit



**LEGION** Legion Industries, Inc.  
(706) 554-4411 Fax: (706) 554-2035


P.O. Office Box 728 Waynesboro, GA 30830 (800) 887-1988  
www.legionindustries.com sales@legionindustries.com

# Skittle® Model SKG

Gas-Fired,  
Insulated for Safety™  
10° Tilting, Leg Mounted  
Made in USA

# Insulated Multi- Functional Cookers

DRAWING REPRESENTS MODEL SKG10-7 WITH 1 1/2" DRAW-OFF

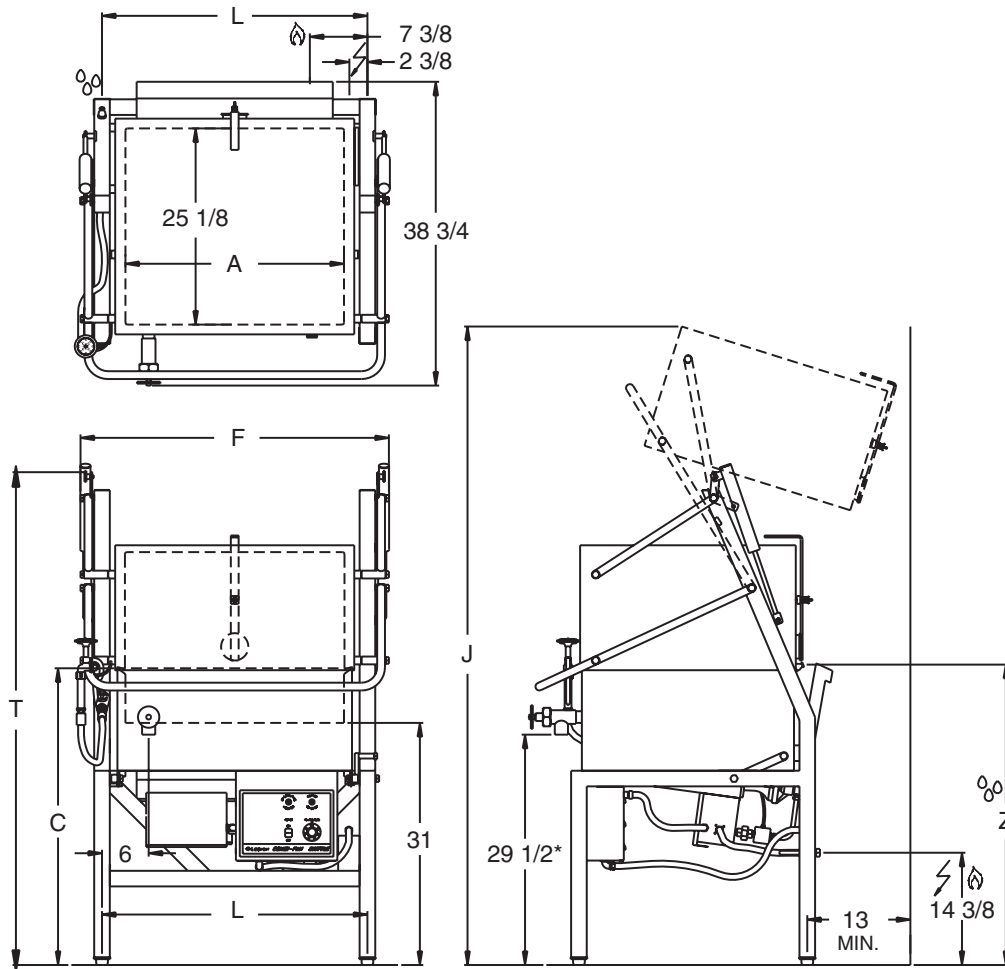

## SKITTLE® DIMENSIONS

| Model* | A    | F    | L    | Model*     | A    | F    | L    | Model*     | A    | F    | L    | Depth | C    | J    | T    | Z    |
|--------|------|------|------|------------|------|------|------|------------|------|------|------|-------|------|------|------|------|
| SKG5-5 | 14.0 | 25.5 | 20.0 | SKG10-5    | 28.0 | 39.5 | 34.0 | SKG15-5    | 41.0 | 52.5 | 47.0 | 5     | 36.0 | 79.8 | 61.1 | 36.3 |
| SKG5-7 | 14.0 | 25.5 | 20.0 | SKG10-7    | 28.0 | 39.5 | 34.0 | SKG15-7    | 41.0 | 52.5 | 47.0 | 7     | 38.0 | 81.8 | 63.1 | 38.3 |
| SKG5-9 | 14.0 | 25.5 | 20.0 | SKG10-9    | 28.0 | 39.5 | 34.0 | SKG15-9    | 41.0 | 52.5 | 47.0 | 9     | 40.0 | 83.8 | 65.1 | 40.3 |
| N/A    |      |      |      | SKG10-11** | 28.0 | 39.5 | 34.0 | SKG15-11** | 41.0 | 52.5 | 47.0 | 11    | 42.0 | 85.8 | 67.1 | 42.3 |

\*Dimensions on these drawings are applicable only when using a 1.5" diameter draw-off valve. If a 2" or 3" diameter draw-off valve is required, contact Legion for applicable dimensions.

\*\*Vertical dimensions of 11" deep pan may be reduced by 2" to match 9" deep pan.

## SKITTLE® GAS SPECIFICATIONS

| Model*    | Gas Rating - Btu Input |         | Gas Pressure & Piping Specifications      |                                             |
|-----------|------------------------|---------|-------------------------------------------|---------------------------------------------|
|           | Natural                | Propane | Natural                                   | Propane                                     |
| SKG5-( )  | 34,000                 | 35,000  | Piping - 3/4" IPS                         |                                             |
| SKG10-( ) | 100,000                | 111,000 | Inlet Pressure Range, 5.0-7.0 inches w.c. | Inlet Pressure Range, 12.0-14.0 inches w.c. |
| SKG15-( ) | 132,000                | 149,000 | Outlet Pressure Range, 3.5 inches w.c.    | Outlet Pressure Range, 10.0 inches w.c.     |

U.S. PATENT NOS. 5,553,531, 5,964,145 & DES. 371,715

Revision 512



**LEGION** Legion Industries, Inc. P.O. Office Box 728 Waynesboro, GA 30830 (800) 887-1988  
(706) 554-4411 Fax: (706) 554-2035 www.legionindustries.com sales@legionindustries.com