Swivel Sink and Pantry Faucets B-0230-187XWSC4


TAG:	


Double Pantry Faucet

Architect/Engineering Specifications:

8" wall mount mixing faucet with polished chrome plated brass body, 3 5/8" swivel/rigid gooseneck with 1.5 GPM aerator, ceramic cartridges with check valves, wrist action handles and 1/2" NPT female inlets. Certified to ASME A112.18.1/CSA B125.1, NSF 61-Section 9 and NSF 372. Meets ADA ANSI/ICC A117.1 requirements.

Job Name	
Model Specified	Quantity
Variations Specified	
Date	



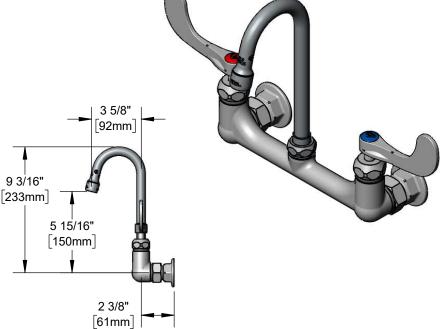

Features & Benefits:

- 8" wall mount mixing faucet with polished chrome plated brass body
- 3 5/8" swivel/rigid gooseneck
- Lock washer provided for rigid application
- 1.5 GPM aerator, Series 1 (B-0199-01-WS)
- Quarter-turn Cerama cartridges with check valves to prevent cross flow of water
- 4" Wrist action handles w/ color coded indexes
- 1/2" NPT female eccentric inlets w/ Ø 2" flanges
- Adjustable centers from 7 3/4" to 8 1/4"
- Material: Polished chrome plated brass body & tubular spout and chrome plated metal handles

Product Compliance:

- ASME A112.18.1 / CSA B125.1
- NSF 61 Section 9
- NSF 372 (Low Lead Content)
- ANSI A117.1 (ADA)

Warranty: One Year (Limited)

Cerama Cartridge: Lifetime (Limited)

ADA Compliant

Performance Data:

Pressure: 20 - 125 psi
Temperature: 40 °F - 180 °F

Flow Rate: 1.5 GPM @ 60 psi

Optional Outlets (Series 1 / VR Series 6)

GPM	Aerated	Non-Aerated	VD Assets d	VR Non-Aerated	Optional Handles
0.35	N/A	(Laminar)	VR Aerated	(VR Laminar)	□ 4" Wrist Action (Standard)
0.5	N/A	□ B-0199-01-N035	N/A	□ B-0199-06-N035	□ Lever
1.0	□ B-0199-01-F10	□ B-0199-01-N05	N/A	□ B-0199-06-N05	□ 4-Arm
1.2	□ B-0199-01-F12	N/A	□ B-0199-06-F10	N/A	
1.5	Standard	□ B-0199-29	□ B-0199-06-WS	□ B-0199-29VR	Optional Cartridges With Checks
2.2	□ B-0199-01	□ B-0199-21	□ B-0199-06	□ B-0199-21-VRF	'
					□ Quarter-Turn Cerama w/ Check Valve (Standard)
					□ Quarter-Turn Eterna w/ Spring Check









