



ER KleenScreen PLUS® FILTRATION SYSTEM

Built-In Filtration System For 2ERF, 3ERF &
4ERF Fryers



Model 2ER85CF

Shown with optional casters



SPECIFICATIONS

Built-in filtersystem, Vulcan Model No. (# of fryers - 2, 3 or 4) ER (50 or 85) (control type A, D, or C) F (add suffix -F to fryer battery Model No., i.e. 2ER50DF). Filter system accommodates a maximum of four cabinets for ER50F and maximum of three for ER85F. Drawer style filter pan assembly holds 70 lbs. shortening capacity for ER50F and 110 lbs. capacity for ER85F. Filter vessel constructed of drawn (seamless) 18 gauge stainless steel. The 2ER50F filter pan weighs only 12.2 lbs. and the filter pan for the 2ER85F weighs only 20.5 lbs. 1/3 H.P. motor and pump circulates hot frying compound at the rate of 8 gallons per minute, activated by a one touch push button switch. System provided standard with stainless steel mesh filter screen. Optional KleenScreen PLUS® envelopes filter out particulate down to .5 microns. Standard equipment comes on legs, has a tank brush and cleanout rod. Hands free oil return line connection. Drain valve interlock switch turns fryer's heating elements off when drain valve is opened. Power supply is 208 volt, 60 Hz, 3 phase.

NSF listed. CSA design certified.

Specify voltage when ordering.

Project _____
AIA # _____ SIS # _____
Item # _____ Quantity _____ C.S.I. Section 114000

STANDARD FEATURES

- Filter system accommodates maximum of four fryer cabinets (ER50F), maximum of three (ER85F).
- Boil Out ByPass™ easily removes boil out solution from fry tank without contact of drain manifold, filter pan or motor/pump.
- Drain valve interlock switch (DVI). Turns off heating elements automatically when draining oil or lifting heating elements during cleaning.
- Drawn (seamless) 18 gauge stainless steel filter pan. 70 lbs. frying compound capacity on ER50F, 110 lbs. capacity on ER85F.
- 6" adjustable legs.
- Stainless steel mesh 2-sided filter screen – surface area 270 sq. in.
- 1/3 H.P. motor and pump circulates frying compound at a rate of 8.0 gallons per minute.
- One touch push button switch to engage pump and motor (solid state controls).
- Tank brush and clean-out rod.
- One year limited parts and labor warranty.
- 6' High Temperature Discard Hose.
- 10 year fry tank limited warranty.

OPTIONAL FEATURES (FACTORY INSTALLED)

- ☐ 480 volt, 3 phase (NEMA 5-15P).
(Separate 120 volt, 20 amp electric supply required.)
Not for sale in Canada.
- ☐ Second year extended limited parts and labor warranty.

ACCESSORIES (PACKAGED AND SOLD SEPARATELY)

- ☐ Stainless steel tank cover – doubles as a work surface top.
- ☐ Micro-Filtration Fabric Envelopes – 6 filters/per package.
- ☐ Casters, adjustable (2 locking, 2 non-locking).
- ☐ "Add-On" Frymate™ – VX15 or VX21S.
- ☐ Rear oil reclamation discard connection (factory installed).
- ☐ Prison Security Package (factory installed).
- ☐ Single Basket Lift (factory installed).

REFERENCE MATERIALS

- ☐ See 1ER50 Spec Sheet F32900 for electrical specs.
- ☐ See 1ER85 Spec Sheet F32901 for electrical specs.
- ☐ See 1ERF Spec Sheet F32969 for single unit KleenScreen PLUS®.

ER KleenScreen PLUS® Filtration System - Built-In Filtration System For 2ERF, 3ERF & 4ERF Fryers

Approved by _____ Date _____ Approved by _____ Date _____



ER KleenScreen PLUS® FILTRATION SYSTEM

Built-In Filtration System For 2ERF, 3ERF & 4ERF Fryers


INSTALLATION INSTRUCTIONS

- 1. An adequate ventilation system is required for Commercial Cooking Equipment. Information may be obtained by writing to the National Fire Protection Association, Batterymarch Park, Quincy, MA 02269. When writing refer to NFPA No. 96.
- 2. All models require a 6" clearance at both sides and rear adjacent to combustible construction.
- 3. All models require a 16" (407 mm) minimum clearance to adjacent open top burner units.
- 4. This appliance is manufactured for commercial installation only and is not intended for home use.

SERVICE CONNECTIONS:

- ⓔ1 1. Each tank requires it's own separate power supply.
- 2. Power supply for basket lifts and/or filter motor is wired into the fryer's high voltage line terminal block, **except for 480V which requires a separate 120V single phase electrical power connection NEMA 5-15P service (not supplied with fryer, and not available in Canada.).**

NOTE: In line with its policy to continually improve its product, Vulcan reserves the right to change materials and specifications without notice.

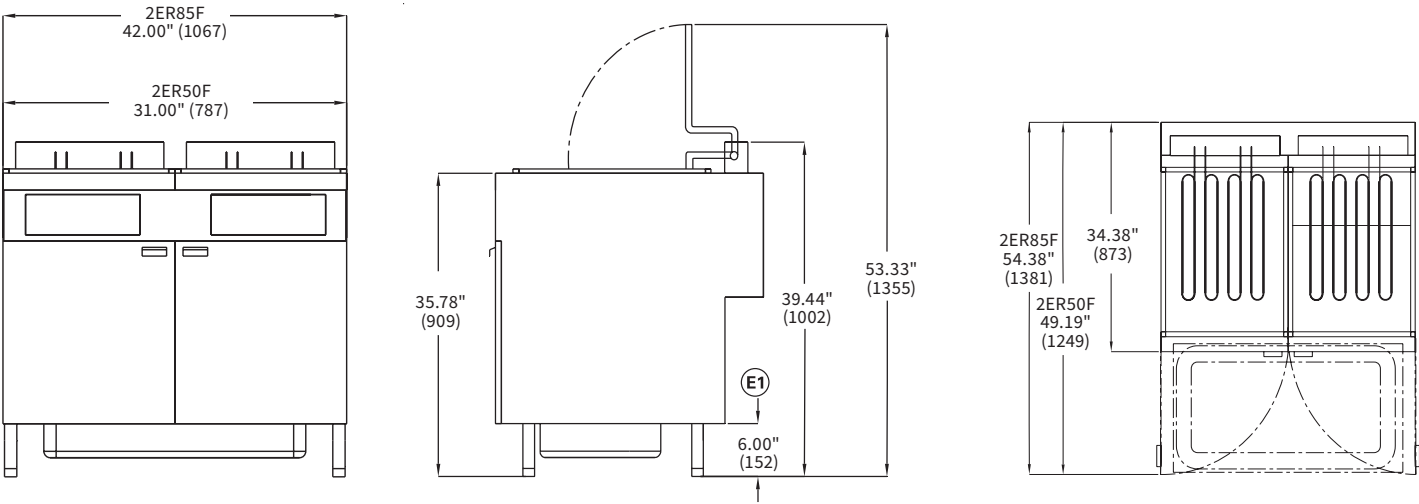

FILTER SYSTEM SPECIFICATION:

Screen = 270 sq.
Micro Filtration Fabric Envelope = 350 sq. in

MOTOR/PUMP SPECIFICATIONS:

480V = 1/3 HP 1750 RPM 8.0 gal./min 120V / 5.0A 50/60Hz 1 Ph.
208V = 1/3 HP 1750 RPM 8.0 gal./min 208V / 3.6A 50/60Hz 1 Ph.

Model	Filter Pan Capacity	Electrical	Battery Dimensions (Widths)		
			2 Fryers	3 Fryers	4 Fryers
2ER50F	70 lbs.	17kW Refer to spec. sheet F-32900	31"	46½"	62"
3ER50F					
4ER50F					
2ER85F	110 lbs.	24kW Refer to spec. sheet F-32901	42"	63"	—
3ER85F					

NOTE: Fryer in battery with fuses (master) must add 5 amps for the motor / pump. Remaining fryers (slave) use amps per spec. sheet.

This appliance is manufactured for commercial use only and is not intended for home use.

As continued product improvement is a policy of Vulcan, specifications are subject to change without notice.