
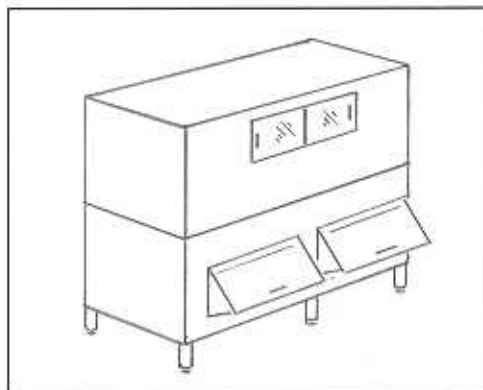
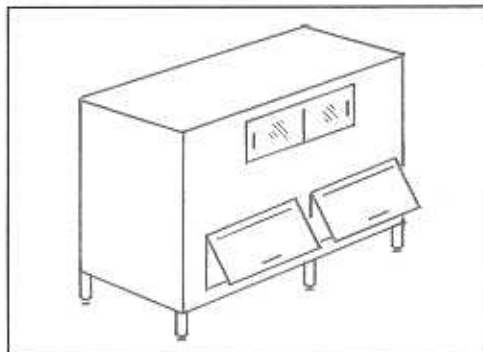


UPRIGHT SERIES DOUBLE BUMPER DOOR

- ◆ EASY ACCESS TO ICE WITH SCOOP OR SHOVEL.
- ◆ ONE AND TWO SECTION MODELS AVAILABLE.
- ◆ STAINLESS STEEL TOPS AND DOORS.
- ◆ REFRIGERATOR DOOR AVAILABLE.
- ◆ BIN DIVIDERS AVAILABLE.
- ◆ **CUSTOM AND LARGER SIZES AVAILABLE; CALL FOR SPECIFICATION ASSISTANCE.**

GENERAL SPECIFICATIONS

INTERIOR..... STAINLESS STEEL, TYPE 304, FULLY WELDED SEAMS.
 EXTERIOR..... POLISHED STAINLESS STEEL or STUCCO ALUMINUM.
 GALVANIZED STEEL BACK and BOTTOM (STAINLESS OPTIONAL).
 INSULATION..... 2" EXPANDED POLYSTYRENE.
 DRAIN..... 1" MPT, CENTER BOTTOM.
 LEGS..... 6" ADJUSTABLE with STAINLESS STEEL FEET.
 ACCESS DOOR..... ACRYLIC, 8 1/2" x 29" OPENING.
 BUMPER DOOR..... STAINLESS STEEL, 14 1/2" X 29" OPENING. REMOVABLE.

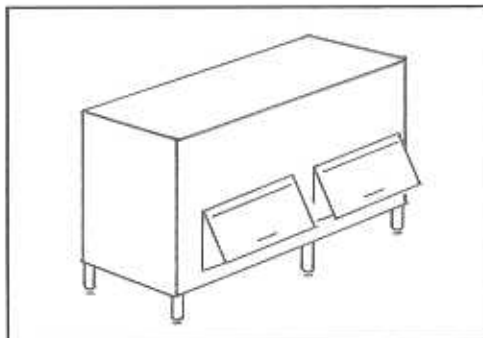

MODEL NUMBER	APPROX STORAGE (lbs.)	WIDTH (in.)	DEPTH (in.)	HEIGHT (in.)
SPL-1100	1100	90 1/4	32	36
SPL-1450	1450	70 1/4	38	46
SPL-1600	1600	72 1/4	48	39
SPL-1750	1750	72 1/4	48	42
SPL-1850	1850	96 1/4	31	51
SP-1800	1800	72 1/4	31	61
SP-2100	2100	72 1/4	40	57
SP-2200	2200	72 1/4	48	53
SP-2650	2650	72 1/4	40	69
SP-1501-2PC	1700	72 1/4	36	54
SP-2100-2PC	2100	72 1/4	40	57
SP-2201-2PC	2200	72 1/4	45	54
SP-2200-2PC	2200	72 1/4	48	53
SP-2500-2PC	2500	72 1/4	45	59
SP-2700-2PC	2700	72 1/4	40	70
SP-2750-2PC	2750	72 1/4	48	61
SP-3000-2PC	3000	72 1/4	48	66
SP-3200-2PC	3200	72 1/4	48	69
SP-3500-2PC	3500	72 1/4	48	76
SP-3900-2PC	3900	72 1/4	48	82
SP-4600-2PC	4600	72 1/4	48	96
SP-2845-2PC	2800	96 1/4	48	54
SP-3596-2PC	3500	96 1/4	40	69
SP-4345-2PC	4345	96 1/4	48	74
SP-5300-2PC	5300	95 1/4	48	80
SP-5900-2PC	5900	96 1/4	48	94
2PC= TWO SECTION CONSTRUCTION				

Height includes 6" adjustable legs. Bumper door adds an additional 9" to depth.

MGR EQUIPMENT CORP.

22 Gates Avenue, Inwood, New York 11096-1697

Phone: (516) 239-3030

Fax: (516) 239-3602

Toll Free: (800) 486-4647