

- **GHS456R** 51"L x 43"D x 55-3/4"H
- **GHS556R** 62-7/8"L x 43"D x 55-3/4"H
- **GHS656R** 75-3/8"L x 43"D x 55-3/4"H

Included

- Breeze self-contained refrigeration
- Curved lift-up front glass
- LED top & shelf lights
- One year parts & labor; 5 year compressor warranty
- Stainless steel rear exterior
- Warmest average product temperature of 40°F or less




GHS456R

Specify	Standard Features	Additional Options
EXTERIOR COLOR	<ul style="list-style-type: none"> • Laminate (stock colors) 	<ul style="list-style-type: none"> • Laminate (non-stock colors) • Powder coated (stock/non-stock colors) • Powder coated Silversan Black • Stainless steel
INTERIOR COLOR	<ul style="list-style-type: none"> • Powder coated Silversan Black 	<ul style="list-style-type: none"> • Stainless steel
LOWER FRONT PANEL COLOR	<ul style="list-style-type: none"> • Powder coated Silversan Black 	<ul style="list-style-type: none"> • Powder coated (stock/non-stock colors) • Stainless steel
BASE SUPPORT	<ul style="list-style-type: none"> • Casters w/ levelers (self-cont.) 	
BUMPER FRONT	<ul style="list-style-type: none"> • 1" Boston bumper (specify color) 	<ul style="list-style-type: none"> • 1" Stainless steel plate rail bumper
END PANELS	<ul style="list-style-type: none"> • Full w/stainless steel mirror interior 	<ul style="list-style-type: none"> • Cutaway w/glass • None (specify per line-up)
SCALE STAND	<ul style="list-style-type: none"> • None 	<ul style="list-style-type: none"> ¹ • Scale stand w/ receptacle & CAT5 (specify location) • Scale stand w/ receptacle (specify location)
PRICE TAG MOLDING	<ul style="list-style-type: none"> • None 	<ul style="list-style-type: none"> • 1" Price tag molding (black or silver) • Universal price tag molding (clear w/ open top)
REAR DOORS	<ul style="list-style-type: none"> • Clear glass rear sliding doors 	<ul style="list-style-type: none"> • Reflective glass rear sliding doors
SHELVING	<ul style="list-style-type: none"> • 16" & 20" & 20" Solid shelving 	<ul style="list-style-type: none"> • 16" & 20" & 20" Glass shelving
LIGHTS	<ul style="list-style-type: none"> • LED 3500K w/ frosted lens 	<ul style="list-style-type: none"> • LED 4000K w/ frosted lens
ELECTRICAL CONNECTION	<ul style="list-style-type: none"> • 6' Straight blade power cord 	<ul style="list-style-type: none"> • 6' Locking blade power cord
REFRIGERATION	<ul style="list-style-type: none"> • Breeze s/c refrigeration 	
MISCELLANEOUS		<ul style="list-style-type: none"> • Front glass lock • Rear door lock


Option Notes: 1 - Separate circuit required

Intended Environment: Type I - Designed to operate in ambient conditions of 75°F with 55% relative humidity unless noted otherwise in system information below.			
Zone	Intended Product To Be Displayed		
1	Packaged refrigerated products	Warmest Avg Prod Temp °F	40

PLAN VIEW

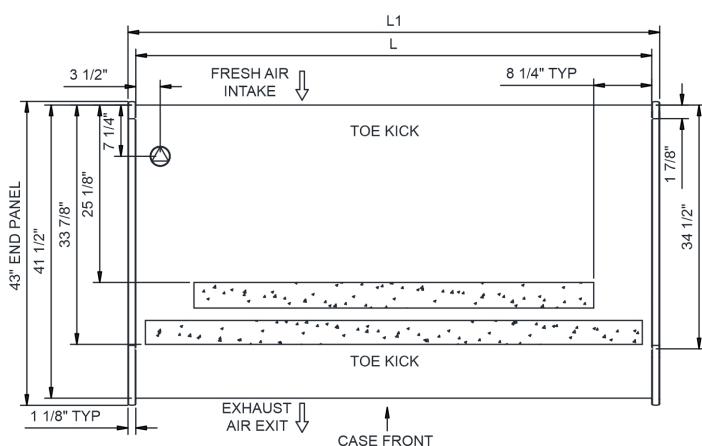

SIDE VIEW

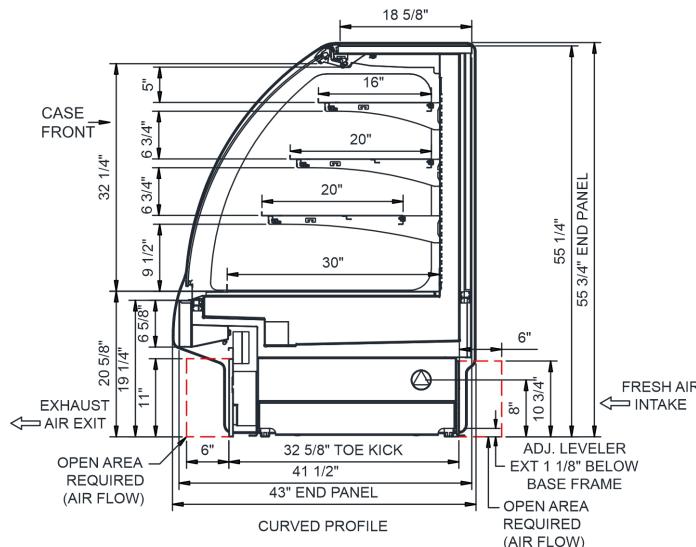

NOTE: ALL DIMENSIONS APPROXIMATE



ELECTRICAL JUNCTION BOX
(SUPPLIED WITH 6" LEADS OR POWER CORD).



LOCATION OF DRAIN TUBE FOR REMOTE REF.
ONLY (SUPPLIED WITH 3/4" OR 1 1/2" PVC TUBE).



REFRIGERATION LINE CONNECTION.



REMOTE FLOOR SINK & UTILITIES
ACCESS AREA.



SELF-CONTAINED CASE SERVICE ACCESS AREA.



DRY CASE SERVICE ACCESS AREA.

Model Technical Specifications

Model	L"	L1"	L2"	System Circuit Volts	Phs	Freq	Amps ***	Watts	Wires	NEMA Plug	SST	Conv. Rack BTUH	Para. Rack BTUH	Est Wt		
GHS456R	48.75	51.00	.00	Self-Contained (R290)	Circuit #1	110-120	1	60	15.91	1,516	2+G	5-20P or L5-20P	N/A	N/A	N/A	N/A
GHS556R	60.63	62.88	.00	Self-Contained (R290)	Circuit #1	110-120	1	60	16.00	1,697	2+G	5-20P or L5-20P	N/A	N/A	N/A	N/A
GHS656R	73.13	75.38	.00	Self-Contained (R290)	Circuit #1	110-120	1	60	16.00	1,602	2+G	5-20P	N/A	N/A	N/A	N/A

*** Does not include electric defrost on freezer models.

Regulatory Approvals:

All Models	Accordance with AHRI Std 1200 ETL Listed to UL 471 ETL Listed to CAN/CSA 22.2 No. 120 ETL Sanitation to NSF/ANSI 7
------------	---



In Accordance with
AHRI Std 1200

DOE 2017
Energy Efficiency
Compliant

Important Notes:

- 1) ELECTRICAL NOTE: If GFCI is required, a GFCI breaker MUST be used in lieu of a GFCI receptacle
- 2) 45" minimum door entry clearance required (without shipping skid).

3)) Units must be shimmed during installation to ensure the unit is level and plumb.

WARNING: This product can expose you to chemicals, including Urethane (Ethyl Carbamate), which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.