


POLY TOP CUTTING TABLES

Flat Top Stainless Legs and Crossrails

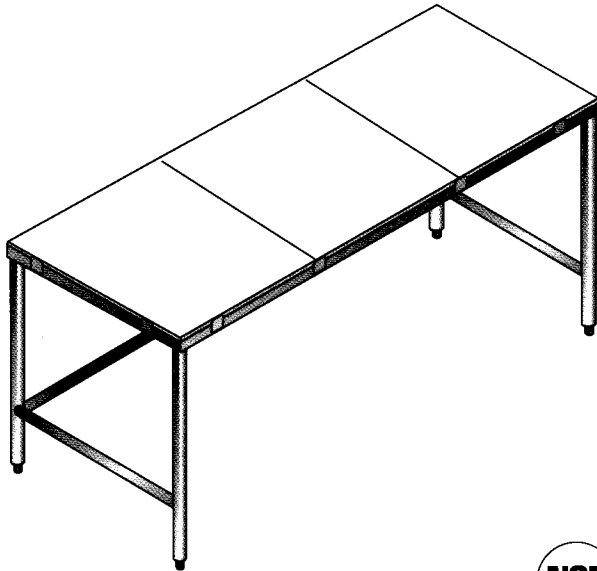

FEATURES

NSF and USDA approved high density polyethylene tops, sectional and removable.

Welded set up design creates a solid sturdy unit with **no assembly required**.

Square edge design for clean abutment to other equipment.

Under bracing locations provide solid top and minimal deflection.

CONSTRUCTION

Frame: 1½" square 16 Gauge Type 304 stainless steel tubing.

Top: 5/8" thick high density polyethylene.

Bracing: Stainless steel channels on max 24" centers.

Legs: 1½" O.D. stainless steel tubing with stainless steel adjustable bullet feet.

Crossrails: 1½" O.D. stainless steel tubing notched to fit legs and fully welded.

FLAT TOP STAINLESS LEGS & CROSSRAILS

OA Length	Model No.	Approx. Weight (lbs.) (kg)		Cube
24" WIDE TABLES				
48"	4MCT-24	75	34	29
60"	5MCT-24	95	43	36
72"	6MCT-24	115	52	43
84"	7MCT-24	135	61	51
96"	8MCT-24	155	70	58
108"	9MCT-24	170	77	71
120"	10MCT-24	190	86	72

30" WIDE TABLES				
48"	4MCT-30	95	43	36
60"	5MCT-30	120	55	45
72"	6MCT-30	145	66	54
84"	7MCT-30	170	77	63
96"	8MCT-30	190	86	72
108"	9MCT-30	215	98	81
120"	10MCT-30	240	109	95

36" WIDE TABLES				
48"	4MCT-36	111	50	42
60"	5MCT-36	140	64	52
72"	6MCT-36	170	77	63
84"	7MCT-36	198	90	74
96"	8MCT-36	222	101	84
108"	9MCT-36	250	114	95
120"	10MCT-36	280	127	105

DETAILED SPECIFICATIONS

Poly Top Cutting Tables • No Undershelf

FLAT TOP STAINLESS LEGS & CROSSRAILS

24" WIDE


A LENGTH	MODEL NO.	B	C	D
48"	4MCT-24	44½"	N/A	24"
60"	5MCT-24	56½"	N/A	24"
72"	6MCT-24	68½"	N/A	24"
84"	7MCT-24	80½"	39½"	24"
96"	8MCT-24	92½"	45½"	24"
108"	9MCT-24	104½"	51½"	24"
120"	10MCT-24	116½"	57½"	24"

30" WIDE

A LENGTH	MODEL NO.	B	C	D
48"	4MCT-30	44½"	N/A	30"
60"	5MCT-30	56½"	N/A	30"
72"	6MCT-30	68½"	N/A	30"
84"	7MCT-30	80½"	39½"	30"
96"	8MCT-30	92½"	45½"	30"
108"	9MCT-30	104½"	51½"	30"
120"	10MCT-30	116½"	57½"	30"

36" WIDE

A LENGTH	MODEL NO.	B	C	D
48"	4MCT-36	44½"	N/A	36"
60"	5MCT-36	56½"	N/A	36"
72"	6MCT-36	68½"	N/A	36"
84"	7MCT-36	80½"	39½"	36"
96"	8MCT-36	92½"	45½"	36"
108"	9MCT-36	104½"	51½"	36"
120"	10MCT-36	116½"	57½"	36"





TOLERANCE $\pm 1/4"$

MATERIALS

Top: 5/8" Thick High Density Polyethylene

Legs: 1 5/8" Diameter S/S Tubing

Cross-rails: 16 Gauge Type 304 S/S

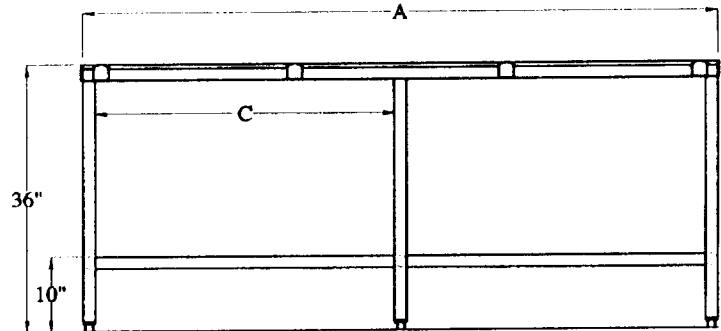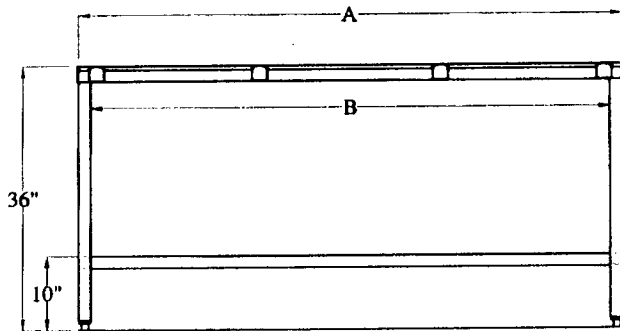

Universal Stainless is constantly engaged in a program of improving products and, therefore, reserves the right to change specifications without prior notice.