

Project Name:	
Location:	
Item #:	Qty:
Model:	

# V-SERIES DIGITAL UNDERCOUNTER ICE MACHINE

**MODEL:** 

MVI200F



**ELECTRIC** -

120V / 60Hz / 1Ph International voltage available 6' (2m) NEMA 5-15P cord set inculded



NEMA 5-15P

#### **3RD PARTY APPROVALS**









DOE 2018 Compliant

# MAXX ICE WARRANTY (USA / CANADA)

1 Year Compressor Only Warranty: 6 Months Parts & Labor

For more information, contact:

TechnicalServices@TheLegacyCompanies.com or 877.368.2797

Maxx Ice V-Series digital undercounter air-cooled ice machines are perfect for any free-standing or built-in application. Available in both full or half dice cubes, each unit features a sanitary self-contained storage bin. The durable stainless steel and black trim exterior is easy to clean and service. The digital controls and front-breathing design with vertical evaporator will deliver years of reliable ice production.

#### FEATURES AND CONSTRUCTION —

- Stainless steel, black trim exterior
- Air-cooled compressor
- Programmable, user-friendly digital controls
- Digital screen displays ice machine status
- Automatic cleaning cycle and bin overflow prevention
- Internal blue LED light
- 6" adjustable leveling legs
- Includes ice scoop with internal scoop holder
- Antimicrobial agent within polyethylene storage bin liner for improved sanitation

#### DAILY ICE PRODUCTION ——

Air Temp 70°F (21°C) / Water Temp 50°F (10°C) Air Temp 90°F (32°C) / Water Temp 70°F (21°C) MVI200F...... 153 lbs (70 kg)

# ICE BIN STORAGE CAPACITY —

### OPERATING REQUIREMENTS —


Ambient Air Temperature Range..... 50° to 100°F (10° to 38°C) Water Temperature Range ............... 41° to 90°F (5° to 32°C) Water Usage per 100 lbs of ice...... 13.3 Gallons (50L) Water Supply Line Connection ....... 3/8" FPT Water Pressure Range: Min PSI...... 15 Max PSI .....80\* Min Bar ..... 1.0 Max Bar.....5.5

\*Above 80 PSI requires a regulator Energy Consumption per 100 lbs of ice:


MVI200F...... 8.17 kWh/100 lbs




# V-SERIES DIGITAL UNDERCOUNTER ICE MACHINES

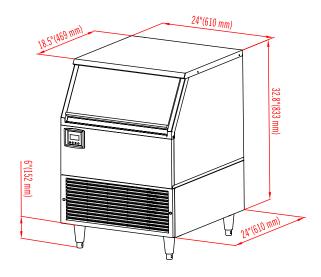


#### REAR VIEW

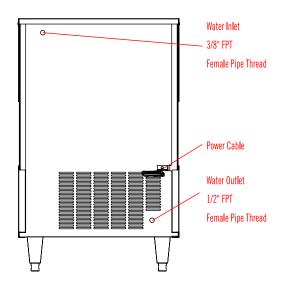

#### SIDE VIEW

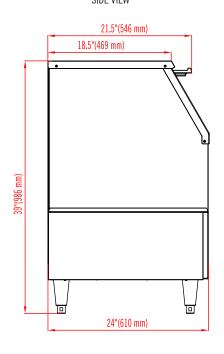

#### FULL DICE CUBE (N MODELS)

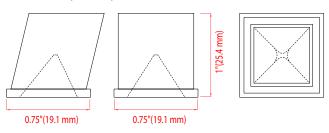

MODEL	EXTERNAL Dimensions	DAILY ICE PRODUCTION (70°F Air / 50°F Water)	ICE BIN Storage Capacity	NET WEIGHT / SHIPPING WEIGHT	AMP DRAW (Making / Harvesting)	REFRIGERANT And Charge Size	ELECTRICAL
MVI200F	24" x 24" x 39" (610 x 610 x 986 mm)	199 lbs (90 kg)	75 lbs (34kg)	141 lbs (64 kg) 157 lbs (71.5 kg)	7A / 8.3A	R-404a 8.11oz (230g)	120V / 60Hz / 1Ph

#### **INSTALLATION** -

- A clearance of 2" from the wall is recommended to promote adequate cooling air circulation
- A gravity drain line is required to install this ice machine
- For optimal performance, the use of a water filter is recommended