

Project: _____	AIA# _____
Item #: _____ Qty: _____	SIS# _____
Model #: _____	

## Undercounter Towers

UC-\_\_-SSR

**Size:**  
Specify the number of  
faucets from 4, 5, 6, 8, 10, 12



*NOTE: Faucet handles  
not included.*



**Intertek**  
4004503

Conforms to NSF/ANSI STD 18

### Standard Features

- All stainless steel construction
- 1/4" shanks with 3/16" restriction lines
- Includes insulated cold plate assembly for recirculating system
- Available in 4, 5, 6, 8, 10, and 12 faucet sizes
- Includes stainless steel faucets and shanks

### NOTES:

1. Installation of the undercounter tower requires a minimum bar top overhang of 7".
2. Undercounter towers do not include a drain pan. Glastender offers a free standing underbar beer drainer. See model numbers BDA or BDB for the main line or C-BD for the Choice line.
3. The beverage and glycol lines exit the bottom of the tower and are rigid, so the undercounter tower must be installed prior to installing the beer drainer. The 8, 10, and 12 faucet models have two sets of lines exiting the bottom of the tower.

### Specifications

#### Materials


- 20 gauge stainless steel

#### Shank Sizes

- 1/4" I.D. with 3/16" fittings

#### Beer and Glycol Lines

- The beverage and glycol lines exit the bottom of the tower and are rigid, so the undercounter tower must be installed prior to installing the beer drainer.
- The 8, 10, and 12 faucet models have two sets of lines exiting the bottom of the tower.

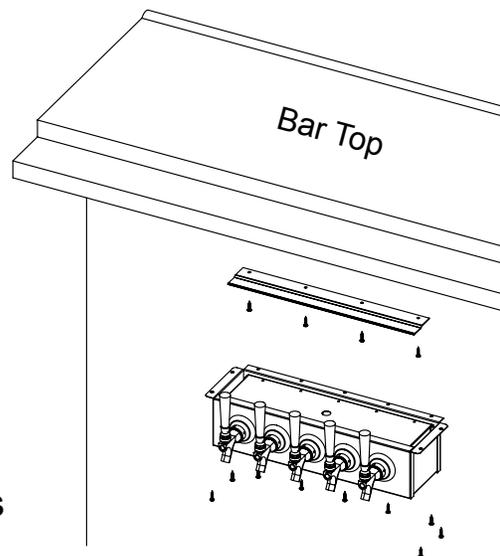

### Mounting Details

**Glastender, Inc.** • 5400 North Michigan Road • Saginaw, MI • 48604-9780  
 989.752.4275 • 800.748.0423 • Fax 989.752.4444  
[www.glastender.com](http://www.glastender.com)




Approval/Notes:

Specifications subject to change without notice. For current specifications please visit our website.

# Undercounter Towers

## Dimensional Information

NOTE: Faucet handles not included.

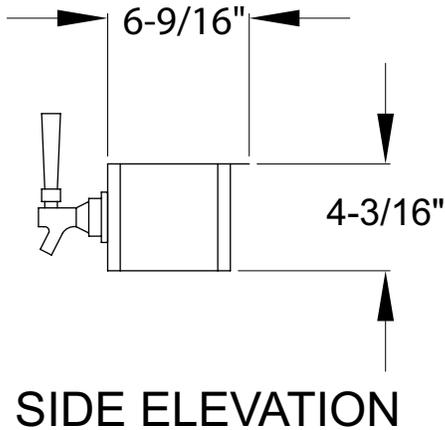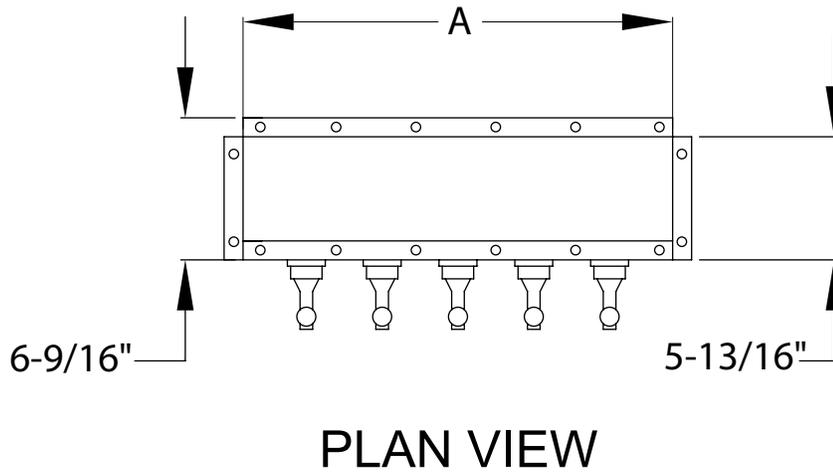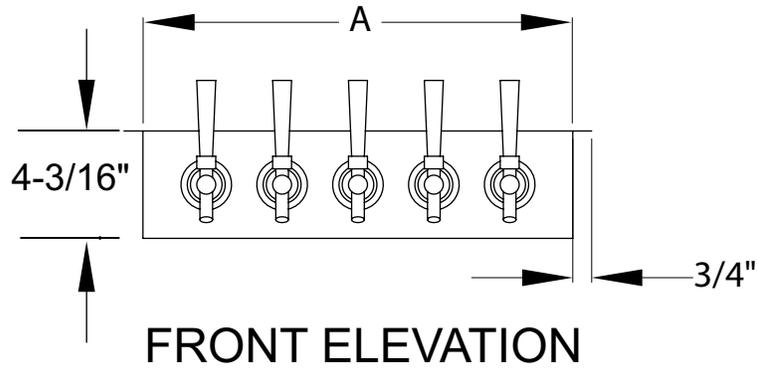

UNDERCOUNTER TOWERS	
NUMBER OF FAUCETS	"A" WIDTH
4.....	14"
5.....	17"
6.....	20"
8.....	26"
10.....	32"
12.....	38"