



# AMERICAN RANGE

A **HATCO** COMPANY

Project \_\_\_\_\_

Item # \_\_\_\_\_

Quantity \_\_\_\_\_

## TEPPANYAKI GRIDDLE

GAS TYPE: ☐ NATURAL ☐ LP



- ☐ ARTY-24    ☐ ARTY-36  
☐ ARTY-48    ☐ ARTY-60

### STANDARD FEATURES

- Stainless steel exterior body
- 3/4" thick and 24" deep steel griddle plate
- 30,000 BTU/hr. round burner creates a hot zone in the center of the griddle
- Large capacity removable grease can
- Stainless steel grease channel and one piece rolled front for easy cleaning
- Two year limited warranty, parts, and labor



**Model Shown ARTY-48**

### DESCRIPTION

American Range, Teppanyaki Griddle, stainless steel exterior body. 3/4" thick and 24" deep steel griddle plate. 30,000 BTU/hr. round burner creates a hot zone in the center of the griddle. Large capacity removable grease can. Stainless steel grease channel and one piece rolled front for easy cleaning. Two year limited warranty, parts, and labor.



DESIGNED & BUILT IN USA  
PROFESSIONAL COOKING EQUIPMENT

A70248 Rev A 08262025



## AMERICAN RANGE

A **HATCO** COMPANY


13592 Desmond St Pacoima CA 91331

T. 818.897.0808 F. 818.897.1670


Toll Free: 888.753.9898

[www.AmericanRange.com](http://www.AmericanRange.com)

# TEPPANYAKI GRIDDLE

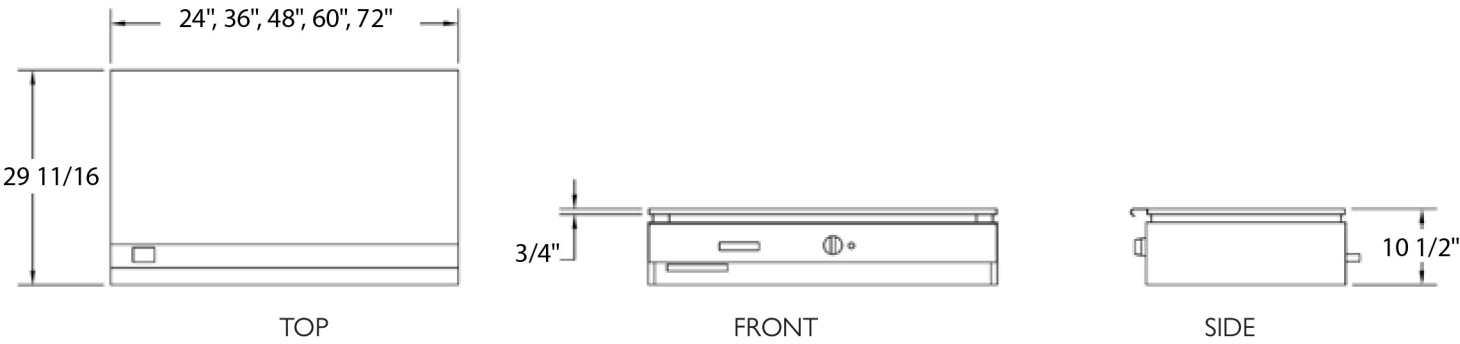

SHIPPING WEIGHT*							
MODEL	BURNERS	WIDTH (MM)	DEPTH (MM)	HEIGHT (MM)	BTU/hr.	(KW)	LBS (KG)
ARTY-24	1	24" (610)	29 11/16" (754)	10 1/2" (267)	30,000	(9)	200 (91)
ARTY-36	1	36" (914)	29 11/16" (754)	10 1/2" (267)	30,000	(9)	300 (136)
ARTY-48	1	48" (1219)	29 11/16" (754)	10 1/2" (267)	30,000	(9)	365 (166)
ARTY-60	1	60" (1524)	29 11/16" (754)	10 1/2" (267)	30,000	(9)	450 (204)

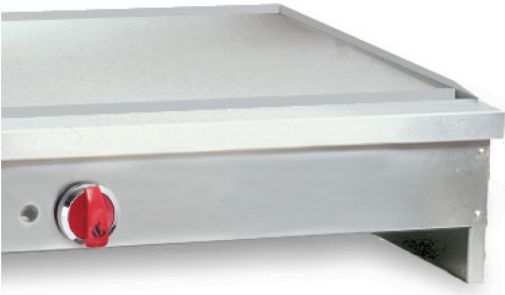

Shown with optional stainless steel all welded 1/2" griddle splash plate. Must be specified when placing your order this can not be field installed.

- Specify type of gas and altitude if over 2000 feet.
- Please specify gas type when ordering.

COMBUSTIBLE WALL CLEARANCES:  
 For use only on non-combustible floors. Legs or casters are required, or 2" (51) overhang is required when curb mounted. Clearance from non-combustible walls is 0". When unit is placed next to combustible walls, clearances must exceed 12" (305) from sides, and 4" (102) from rear. Commercial cooking equipment requires an adequate ventilation system. For additional information, refer to the National Fire Protection Association's standard. NFPA96 "Vapor Removal from Cooking Equipment." (NOTE: For North America only)

MANIFOLD PRESSURE		
NATURAL GAS	PROPANE GAS	MANIFOLD SIZE
5.0" W.C.	10.0" W.C.	3/4" (19MM)

\*Shipping weight includes packaging and is approximate.

