



The Signature of Quality®

FEDERAL INDUSTRIES

A Standex Company

215 Federal Avenue
Belleville, WI 53508-9201

Phone: 800-356-4206
Fax: 608-424-3234
Email: geninfo@federalind.com
Website: www.federalind.com

Project Name: _____

Item #: _____

Model #: _____ Qty: _____

Approval: _____

AIA#

SIS#

CONVERTIBLE SERVICE OVER REFRIGERATED SELF-SERVE SPECIALTY MERCHANDISER

Display a variety of products and serve more customers with pre-sentation and value in mind.



Model SSRC5052 Shown

MODEL	DIMENSIONS (Includes End Panels)
☐ SSRC3652	36 x 34 x 52 (in) 914 x 864 x 1321 (mm)
☐ SSRC5052	50 x 34 x 52 (in) 1270 x 864 x 1321 (mm)
☐ SSRC5952	59 x 34 x 52 (in) 1499 x 864 x 1321 (mm)
☐ SSRC7752	77 x 34 x 52 (in) 1956 x 864 x 1321 (mm)

STANDARD FEATURES

Model Features: Self-Serve Bottom Display

- Steel base construction with black exterior
- Black interior, glass end panels
- Two-tier black display step
- Easily accessible light switch and adjustable power switch located at case rear
- Rear access to refrigeration system for quick and easy service
- Adjustable leg levelers

Model Features: Service Top Display

- Divided merchandising area (36" models have one display area only)
- Tempered lift-up thermopane front glass

Refrigeration

- Condensate evaporator provided for a totally self-contained system
- Electronic temperature controls maintain 38°-40° F case temperature.
- Easy clean, rustproof insulated evaporator coil compartment
- Insulated with high-density urethane foam
- R290 refrigerant
- Thermometer
- Baffle system converts display from non-refrigerated to refrigerated (Service Top Display)

Shelving

- Adjustable black wire shelf

Lighting

- 3500K LED top and shelf light
- DLC Certified, IP66 rated

Agency Approvals

- UL and UL Sanitation listed
- DOE 2017 Compliant

OPTIONAL ACCESSORIES

- | | |
|--|--|
| <ul style="list-style-type: none"> ☐ Reflective End Glass For Self-Serve Refrigerated Base ☐ Special Finish ☐ Energy Saving Night Curtain ☐ Security Night Cover ☐ Solid Rear Sliding Access Doors for Bottom Section ☐ Cord & Plug ☐ Remote Refrigeration (R449a Refrigerant, EEV Included) | <ul style="list-style-type: none"> ☐ Black Wire or Glass Shelf with Light in Lieu of Display Steps ☐ Rear Wrapping Board For Service Top Display ☐ Reflective Rear Doors ☐ Glass Shelves ☐ Casters (Recessed or 4") or 6" Legs |
|--|--|



WARRANTY*
One year Parts and Labor
2nd thru 5th year part
only service compressor
(U.S.A and Canada)



Note: Information is subject to change at any time.
Visit www.federalind.com for the most current specs.

Revised 8/21/2025

AIA#

SIS#

Intended Environment: Type I - Designed to operate in maximum ambient conditions of 75°F (24°C) and 55% relative humidity unless noted otherwise in system information below.

Zone	Intended Product To Be Displayed	Avg Prod Temp °F/°C
All	Packaged Refrigerated Products	38°F / (3.3°C)

DIMENSION: xx"/(mm)


DIMENSION TOLERANCE +/- 0.25 (6.4)

SYMBOL KEY:
 ELECTRICAL JUNCTION BOX
 (SUPPLIED W/6" LEADS OR POWER CORD)

 TUB DRAIN LOCATION

 REMOTE REFRIGERATION
 LINE CONNECTION

OPTIONAL REMOTE REFRIGERATION:
 CONDENSATE DISCHARGE HOSE LOCATION,
 1/2" OD X 3/8" ID CLEAR TUBING

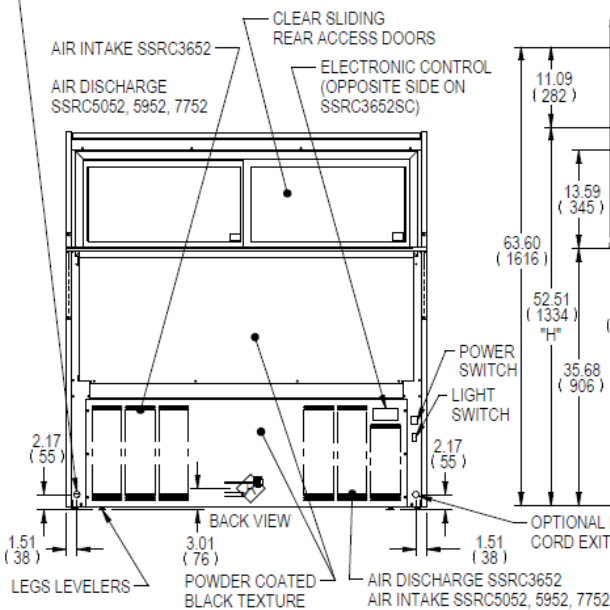

MODEL	DIMENSION						TUB DRAIN	SHELVING		TOP INTERIOR VOLUME CU FT	BOTTOM INTERIOR VOLUME CU FT	SELF CONTAINED				REFRIGERANT	SHIP WEIGHT LBS	REMOTE								
	L	D	H	L3	L4	L2	# OF TIERS	D	L1			PERMANENT CONNECT		OPTIONAL NEMA CORD & PLUG	PERMANENT CONNECT 2-WIRE + GROUND			2-WIRE + GROUND	REFRIGERANT	SHIP WEIGHT LBS	PERMANENT CONNECT 2-WIRE + GROUND	REFRIGERANT	BTU'S @+20"	CONDENSATE REMOVAL	SHIP WEIGHT LBS	
												2-WIRE + GROUND														MAX FUSE SIZE
												ELECTRICAL	AMPS													
in	in	in	in	in	in	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm					
SSRC3652	36.00	34.30	52.50	20.92	10.92	5.26	1	12.4	31.75	5.10	8.40	120/60/1	12.7	20	NEMA 5-20	R290	590 LBS	8.5	15	R449a	4,400	CONDENSATE PUMP	530 LBS			
SSRC5052	914	871	1334	531	277	134	1	12.4	806	7.10	11.80	208-	7.0	15	NEMA 6-15	R290	268 KILLO	10.0	15	R449a	5,400	CONDENSATE PUMP	240 KILLO			
	50.00	34.30	52.50	25.60	10.92	25.00		12.4	45.75			315					1162						240/60/1	327 KILLO	660 LBS	
	1270	871	1334	650	277	635		315	1162			240/60/1					327 KILLO						299 KILLO	660 LBS		
SSRC5952	59.00	34.30	52.50	26.70	10.92	29.47	1	12.4	54.75	8.50	14.00	208-	7.5	15	NEMA 6-15	R290	845 LBS	13.0	15	R449a	6,400	CONDENSATE PUMP	770 LBS			
	1499	871	1334	678	277	749		315	1391			240/60/1					383 KILLO						349 KILLO			
	77.00	34.30	52.50	26.70	10.92	38.47		12.4	72.75			11.20					18.30						208-	7.5	15	NEMA 6-15
SSRC7752	1956	871	1334	678	277	977	1	12.4	1848	11.20	18.30	240/60/1	7.5	15	NEMA 6-15	R290	458 KILLO	13.0	15	R449a	7,400	CONDENSATE PUMP	424 KILLO			

- Refrigerated cases are designed to operate in a maximum of 75°F (24°C) ambient and 55% relative humidity.
- Due to continuing engineering improvements, specifications are subject to change without notice.
- IF GFCI is required, a GFI Breaker must be used in lieu of GFCI receptacle.



The Signature of Quality®

FEDERAL INDUSTRIES

A Standex Company

215 Federal Avenue, Belleville, Wisconsin 53508-9201

Phone: 800-356-4206

Fax: 608-424-3234

Email: Geninfo@Federalind.com

Website: Federalind.com