



PREP TABLES REMOTE PT MAX


ITEM # _____

QTY. _____

PROJECT: _____

CONSULTANT: _____

33"R DEEP UNITS

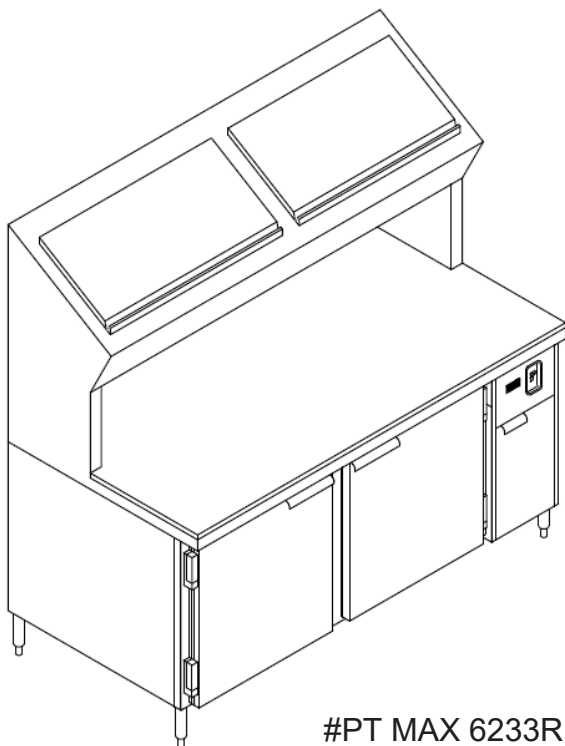

#PT MAX 6233R

CONSTRUCTION FEATURES

- **TOP** - ONE PIECE 14 GA. TYPE 300 STAINLESS STEEL WITH CHANNEL EDGE FRONT SIDE, TURN DOWN ENDS. TOP HAS MECHANICALLY COOLED REFRIGERATED RAISED RAIL AT REAR WITH OPENINGS TO ACCOMMODATE STANDARD PANS. (PANS NOT ENCLUDED)
- **RAIL/COLD WALL** - ALL STAINLESS CONSTRUCTION WITH BUILT IN 2-1/2" RECESSED LEDGE, R-448A EXPANSION VALVE, SOLENOID VALVE, THERMOSTAT AND DRAIN VALVE. STAINLESS HINGED COVER PROVIDED OVER THE OPENINGS. ON/OFF DEFROST SWITCH PROVIDED. TEMPERATURE IN RAIL IS MAINTAINED TO MEET NSF-7 REQUIREMENT.
- **EXTERIOR REAR AND BOTTOM** - 20 GA. GALVANNEAL.
- **FRONT AND ENDS** - 20 GA. STAINLESS STEEL
- **INTERIOR** - MANUFACTURED WITH COVED CORNER CONSTRUCTION USING ALL TYPE 300 STAINLESS STEEL. ALL UNITS FULLY INSULATED WITH HIGH DENSITY **FOAMED-IN-PLACE** POLYURETHANE.
- **DOORS** - 20 GA. STAINLESS STEEL WITH STAINLESS STEEL INTERIOR AND INSULATED WITH HIGH DENSITY **FOAMED-IN-PLACE** POLYURETHANE. DOORS ARE SELF CLOSING AND USE REMOVABLE SNAP-IN GASKETS FOR EASY CLEANING AND REPLACEMENT.
- **REFRIGERATION SYSTEM** - REMOTE UNITS. BOTTOM SECTION HAS AN EVAPORATOR BLOWER INSTALLED WITH R-448A EXPANSION VALVE AND SOLENOID VALVE. THERMOSTAT IS MOUNTED IN APRON. REFRIGERATOR MAINTAINS A TEMPERATURE IN COMPLIANCE WITH NSF.
- **LEGS** - 2" DIAMETER HEAVY DUTY ADJUSTABLE (6"-8") STAINLESS STEEL.
- **MECHANICAL COMPARTMENT** - HAS HINGED DOOR TO ACCESS LIQUID LINE, (1/4" OD) SUCTION LINE, (3/8" OD) AND ELECTRICAL J BOX FOR FINAL CONNECTIONS TO REFRIGERATOR.

OPTIONS AND ACCESSORIES

- | | |
|--|---|
| ☐ 1/2" THICK POLY CUTTING BOARD | ☐ PAN SLIDES (ON 24" DOORS ONLY) |
| ☐ 1/2" THICK RICHLITE CUTTING BOARD | ☐ FULL LENGTH RECESSED HANDLES |
| ☐ STAINLESS STEEL BACK | ☐ COATED BLOWER COIL |
| ☐ LEFT SIDE MECHANICAL HOUSING | ☐ ELECTRIC CONDENSATE EVAPORATOR |
| ☐ PLASTIC LAMINATE FRONT | ☐ SPECIAL BODY HEIGHT |
| ☐ PLASTIC LAMINATE LEFT END | ☐ CYLINDER LOCKS |
| ☐ PLASTIC LAMINATE RIGHT END | ☐ FLANGED FEET |
| ☐ PLASTIC LAMINATE REAR | ☐ S/S KICK PLATES |
| ☐ DIAL THERMOMETER | ☐ S/S CHANNEL BASE |

☐ OTHER: _____

NOTE: OTHER OPTIONS AND ACCESSORIES AVAILABLE. PLEASE SEE ACCESSORY PAGE AT THE END OF THIS SECTION.



EMI is the Leader in "PRE-ENGINEERED" Custom Fabrication

301 Division Street Boonton, NJ 07005
PHONE: (973) 423-0226 FAX: (973) 423-1638
TOLL FREE: (800) 322-9925

WEBSITE: www.emiindustries.com

EMI is constantly engaged in a program of improving our products. Therefore, we reserve the right to change specifications without prior notice.

**PAGE
A-5-1**



PREP TABLES REMOTE PT MAX


ITEM # _____

QTY. _____

PROJECT:

CONSULTANT:

33" DEEP UNITS

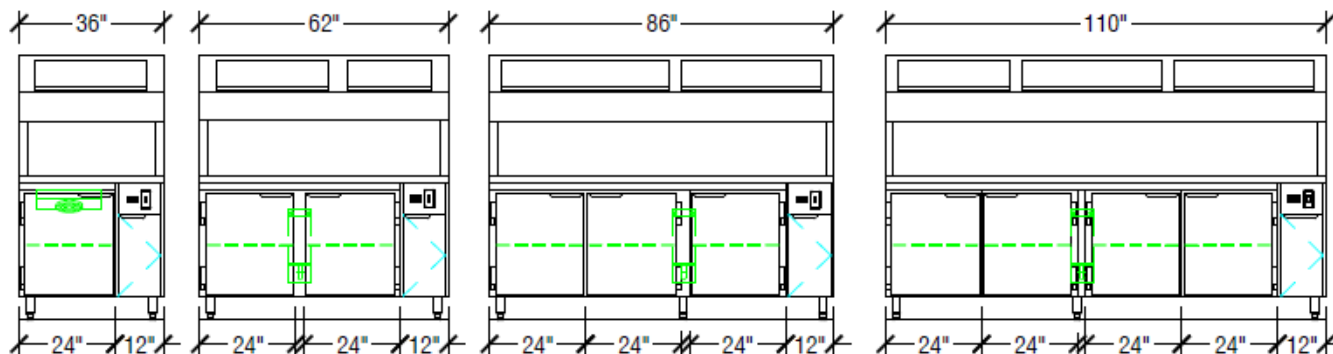

PTMAX3633R

PTMAX6233R

PTMAX8633R

PTMAX11033R



SPECIFICATION DATA

MODEL	DOORS	1/6 PAN, RAIL CAPACITY	CUBIC FEET	BTU's	VOLTAGE	AMPS	CRATED WEIGHT
PTMAX3633R	1 - 24"	8	6.6	2040	115/60/1	0.155	220
PTMAX6233R	2 - 24"	14	14.6	3080	115/60/1	0.240	380
PTMAX8633R	3 - 24"	22	22.6	3890	115/60/1	0.310	535
PTMAX11033R	4 - 24"	28	30.6	5080	115/60/1	0.440	650

MECHANICAL DATA

LEGEND

- R REFRIGERATION LINES 1/4"
- D LIQUID 3/8" SUCTION
- D 1/2" CONDENSATE DRAIN
- JB JUNCTION BOX FOR HARDWIRE CONNECTION
- S ON - OFF SWITCH FOR PAN RAIL

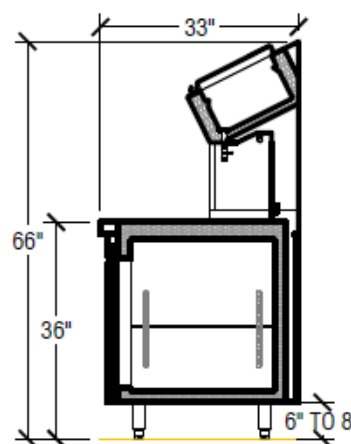

SECTION VIEW



EMI is the Leader in "PRE-ENGINEERED" Custom Fabrication

301 Division Street Boonton, NJ 07005
PHONE: (973) 423-0226 FAX: (973) 423-1638
TOLL FREE: (800) 322-9925

WEBSITE: www.emiindustries.com

EMI is constantly engaged in a program of improving our products. Therefore, we reserve the right to change specifications without prior notice.

**PAGE
A-5-2**