



Outperform every day.™

Project:
Item Number:
Quantity:

FIVE WELL HOT MODULES



Item Numbers			Description	
Standard	Manifold	Manifold w/ Auto-Fill	Control	Voltage
1000 Watts Per Well				
3640801	3640851	3640861	Infinite	208-240
3640811	3640871	3640881	Thermostatic	
625 Watts Per Well				
36408	3640850	3640860	Infinite	208
3640810	3640870	3640880	Thermostatic	
36475	3647550	3647560	Infinite	240
3647510	3647570	3647580	Thermostatic	

DESCRIPTION

Vollrath's five-well drop-ins keep hot foods at proper serving temperatures. They are designed for top-mount installation and do not require hard-wiring.

SHORT DESCRIPTION

Five-well hot-drop-in, flange and full-size wells, 300 series stainless steel, standard or manifold drains, insulated on all non-exposed sides, cord with plug, stainless steel remote control panel, mounting clips.

Note: Orders for drop-ins cannot be canceled or returned.

Note: Drop-in meets NSF4 performance standards only when using moist heat. Operation with water is required for even heating of the food product.

FEATURES

- Top flange and drawn well are 300 series stainless steel
- Include gasket for under drip edge
- Standard drain is ½" (1.3 cm) with individual well ball valves
- Manifold drain is 1" (2.5 cm) copper tubing with master manifold shut off
- Insulated on all sides, including between each well
- Includes 6' (1.8 m) cord with plug. Does not require hard-wiring
- Stainless steel control panel with individual controls and power indicator light for each well
- Control panel has 4' (121.9 cm) tethered connection for flexible mounting locations
- Includes standard mounting clips for use on counters up to 3" (7.6 cm) thick for easy installation
- Accepts full-size and fractional pans up to 6" (15.2 cm) deep
- Adapter bars are recommended when using fractional pans

WARRANTY

All models shown come with Vollrath's standard warranty against defects in materials and workmanship. For full warranty details, please refer to www.Vollrath.com.

ACCESSORIES

- Sheet pan adapter available. Item No. 19186.

CLEARANCE AND ENVIRONMENT REQUIREMENTS

- Zero-clearance installation
- Indoor use only. Room temperature and HVAC can effect performance temperatures

Agency Listings



Due to continued product improvement, please consult www.vollrath.com for current product specifications.

Approvals	Date




Outperform every day.™
www.vollrath.com

The Vollrath Company, L.L.C.
1236 North 18th Street
Sheboygan, WI 53081-3201 U.S.A.
Customer Service: 800.628.0830
Canada Customer Service: 800.695.8560
Main Fax: 800.752.5620 or 920.459.6573




Technical Services: 800.628.0832
Technical Services Fax: 920.459.5462

FIVE WELL HOT MODULES

DIMENSIONS (Shown in inches (cm))

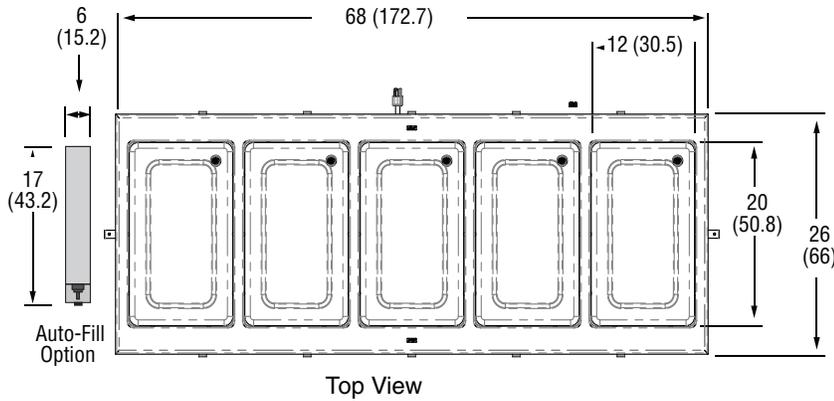

Control Panel Cutout

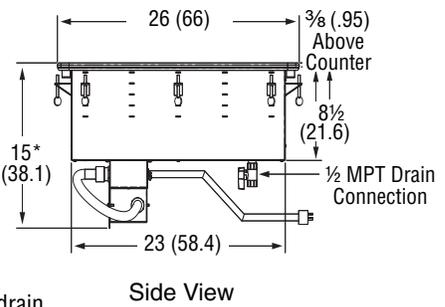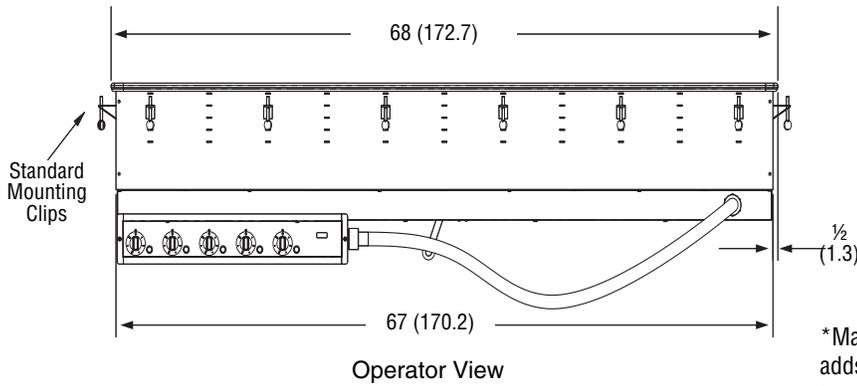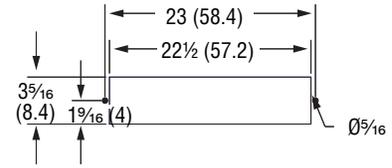


*Manifold drain adds 6 1/2 (16.5) to overall height

ELECTRICAL SPECIFICATIONS

Standard	Manifold	Manifold w/ Auto-Fill	Control	Cutout Dimension IN (CM)	Voltage	Amps	Plug
1000 Watts Per Well							
3640801	3640851	3640861	Infinite	67 1/4 x 25 1/4 (170.8 x 64.1)	208-240	18-20.8	NEMA 6-30P
3640811	3640871	3640881	Thermostatic				
625 Watts Per Well							
36408	3640850	3640860	Infinite	67 1/4 x 25 1/4 (170.8 x 64.1)	208	11.3	NEMA 6-20P
3640810	3640870	3640880	Thermostatic				
36475	3647550	3647560	Infinite		240	13.0	
3647510	3647570	3647580	Thermostatic				

Straight Blade Receptacles



Note: Cutout must have a 7/8" (2.2 cm) corner radius.

NOTICE: Do NOT modify the cord or plug on the drop-in. Modifying any component may damage the drop-in or cause injury, and will void the warranty.



Outperform every day.™

www.vollrath.com

The Vollrath Company, L.L.C.
1236 North 18th Street
Sheboygan, WI 53081-3201 U.S.A.
Customer Service: 800.628.0830
Canada Customer Service: 800.695.8560
Main Fax: 800.752.5620 or 920.459.6573

Technical Services: 800.628.0832
Technical Services Fax: 920.459.5462