



HIGH TEMPERATURE SINGLE RACK POT WASHER

PT-15

High Temperature
Pot Washer



FEATURES

- 4 Cycles; 5 minute, 6 minute, 8 minute & 10 minute.
- Fully automatic cycle for easy operation.
- 5" touch display constantly informs user of machine status. Controls are easy to understand and simple to operate.
- Double skin for quiet operation.
- Auto start/stop makes operation safe and easy.
- Integrated scrap tray.
- Water inlet comes with built-in strainer, prevents debris from clogging the water valve.
- Pumped final rinse.
- Stainless Steel scrap tray, long lasting.
- Unique spray arm system features upper and lower stainless steel wash arms.
- Large 31-3/4" height accommodates large pots and sheet pans.
- Includes 21-3/4" X 26-1/4" stainless steel rack.
- Uses 1.1 gallons per cycle.
- Standard gravity drain.

CMA
mixer
MIZER®
Registered Trademark




PT-15

High Temperature
Single Rack Pot Washer

WARNINGS:

- Electrical and Plumbing connections must be made by a qualified service company who will comply with all available Federal, State, and Local Health, Electrical, Plumbing and Safety codes.
- CMA recommends utilizing a water softening system to maintain water hardness measurements of 3.5 gpg (grains per gallon) or less. This will assure maximum results and optimum operation of the dishmachine.

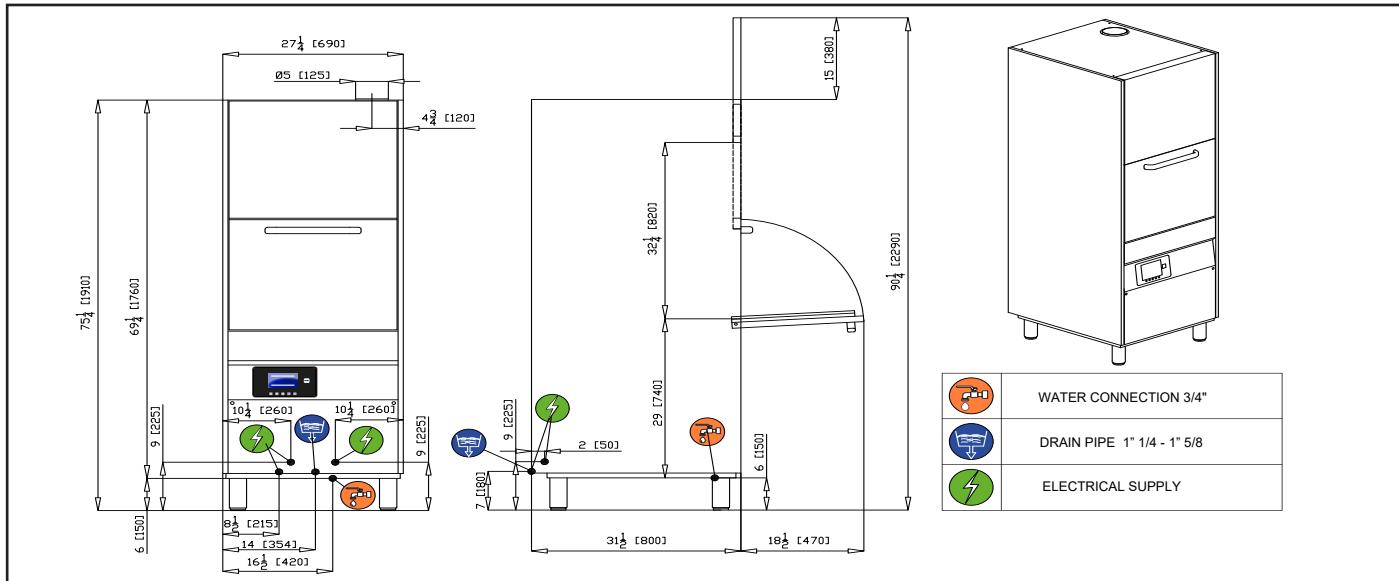

Specifications:

MODEL PT-15

	USA	METRIC	USA	METRIC		
WATER CONSUMPTION			DIMENSIONS			
PER RACK	1.1 GAL	4.2 L	DEPTH	31-1/2" 80.0cm		
12 Racks per hour	13.2 GAL	50.0 L	WIDTH (OUTSIDE DIMENSION)	27-1/4" 69.0cm		
10 Racks per hour	11.0 GAL	41.6 L	TOTAL HEIGHT WITH DOOR OPEN	90-1/4" 229.0cm		
7 Racks per hour	7.7 GAL	29.1 L	MAX CLEARANCE FOR DISHES	31-3/4" 80.5cm		
6 Racks per hour	6.6 GAL	25.0 L	DRAIN CONNECTION (OFF FLOOR)	6" 15.2cm		
OPERATING CAPACITY			DISHRACK DIMENSIONS	21-3/4" x 26-1/4" 55.0 x 66.5cm		
RACKS PER HOUR	12/10/7/6	12/10/7/6				
WASH TANK CAPACITY	13.2 GAL	50.0 L	ELECTRICAL RATING	VOLTS	PHASE	AMPS
PUMP CAPACITY	250 GPM	950 LPM	WITH BOOSTER	208 240	3 3	32.2 35.3
WATER REQUIREMENTS						
WATER INLET	3/4"	1.9cm	APPROXIMATE SHIPPING WEIGHT			
DRAIN CONNECTION	2"	5.1cm				
OPERATING TEMPERATURE			SHIPPING DIMENSIONS	PALLET & BOX @ 00" X 00" X 00"		
WASH-°F (MIN)	165°F	71°C				
RINSE-°F (MIN)	185°F	85°C				

Summary Specifications: Model PT-15

The model PT-15 single tank, high temperature pot washer is designed for years of trouble free service, producing sparkling results while conserving energy, water and chemicals. The PT-15 is NSF, UL, CUL approved. Constructed of stainless steel.

Advisory: CMA does NOT endorse "Tankless On-Demand" water heaters for use on CMA Dishmachine products. CMA DOES endorse, and highly recommends, the standard "tank" style water heaters, sized properly to handle each particular facility with their water heating requirements.

CMA
WELBILT
Registered Trademark

CMA Dishmachines 17707 Valley View Ave; Cerritos, CA 90703 • 800-854-6417 • 714-898-8781 • Fax: 714-895-2141 • www.cmadishmachines.com

CMA reserves the right to modify specifications or discontinue models without prior notification.

© 01-2025 CMA, Inc.

