FEDERAL INDUSTRIES
A Standex Company
215 Federal Avenue
Belleville, Wisconsin 53508-9201
Phone: 800-356-4206
Fax: 608-424-3234
Email: Geninfo@Federalind.com
Website: Federalind.com

Project Name:_____

Item #:_____

Model #: _____ Qty:_____

Approval:_____

AIA #

SIS #

VISION SERIES - Slim-Line Display Case - 60"

Designed to help you make the most of your limited space with a slim 24" depth while delivering a bold, attention-grabbing design that highlights your merchandise.

MODEL	DIMENSIONS (Includes End Panels)
☐ VRSL3660S	36 x 24 x 60 (in) 914 x 610 x 1524 (mm)
☐ VRSL4860S	47.25 x 24 x 60 (in) 1200 x 610 x 1524 (mm)
☐ VRSL6060S	59.25 x 24 x 60 (in) 1505 x 610 x 1524 (mm)
☐ VRSL7260S	71.25 x 24 x 60 (in) 1810 x 610 x 1524 (mm)



Model VRSL7260S
Shown with Options

OPTIONAL ACCESSORIES

- ☐ White interior (including shelves)
- ☐ Stainless steel interior (including shelves)
- ☐ Stainless steel or glass shelves in lieu of black
- ☐ 3500K LED lights below shelves
- ☐ Additional lighted 3500K LED shelf
- ☐ Field Install - High-capacity condensate evaporator assembly - Separate (1500W 120V, 15 AMP circuit required)
- ☐ Self-cleaning condenser
- ☐ Stainless steel exterior finish
- ☐ Premium exterior laminate
- ☐ Graphics package
- ☐ Solid end panels (mirrored interior)
- ☐ Reflective end glass
- ☐ Clear or reflective glass, sliding rear doors (Solid hinged on 36" cases)
- ☐ 6" legs (152mm)
- ☐ Seismic legs
- ☐ Skirt w/4" casters or legs
- ☐ 2 1/2" (63.5mm) recessed or 4" (101.6mm) casters (self-contained models only) (Weight limits may apply)
- ☐ Joining kit for continuous line-ups (not available with casters)
- ☐ Front wire display basket
- ☐ Front cart bumper
- ☐ Roll-Down locking security cover (black, white, or gray)
- ☐ Black polycarbonate removable locking security cover

***Additional options available on the website and price list.**

STANDARD FEATURES

Model Features

- Black interior including shelves
- Stainless steel display deck
- Tempered glass ends
- Black powder coated base frame
- Moisture resistant end panel construction
- Choice of standard colors on lower millwork panel
- Black trim
- Adjustable leg levelers
- Cord & 90 degree plug, self-contained only
- Front air intake / front discharge
- Energy saving night curtain

Refrigeration

- R290 refrigerant
- Electronic temperature control maintains 38°-40°F (3.3°-4.4°C) Note: Case temperatures will vary if the air curtain is disrupted.
- Digital thermometer
- Clear coil on demand defrost
- Coated evaporator coil

Shelving

- Two tiers of adjustable black metal shelves with black price tag molding
- Shelves can be flat or slanted down at 10°

Lighting

- 3500K LED top light

Agency Approvals

- UL, C-UL and UL Sanitation listed to NSF-7, Type I conditions
- DOE 2017 compliant

Made in America

DOE 2017 Energy Efficiency Compliant

c UL us

ANSI/NSF 7

REVIT

WARRANTY*
One year Parts and Labor
2nd thru 5th year part only service compressor
(U.S.A. and Canada)


Note: Information is subject to change at any time. Visit www.federalind.com for the most current specs.

Revised 7/28/2025

AIA #	**VISION SERIES - Slim-Line Display Case - 60"**
SIS #	Product Specifications

Intended Environment: Type I (Self-Contained) - Designed to operate in maximum ambient conditions of 75°F (24°C) and 55% relative humidity.

Zone	Intended Product To Be Displayed	Avg Prod Temp °F/°C
All	Packaged Refrigerated Products	38°F / (3.3°C)

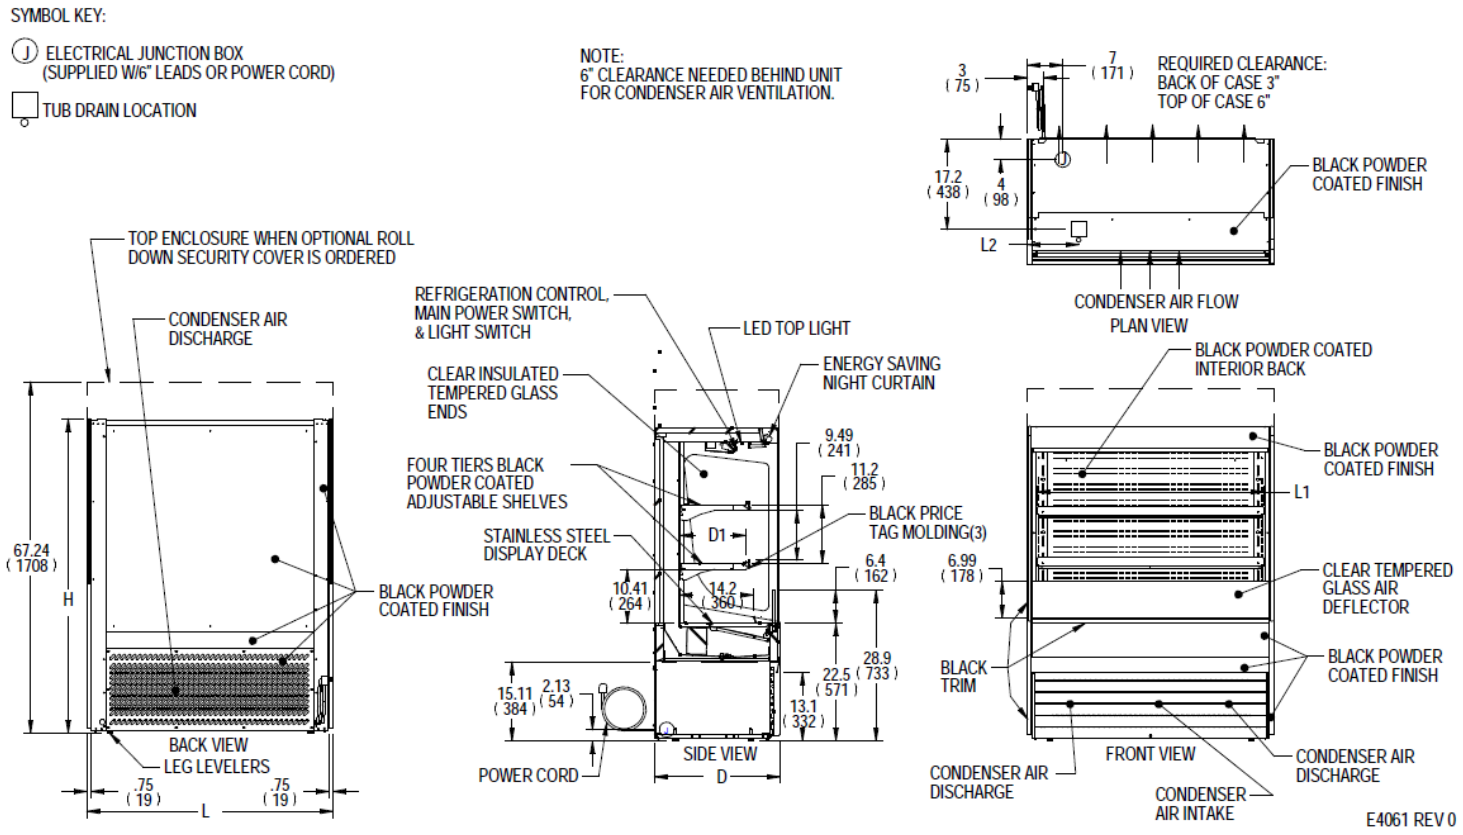

MODEL	DIMENSIONS L in / mm	D in / mm	H in / mm	TUB DRAIN L2 in / mm	SHELVING # OF TIERS	L1 in / mm	D1 in / mm	INTERIOR VOLUME CU FT	SELF CONTAINED ELECTRICAL 2 WIRE + GROUND	STANDARD CONNECTION CORD & PLUG AMPS	MAX FUSE SIZE	NEMA CORD &	REFRIGERANT	CONDENSATE REMOVAL	SHIP WEIGHT LBS / KILO
VRSL3660S	36	24	60	6.74	2	32.25	12.6	13.30	120/60/1	16	20	NEMA 5-20P	R290	INTEGRATED PAN	500
	914	610	1524	171		819	320								227
VRSL4860S	47.25	24	60	13.49	2	43.25	12.6	17.70	208-240/60/1	11	15	NEMA 6-15P	R290	INTEGRATED PAN	590
	1200	610	1524	343		1099	320								268
VRSL6060S	59.25	24	60	14.12	2	55.25	12.6	22.70	208-240/60/1	16	20	NEMA 6-20P	R290	INTEGRATED PAN	750
	1505	610	1524	359		1403	320								340
VRSL7260S	71.25	24	60	20.12	2	67.25	12.6	27.60	208-240/60/1	16	20	NEMA 6-20P	R290	INTEGRATED PAN	810
	1810	610	1524	511		1708	320								367

- Due to continuing engineering improvements, specifications are subject to change without notice
- Case temperature will vary if the air curtain is disrupted.

DOE 2017 Energy Efficiency Compliant

c UL us

ANSI/NSF 7

FEDERAL
The Signature of Quality

FEDERAL INDUSTRIES
A Standex Company
215 Federal Avenue Belleville, Wisconsin 53508-9201

Phone: 800-356-4206
Fax: 608-424-3234
Email: Geninfo@Federalind.com
Website: Federalind.com