




Your Solutions Partner

# Specifications

F.O.B. Sedalia, Missouri 65301

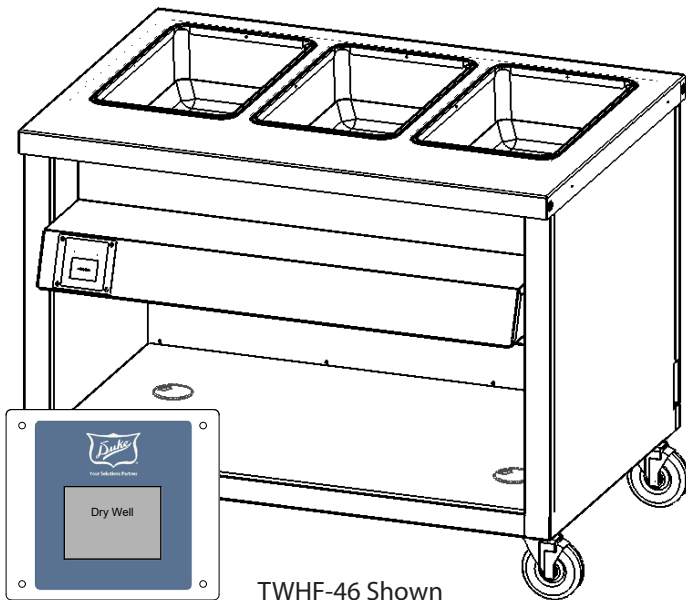

TWHF-46 Shown

## OPTIONS:

- ☐ 3 Phase Wiring
- ☐ 14 gauge tops
- ☐ Internal locking devices
- ☐ Foodshields
- ☐ Workshelves
- ☐ Trayslides
- ☐ 8' or 10' cord and plug
- ☐ Veneered plastic laminate panels on body
- ☐ Powder coat paint colors
- ☐ 6" adjustable legs in lieu of casters
- ☐ Kickplates s/s or p/g
- ☐ 34" ADA height (units finish at 33.5"). Adjustable height casters with 5/8" adjustability allow leveling to 34".

## Agency Listings:



DUKE MANUFACTURING CO.

2305 N. Broadway

St. Louis, MO 63102

800.735.3853 Toll Free

314.231.5074 Fax

[www.dukemfg.com](http://www.dukemfg.com)

SS-1255 Ganged Waterless Well – Thurmaduke

## Approval Stamp(s):

### PRODUCT INFORMATION:

PROJECT: \_\_\_\_\_

ITEM: \_\_\_\_\_

QUANTITY: \_\_\_\_\_

MODEL:

### Thurmaduke™ Serving Systems Ganged Waterless Well

- ☐ **TWHF-32** 32" length unit, 2 top openings
- ☐ **TWHF-46** 46" length unit, 3 top openings
- ☐ **TWHF-60** 60" length unit, 4 top openings
- ☐ **TWHF-74** 74" length unit, 5 top openings
- ☐ **TWHF-88** 88" length unit, 6 top openings

### TOP:

- 16 gauge, 300 Series stainless steel
- Die-stamped openings - 11-7/8" x 19-7/8"

### Heat Compartments:

- 6-1/2" deep stainless steel liner for dry operation only
- 6' Cord and plug
- Includes Silicone bottom pad
- Fully Insulated
- Rope element in each compartment

### CONTROLS:

- Standard intuitive, easy to use touch screen control - One control for all wells
- Easily adjusted presets LOW/MED/HIGH
- Built in WIFI and Bluetooth for future connectivity.

### BODY:

- ☐ **Choice of (12) powder coat paint colors**
- ☐ **Stainless steel body**
  - Operator's side open to bottom shelf
  - Customer side and ends fully enclosed
  - Bottom shelf paint grip or stainless steel to match body
  - Recessed stainless steel dish shelf




Specification subject to change



**WARNING** For CA residents: go to [www.dukemfg.com/prop65](http://www.dukemfg.com/prop65) for prop 65 warning

# Thurmaduke®

## Ganged Waterless Well

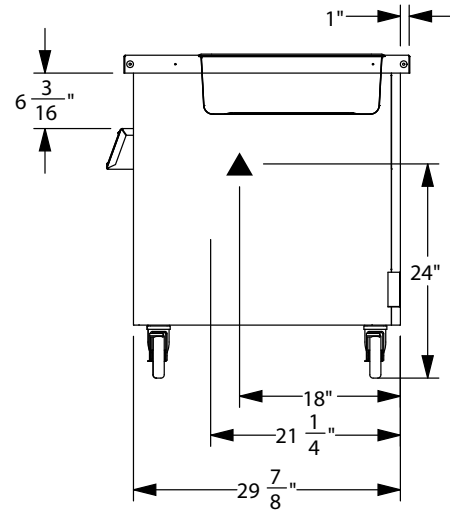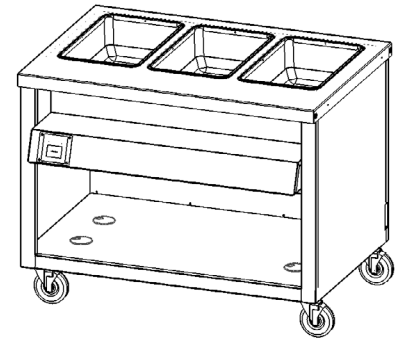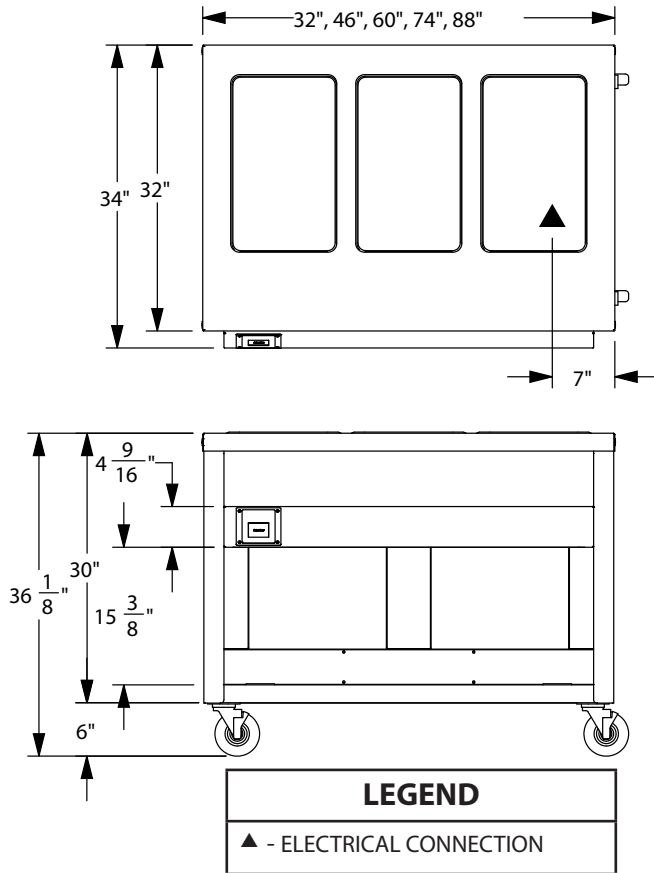

### DIMENSIONS:


Freight Class: 150

| Model   | Length |       | Width |      | Height |      | Cube ft.<br>crated | Weight |       | Top<br>Openings |
|---------|--------|-------|-------|------|--------|------|--------------------|--------|-------|-----------------|
|         | in     | cm    | in    | cm   | in     | cm   |                    | lbs    | kg    |                 |
| TWHF-32 | 32     | 81.3  | 32    | 81.3 | 36     | 91.4 | 34.8               | 253    | 115.0 | 2               |
| TWHF-46 | 46     | 116.8 | 32    | 81.3 | 36     | 91.4 | 47.7               | 327    | 148.6 | 3               |
| TWHF-60 | 60     | 152.4 | 32    | 81.3 | 36     | 91.4 | 60.5               | 400    | 181.8 | 4               |
| TWHF-74 | 74     | 188.0 | 32    | 81.3 | 36     | 91.4 | 73.3               | 482    | 219.1 | 5               |
| TWHF-88 | 88     | 223.5 | 32    | 81.3 | 36     | 91.4 | 86.2               | 595    | 270.5 | 6               |


### ELECTRICAL SPECIFICATIONS:

| Model   | 120V 665W |      |       | 208V 500W |      |        | 240V 665W |      |        |
|---------|-----------|------|-------|-----------|------|--------|-----------|------|--------|
|         | Watt      | Amps | NEMA  | Watt      | Amps | NEMA   | Watt      | Amps | NEMA   |
| TWHF-32 | 1414      | 11.8 | 5-15  | 1084      | 5.2  | L14-20 | 1414      | 5.9  | L14-20 |
| TWHF-46 | 2083      | 17.4 | L5-30 | 1588      | 7.6  | L14-20 | 2083      | 8.   | L14-20 |
| TWHF-60 | 2748      | 22.9 | L5-30 | 2088      | 10   | L14-20 | 2748      | 11.5 | L14-20 |
| TWHF-74 | 3417      | 28.5 | 5-50  | 2592      | 12.5 | L14-20 | 3417      | 14.2 | L14-30 |
| TWHF-88 | N/A       |      |       | 3092      | 14.9 | L14-30 | 4082      | 17.0 | L14-30 |

### Control Specifications

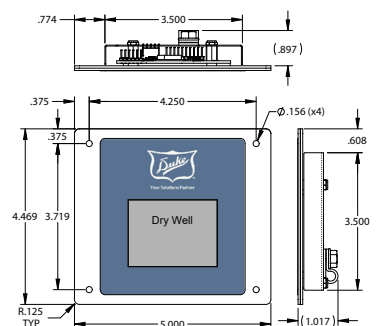

### Control Cutout



**Duke Manufacturing Co.**  
2305 N. Broadway  
St. Louis, MO 63102

Phone: 314-231-1130  
Toll Free: 1-800-735-3853  
Fax: 314-231-5074

www.dukemfg.com

Printed in U.S.A.  
© 2025, Duke Manufacturing Co.