


CANTILEVER SHELVES

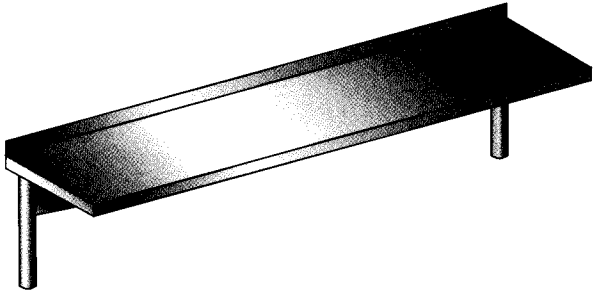

STAINLESS STEEL CANTILEVER SHELVES

Model No.	Length	Model No.	Length	Model No.	Length
12" Wide		14" Wide		16" Wide	
COS-3612	36"	COS-3614	36"	COS-3616	36"
COS-4812	48"	COS-4814	48"	COS-4816	48"
COS-6012	60"	COS-6014	60"	COS-6016	60"
COS-7212	72"	COS-7214	72"	COS-7216	72"
COS-8412	84"	COS-8414	84"	COS-8416	84"
COS-9612	96"	COS-9614	96"	COS-9616	96"
COS-10812	108"	COS-10814	108"	COS-10816	108"
COS-12012	120"	COS-12014	120"	COS-12016	120"
COS-13212	132"	COS-13214	132"	COS-13216	132"
COS-14412	144"	COS-14414	144"	COS-14416	144"

Weight: 5 lbs. (2.3 kilos)
per linear foot.

Weight: 6 lbs. (2.7 kilos)
per linear foot.

Weight: 7 lbs. (3.2 kilos)
per linear foot.

FEATURES

Shelves are 16 Gauge Type 304 S/S with rear turned up 2". Front and sides formed down 1 1/2" at 90° and back 1/2" at 45°. Shelves supported with 1 5/8" OD S/S Tubing and 16 Gauge S/S triangular gusset plates. Shelves 84" and longer require three supports. Cantilever shelves require factory installation.


CONSTRUCTION

Shelves shall be die formed.

Brackets shall be welded to tubular posts which extend through backsplash and attach to table bracing.

All corners shall be TIG welded with all exposed welds ground and polished to match adjacent surfaces (#4 Grain Finish).

MICROWAVE SHELVES



STAINLESS STEEL MICROWAVE SHELVES

Model No.	Size (LxW)	Approx. Weight (lbs.) (kg)	
MWS-1824	18"x24"	15	7
MWS-24	24"x24"	20	9

FEATURES

Shelves are 16 Gauge Type 304 S/S. Front formed down 1 1/2" at 90° and back 1/2" at 45°. Back formed up 12" with nine pre-punched holes for securing to wall.

CONSTRUCTION

All sides shall be die formed to create sturdy and rigid one-piece unit.

All closed corners shall be TIG welded with all exposed welds ground and polished to match adjacent surfaces (#4 Grain Finish).

Universal Stainless is constantly engaged in a program of improving products and, therefore, reserves the right to change specifications without prior notice.