



PERLICK®



MODEL NUMBERS - TSF12CS

UNDERBAR COMBO SINK



TSF12CS



JOB	
AREA	
ITEM NO.	
MODEL NO.	

MODELS

TSF12CS

KEY PRODUCT FEATURES AND BENEFITS

- Space saving design combines hand sink & wet waste sink in one compact footprint
- Two faucet design allows for traditional hand sink operation while foot pedals operate dump sink faucet for easy cleaning of shaker tins.
- Drawn 18 gauge stainless steel sink bowl & all stainless steel construction for long life span in heavy use bar environments
- Optional Perlick Flex Mount leg relocation kit moves rear legs forward for additional space behind equipment or moves forward legs rearward to help avoid pesky floor drains.

Additional Features:

- Side splashes available for left and right side, top and bottom
- Easy access soap dispenser allows for tool free re-fill
- Lift out, stainless steel perforated sink strainer included in dump sink
- Our underbar equipment utilizes our Perlick Quick Clamp leg attachment for superior rigidity
- Design optimizes dump sink access to increase bartender efficiency during service
- Stainless steel legs with adjustable thermoplastic feet, install without tools for free standing applications

OPTIONS

MODEL NOS.	DESCRIPTION
1040928	Side splash top left 14 gauge
1054708	Side splash top right 14 gauge
1040929	Side splash top left 18 gauge
1054711	Side splash top right 18 gauge
1054692	Side splash bottom left 14 gauge
1054693	Side splash bottom right 14 gauge
1054722	Side splash bottom left 18 gauge
1054724	Side splash bottom right 18 gauge

Form No. TSF12CS.1
Rev 6.5.25






PERLICK®



MODEL NUMBERS - TSF12CS

UNDERBAR COMBO SINK

MODEL NOS.		TSF12CS
DIMENSIONS: EXTERIOR (mm)	Depth	24" (609.6)
	Width	12" (304.8)
	Weight lbs (kg)	32 (14.5)
MATERIALS	Hand Sink Bowl	Stainless steel, all horizontal and vertical edges 1-1/2" radius with balled corners. Furnished with 1-1/2" drain socket.
	Legs	1-5/8" Tubular, stainless steel with 1" adjustable thermoplastic foot
	Wet Waste Pan	1055201
PLUMBING	Sink	1-1/2" NPS male for both hand & dump sink
	Faucet	Hot and cold connection. 3/8" Compression 9/16-24 thread. Faucet includes 18" braided stainless leads. Hand Sink: Wall mount goose neck Dump Sink: Wall mount swing-spout
OPTIONAL ACCESSORIES	Side Splash	Bottom left 14 gauge, 1054692 Bottom right 14 gauge, 1054693 Bottom left 18 gauge, 1054722 Bottom right 18 gauge, 1054724 Top left top left 14 gauge, 1040928 Top right top left 14 gauge, 1054708 Top left top left 18 gauge, 1040929 Top right top left 18 gauge, 1054711
	Leg Relocation Kit	Perlick Flex Mount leg kit allows the rear legs to move forward giving you 7" of clearance behind the rear legs to the back of the equipment (see leg relocation installation guide) PN: 1039805

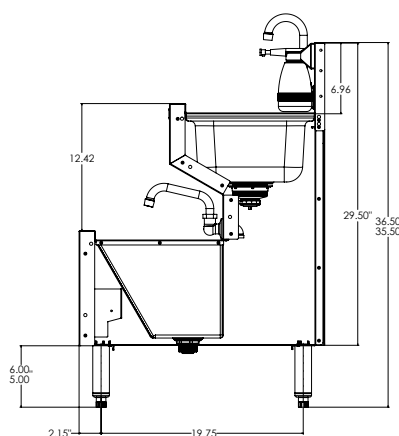

*Shown without side panel to show drain detail

Form No. TSF12CS.1
Rev 3.17.25