



MECHANICALLY ASSISTED REFRIGERATED COLD PAN TABLES WITH ENCLOSED BASE



MACP-3-BS Shown



Intertek



Intertek

Item #: _____ Qty #: _____

Model #: _____

Project #: _____

NOTE: Units are not designed to cool foods originally warm. Food should already be chilled to maintain the proper temperatures

FEATURES:

High nominal cooling capacity for consistent product temperature control

Aluminum encased copper tube evaporator panels improve heat transfer by increasing contact area. This increases operating efficiency and reduces power consumption

Expansion valve for efficient operation at various temperature conditions

Refrigerant filter drier to insure cleanliness of sealed refrigeration circuit

Sight glass to insure a properly charged refrigeration system

Liquid receiver for improved refrigerant charge control

Low running current suitable for any 115 volt circuit

Precision electronic thermostat for exact temperature control

Stainless steel shelf with removable 3/8" thick poly cutting board - Ships K.D.

MATERIAL:

TOP: 18 gauge #304 stainless steel welded open frame

LINER: Constructed of 18 gauge, 304 stainless steel, one piece construction, all welded, ground and polished to a uniform finish. All corners are coved with a 1/4" radius.

CABINET BASE: 20 gauge #304 stainless steel

PLUMBING: 1" I.P.S. drain

REFRIGERATION SYSTEM: The compressor is housed in a 16 gauge galvanized under structure, fabricated from formed angles and bolted to the galvanized jacket. The fully self contained condensing unit is provided with a hermetically sealed compressor with a digital, programmable thermostat. The system is fully charged with environmentally friendly R290 refrigerant.

LEGS: 18 gauge #302 stainless steel with fully adjustable non-marking tip plastic bullet foot

CUTTING BOARD: White Thermoplastic

CUTTING BOARD BRACKETS: 16 gauge #302 stainless steel

ELECTRICAL:

Unit will be wired for 15 amps, 120V single phase operation with an on/off thermostat switch

MACP-2 & MACP-3: 115 V, 8 AMPS, 60 Hz, 1/5 HP

MACP-4 & MACP-5: 115 V, 8 AMPS, 60 Hz, 1/3 HP

Includes 6 ft. long, 3 wire cord with a NEMA 5-15P plug

Model	Length (L)	Width	Opening Size (A x B)	Drain Distance (C)	Refrigerant	Wt (lbs.)	Cu. Ft.
MACP-2-BS	31-13/16"	30-3/4"	27-5/16" x 20"	26-3/4"	R290	230	39
MACP-3-BS	47-1/8"	30-3/4"	42-5/8" x 20"	41-11/16"	R290	256	56
MACP-4-BS	62-1/2"	30-3/4"	57-1/2" x 20"	57"	R290	380	73
MACP-5-BS	77-3/4"	30-3/4"	73-1/4" x 20"	72-5/16"	R290	465	90

***Width Includes 8" Cutting Board**



**SU-P-234 - 6' with
NEMA 5-15 plug Included**

OPTIONAL ACCESSORIES

SU-45A 12" x 1" Adapter Bar

SU-45B 20" x 3" Adapter Bar



WARNING: Refrigerated Equipment on this page may expose you to chemicals, including Ethanes, that are known to the State of California to cause cancer or birth defects or other reproductive harm. For more Info., visit www.p65warnings.ca.gov



Customer Service Available To Assist You 1-800-645-3166 8:30 am - 7:00 pm E.S.T.

For Orders & Customer Service:

Email: customer@advancetabco.com or Fax: 631-242-6900

For Smart Fabrication™ Quotes:


Email: smartfab@advancetabco.com or Fax: 631-586-2933

DIMENSIONS and SPECIFICATIONS

TOL $\pm .125"$

ALL DIMENSIONS ARE TYPICAL

SIDE VIEW

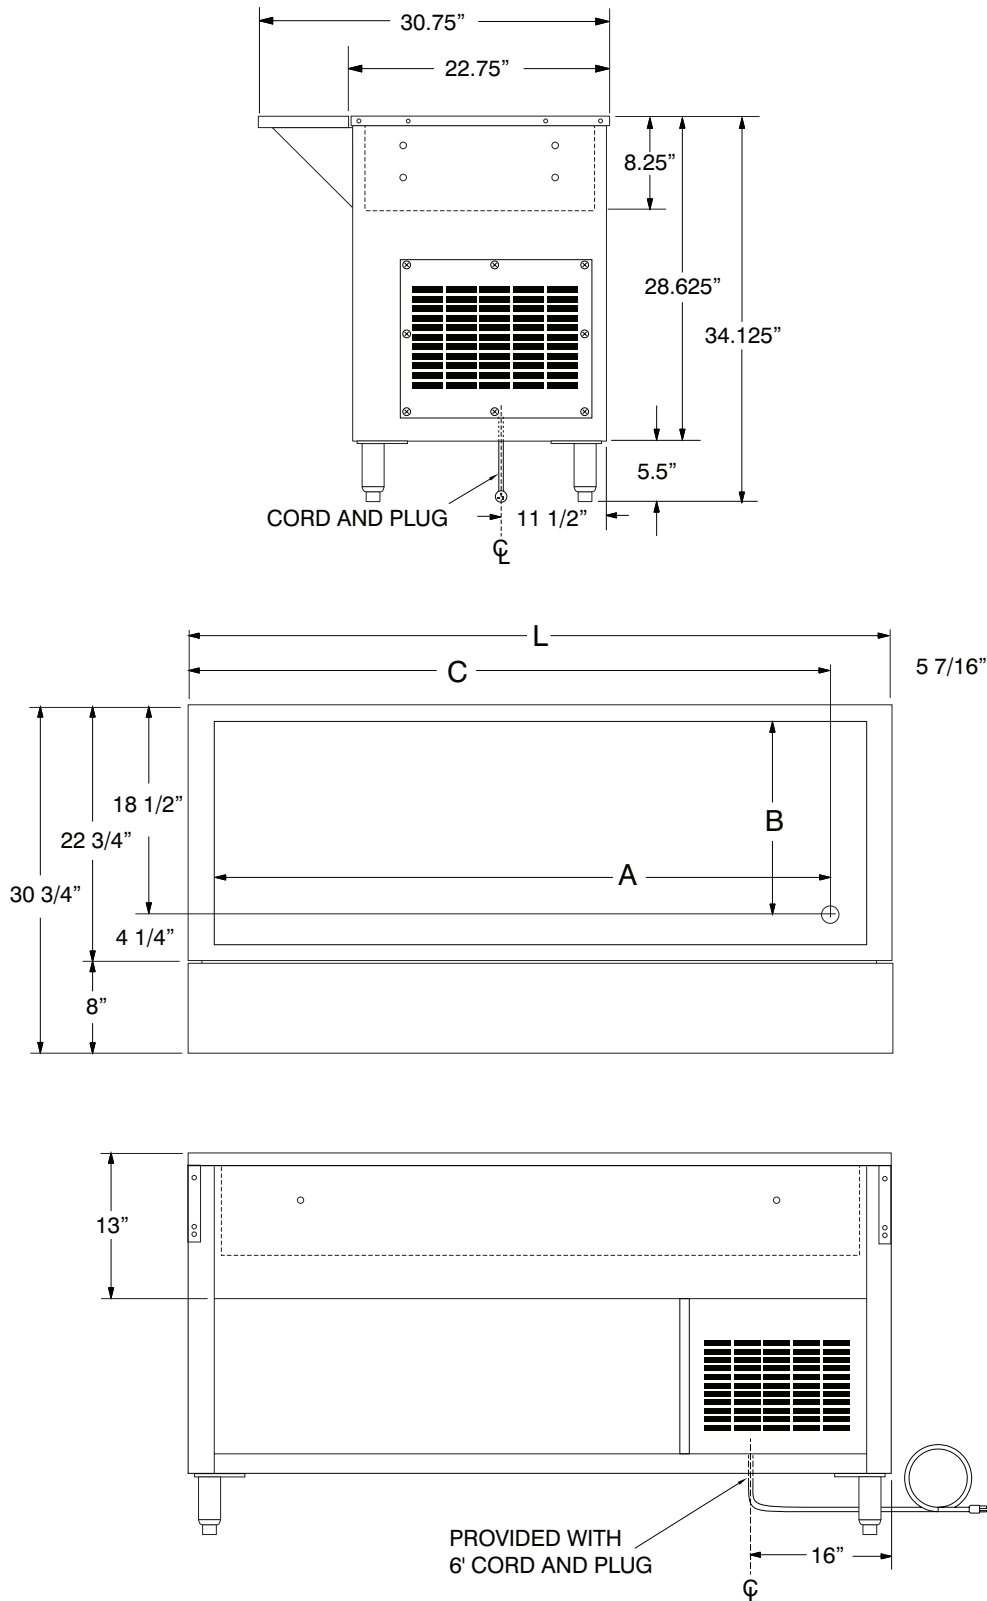

REF-V

325 Wireless Boulevard, Hauppauge, NY 11788

ADVANCE TABCO is constantly engaged in a program of improving our products. Therefore, we reserve the right to change specifications without prior notice.

© ADVANCE TABCO, JUNE 2025